


Submitted Model No.:


## **Specific Features:**

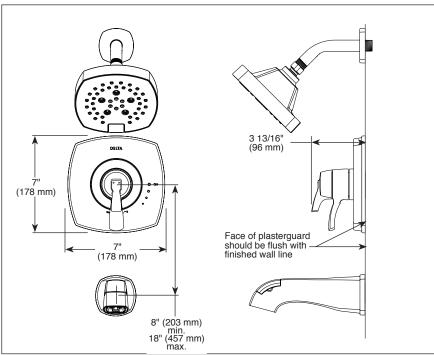

3 15/16" (99 mm)

6"

(152 mm)

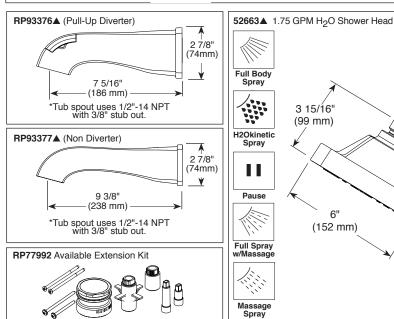

▲ Designate Proper Finish Suffix



see what Delta can do

# TUB AND SHOWER **FAUCET TRIM**

- Stryke<sup>™</sup> Bath Collection
- Valve Only (T17076)
- Shower Only (T17276)
- Tub/Shower (T17476)

#### **FEATURES:**

- Monitor® 17 Series thermostatic valve cartridge
- Five-setting H<sub>2</sub>Okinetic® Technology shower head

#### **STANDARD SPECIFICATIONS:**

- Thermostatic wax element maintains the outlet temperature to ± 3.6 °F
- Max. flow rate 1.75 gpm @ 80 psi, 7.60 L/min @ 550 kPa.
- For use with MultiChoice® Universal rough valve body. (R10000 Series)
- Back-to-back installation capability.
- Lever volume control handle; temperature adjustment dial.
- Field adjustable to limit handle rotation into hot water zone.
- All parts replaceable from the front of the valve.
- Red/blue pad print temperature indicators on temperature adjustment dial.
- Stem extension kit RP77992 can be ordered to allow for an additional 1 3/4" wall thickness. RP77992 ships with chrome escutcheon screws.

## WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



# **COMPLIES WITH:**

ASME A112.18.1 / CSA B125.1

ADME ATIZ.10.17 CAN DIZ.3.1
Indicates compliance to
ICC/ANSI A117.1 - Valve control only

EPA WaterSense® - Applies to T17276, T17476, and 52663 only