


**Submitted Model No.:** 

Specific Features:

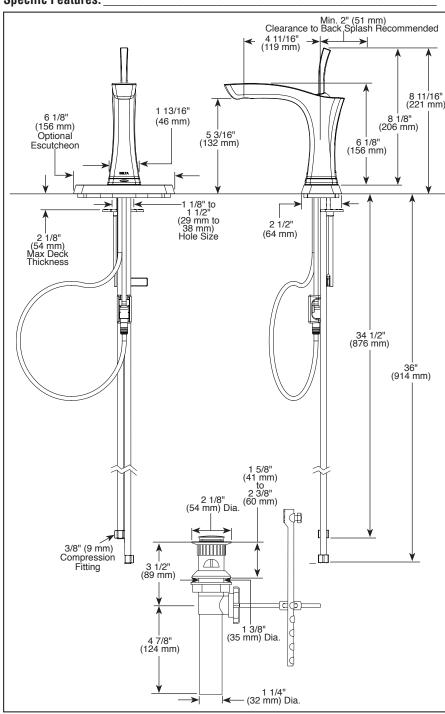

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.



see what Delta can do

# BATHROOM FAUCETS

- Tesla<sup>®</sup> Collection
- Single Handle Deck Mount

## **FEATURES:**

- Touch<sub>2</sub>O® Technology
- DIAMOND Seal Technology®

## **STANDARD SPECIFICATIONS:**

- Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- One or three hole mount (escutcheon optional, included)
- Diamond coated ceramic cartridge
- 3/8" O.D. straight, staggered PEX supply lines
- Handle rotates 22°
- Red/blue indicators markings
- LED indicator light signals on-off, water temperature and when batteries run low
- Uses 6 AA (included) or 6 C (optional) batteries
- Optional 120V AC adapter available (3 prong grounded outlet required)
- Models include polypropylene pop-up
- Drain operates using vertical slide mechanism

#### **WARRANTY**

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



#### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1ASME A112.18.2 / CSA B125.2

Indicates compliance to ICC/ANSI A117.1 - for valve control only

■ EPA WaterSense®

**Delta Faucet Company** 

55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 oolis, IN 46280 © 2020 Delta Faucet Company