


see what Delta can do™

BATHROOM FAUCETS

■ Single Handle Deck Mount

Submitted Model No.: _____

Specific Features: _____

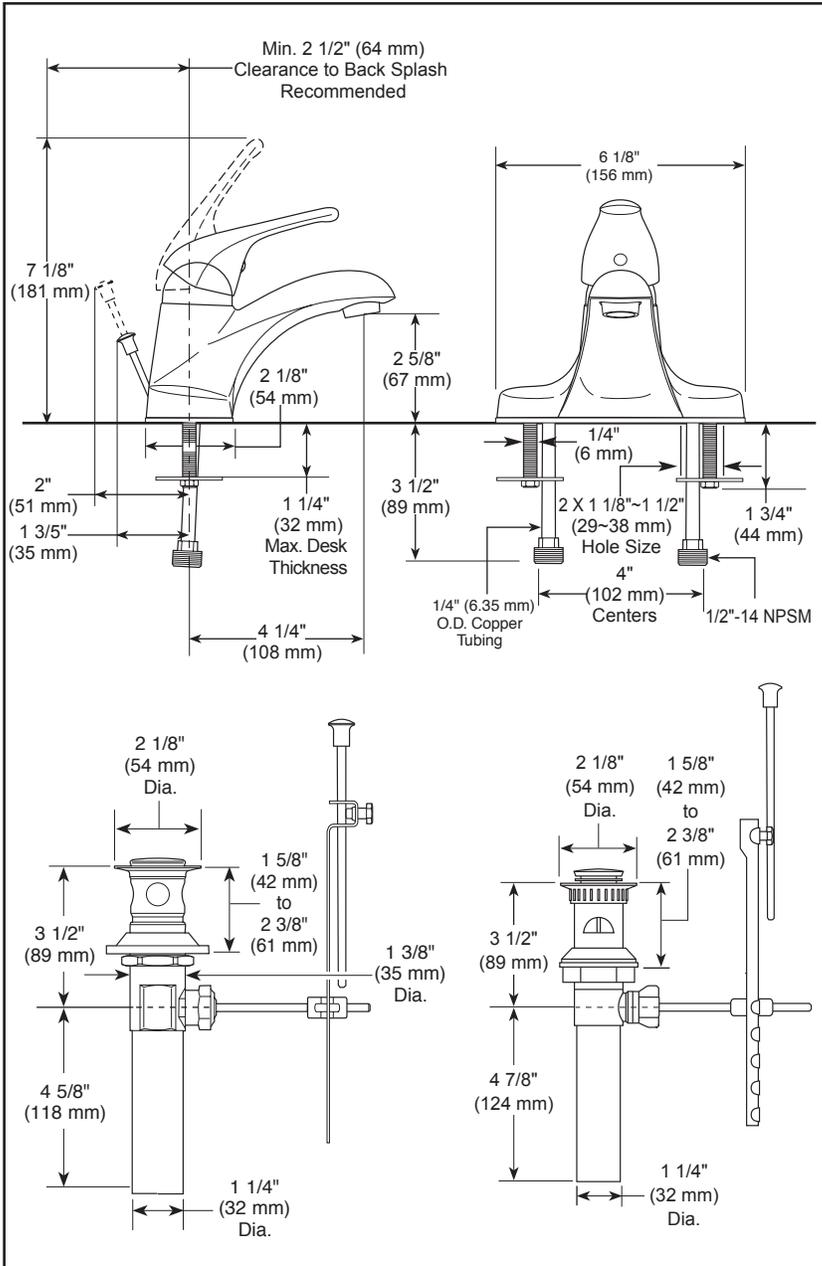

▲ Designate proper finish suffix

STANDARD SPECIFICATIONS:

- Max. flow rate: 1.2 gpm @ 60 psi, 4.54 L/min @ 414 kPa
- Solid brass fabricated body
- Single handle lavatory faucets for exposed mounting on 3 hole sinks with 4" centers
- All operating parts shall be replaceable from the top
- Control mechanism is the rotating stainless steel ball type with replaceable non-metallic seats
- Control handle shall return to neutral position when valve is turned off
- Metal drain with pop-up type fitting with plated flange and stopper
- Models with "PPU" have plastic pop-up type fitting with plated flange and stopper
- Models with "LH" no drain and no lift rod hole

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- ♿ Indicates compliance to ICC / ANSI A117.1 - Valve control only
- EPA WaterSense®

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.