


E24334



Collection: BRIVE

Finish*:

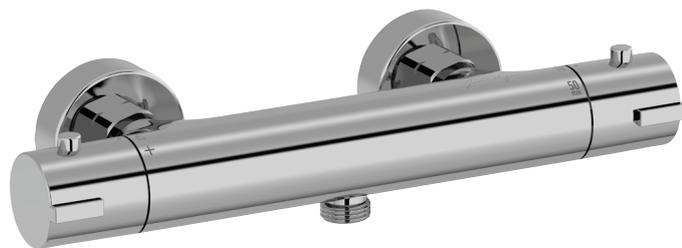

CP - Chrome

Main features:



Features

- DIMENSIONS: 10 x 6 cm
- MATERIAL: 54
- NORMS AND REGULATION: NF : E1 C3 A2 U3 // ACS : 19 ACC LY 719
- FLOW RATE: 12 l/mn
- WATER/ENERGY-SAVING: WATER-SAVING
- INSTALLATION TYPE: WALL-MOUNT
- SAFETY STOP: 38°C
- DIVERTER: Automatic
- FINISH GUARANTEE: 10 years
- WEIGHT: 1.4 kg
- INSTALLATION TYPE: 2 holes
- TYPE: Single-lever
- CONNECTION: With connectors and wall escutcheons
- WASTE : WITHOUT WASTE
- SINGLE-LEVER TAP: THERMOSTATIC
- MAXIMUM TEMPERATURE: 50°
- MECHANISM GUARANTEE: 5 years
- HOSE TYPE: Smooth, anti-twist hose


Consumer benefits

- WATER EFFICIENCY: Stop saves up to 50% in water, limited water flow and optimal performance
- ERGONOMICS: Easy-to-maneuver handles
- HYGIENE: Non-return valves on supplies

Installation benefits

- EASE OF INSTALLATION: Connectors and wall escutcheons

Technical drawing

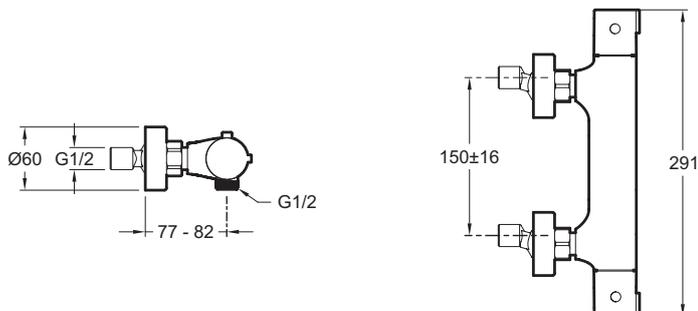

Product Specification: Thermostatic wall-mount shower mixer. E24334. Collection: BRIVE. DIMENSIONS: 10 x 6 cm. WEIGHT: 1.4 kg. MATERIAL: 54. INSTALLATION TYPE: 2 holes. NORMS AND REGULATION: NF : E1 C3 A2 U3 // ACS : 19 ACC LY 719. TYPE: Single-lever. FLOW RATE: 12 l/mn. CONNECTION: With connectors and wall escutcheons. WATER/ENERGY-SAVING: WATER-SAVING. WASTE : WITHOUT WASTE. INSTALLATION TYPE: WALL-MOUNT. SINGLE-LEVER TAP: THERMOSTATIC. SAFETY STOP: 38°C. MAXIMUM TEMPERATURE: 50°. DIVERTER: Automatic. MECHANISM GUARANTEE: 5 years. FINISH GUARANTEE: 10 years. HOSE TYPE: Smooth, anti-twist hose.