

**E75767**



**Collection:** BRIVE

**Finish\*:**



CP - Chrome

**Main features:**



**Features**

- WEIGHT: 1.3 kg
- INSTALLATION TYPE: 2 holes
- TYPE: Single-lever
- SPOUT PROJECTION: 132
- MECHANISM: Ceramic disc cartridge
- WATER/ENERGY-SAVING: WATER-SAVING
- NON-RETURN VALVE: Yes
- MECHANISM GUARANTEE: 5 years
- Anti-scale aerator.
- MATERIAL: 54
- NORMS AND REGULATION: NF : ID/A - ECAU : E3/1 C2 A2 U3 (Ge3) - ACS : 15 ACC LY 472
- FLOW RATE: 21 l/min under 3 bar
- CONNECTION: Without connector
- HOLE CONFIGURATION: 150
- INSTALLATION TYPE: 2 holes
- DIVERTER: Automatic diverter with locking feature
- Flow rate: 21 l/min
- Non-return valve on shower outlet


**Consumer benefits**

- Temperature limiter ring
- Savings: Sensitive flow control.
- Automatic diverter with locking feature, practical in case of low water pressure

**Installation benefits**

- Can connect to existing pillar connectors (G1/2 - G3/4)

**Technical drawing**

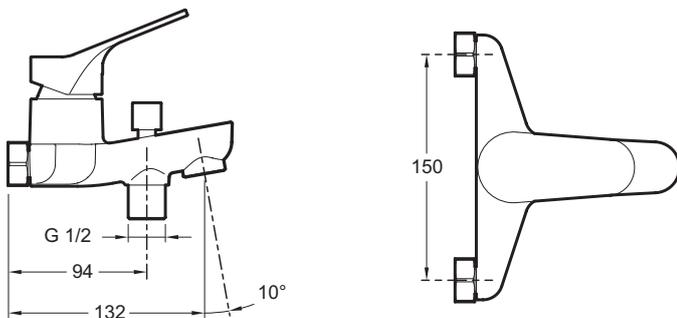

Product Specification: Single-lever bath/shower mixer, without connectors. E75767. Collection: BRIVE. WEIGHT: 1.3 kg. MATERIAL: 54. INSTALLATION TYPE: 2 holes. NORMS AND REGULATION: NF : ID/A - ECAU : E3/1 C2 A2 U3 (Ge3) - ACS : 15 ACC LY 472. TYPE: Single-lever. FLOW RATE: 21 l/min under 3 bar. SPOUT PROJECTION: 132. CONNECTION: Without connector. MECHANISM: Ceramic disc cartridge. HOLE CONFIGURATION: 150. WATER/ENERGY-SAVING: WATER-SAVING. INSTALLATION TYPE: 2 holes. NON-RETURN VALVE: Yes. DIVERTER: Automatic diverter with locking feature. MECHANISM GUARANTEE: 5 years. Flow rate: 21 l/min. Anti-scale aerator. Non-return valve on shower outlet.

\*Due to possible variations in computer and printer calibrations, technical factors and certain finish characteristics, the colors you see may not accurately portray the actual colors and are provided as a guide only.