



BENEITO FAURE®

passion for led light


BORA





Bora suspensión florón empotrar 8,5W

NEW

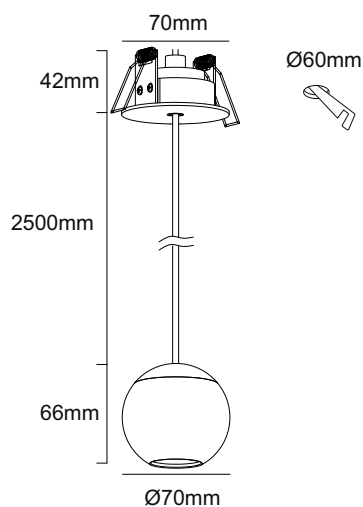

CODE	COLOR	CCT	LUMENS	POWER	VOLTAGE	ANGLE	PF	A	Hz
4613	○ WHITE	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4614	○ WHITE	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60
4615	● BLACK	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4616	● BLACK	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60
4617	● CROME	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4618	● CROME	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60
4619	● ROSE GOLD	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4620	● ROSE GOLD	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60



ALUMINIUM

IP20




RoHS



Bora suspensión florón superficie 8,5W

NEW

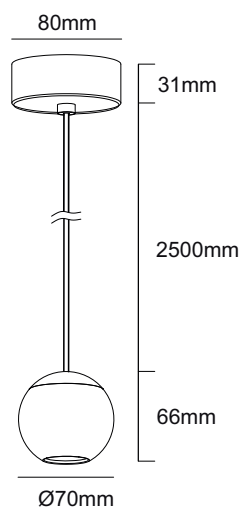

CODE	COLOR	CCT	LUMENS	POWER	VOLTAGE	ANGLE	PF	A	Hz
4605	○ WHITE	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4606	○ WHITE	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60
4607	● BLACK	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4608	● BLACK	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60
4609	● CROME	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4610	● CROME	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60
4611	● ROSE GOLD	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4612	● ROSE GOLD	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60



ALUMINIUM

IP20




RoHS







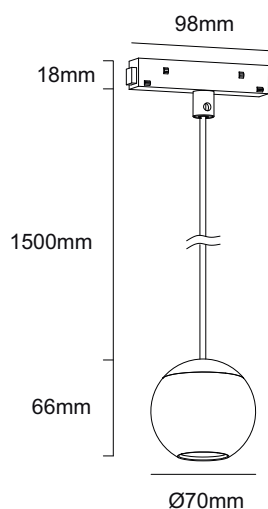

CODE	COLOR	CCT	LUMENS	POWER	VOLTAGE	ANGLE	PF	A	Hz
4573	○ WHITE	2.700 K	610	8,5W	48V	36°	> 0,4	0,06	50/60
4574	○ WHITE	3.000 K	620	8,5W	48V	36°	> 0,4	0,06	50/60
4575	● BLACK	2.700 K	610	8,5W	48V	36°	> 0,4	0,06	50/60
4576	● BLACK	3.000 K	620	8,5W	48V	36°	> 0,4	0,06	50/60
4577	● CROME	2.700 K	610	8,5W	48V	36°	> 0,4	0,06	50/60
4578	● CROME	3.000 K	620	8,5W	48V	36°	> 0,4	0,06	50/60
4579	● ROSE GOLD 2.700 K		610	8,5W	48V	36°	> 0,4	0,06	50/60
4580	● ROSE GOLD 3.000 K		620	8,5W	48V	36°	> 0,4	0,06	50/60



ALUMINIUM

IP20



RoHS








NEW

Bora florón encastrar 8,5W



CODE	COLOR	CCT	LUMENS	POWER	VOLTAGE	ANGLE	PF	A	Hz
4597	○ WHITE	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4598	○ WHITE	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60
4599	● BLACK	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4600	● BLACK	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60
4601	● CROME	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4602	● CROME	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60
4603	● ROSE GOLD	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4604	● ROSE GOLD	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60



ALUMINIUM

IP20

CE



EMC



UGR <15



+40°C
-20°C

RoHS



220-240v



26.000h



>93
CRI



1/12




BENEITO FAURE®



NEW

Bora florón encastrar 4,5W



CODE	COLOR	CCT	LUMENS	POWER	VOLTAGE	ANGLE	PF	A	Hz
4589	○ WHITE	2.700 K	290	4,5W	100-240V	38°	> 0,5	0,04	50/60
4590	○ WHITE	3.000 K	300	4,5W	100-240V	38°	> 0,5	0,04	50/60
4591	● BLACK	2.700 K	290	4,5W	100-240V	38°	> 0,5	0,04	50/60
4592	● BLACK	3.000 K	300	4,5W	100-240V	38°	> 0,5	0,04	50/60
4593	● CROME	2.700 K	290	4,5W	100-240V	38°	> 0,5	0,04	50/60
4594	● CROME	3.000 K	300	4,5W	100-240V	38°	> 0,5	0,04	50/60
4595	● ROSE GOLD	2.700 K	290	4,5W	100-240V	38°	> 0,5	0,04	50/60
4596	● ROSE GOLD	3.000 K	300	4,5W	100-240V	38°	> 0,5	0,04	50/60



ALUMINIUM

IP20

CE



EMC



+40°C
-20°C


RoHS



BENEITO FAURE®

Bora magnet track 4,5W

NEW



CODE	COLOR	CCT	LUMENS	POWER	VOLTAGE	ANGLE	PF	A	Hz
4621	○ WHITE	2.700 K	315	4,5W	48V	38°	> 0,4	0,4	50/60
4622	○ WHITE	3.000 K	325	4,5W	48V	38°	> 0,4	0,4	50/60
4623	● BLACK	2.700 K	315	4,5W	48V	38°	> 0,4	0,4	50/60
4624	● BLACK	3.000 K	325	4,5W	48V	38°	> 0,4	0,4	50/60
4625	● CROME	2.700 K	315	4,5W	48V	38°	> 0,4	0,4	50/60
4626	● CROME	3.000 K	325	4,5W	48V	38°	> 0,4	0,4	50/60
4627	● ROSE GOLD	2.700 K	315	4,5W	48V	38°	> 0,4	0,4	50/60
4628	● ROSE GOLD	3.000 K	325	4,5W	48V	38°	> 0,4	0,4	50/60



ALUMINIUM

IP20



UGR <10




+40°C
-20°C

RoHS



NEW

Bora florón superficie 4,5W



CODE	COLOR	CCT	LUMENS	POWER	VOLTAGE	ANGLE	PF	A	Hz
4621	○ WHITE	2.700 K	290	4,5W	100-240V	38°	> 0,5	0,04	50/60
4622	○ WHITE	3.000 K	300	4,5W	100-240V	38°	> 0,5	0,04	50/60
4623	● BLACK	2.700 K	290	4,5W	100-240V	38°	> 0,5	0,04	50/60
4624	● BLACK	3.000 K	300	4,5W	100-240V	38°	> 0,5	0,04	50/60
4625	● CROME	2.700 K	290	4,5W	100-240V	38°	> 0,5	0,04	50/60
4626	● CROME	3.000 K	300	4,5W	100-240V	38°	> 0,5	0,04	50/60
4627	● ROSE GOLD	2.700 K	290	4,5W	100-240V	38°	> 0,5	0,04	50/60
4628	● ROSE GOLD	3.000 K	300	4,5W	100-240V	38°	> 0,5	0,04	50/60



ALUMINIUM

IP20

CE



EMC



UGR <10



+40°C
-20°C

RoHS

100-240v


26.000h

>93
CRI

1/18

Bora florón superficie 8,5W

NEW

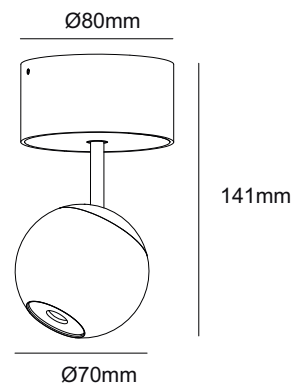

CODE	COLOR	CCT	LUMENS	POWER	VOLTAGE	ANGLE	PF	A	Hz
4629	○ WHITE	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4630	○ WHITE	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60
4631	● BLACK	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4632	● BLACK	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60
4633	● CROME	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4634	● CROME	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60
4635	● ROSE GOLD	2.700 K	530	8,5W	220-240V	36°	> 0,6	0,06	50/60
4636	● ROSE GOLD	3.000 K	540	8,5W	220-240V	36°	> 0,6	0,06	50/60



ALUMINIUM

IP20

CE



EMC



+40°C
-20°C

RoHS



BORA SUSPENSIÓN
SUPERFICIE 8,5W

BORA SUSPENSIÓN
EMPOTRADO 8,5W

BORA

BORA EMPOTRADO 4,5W


BORA EMPOTRADO 8,5W

BORA S



BORA MAGNET TRACK 4,5W

BORA MAGNET TRACK SUSPENSIÓN 8,5W

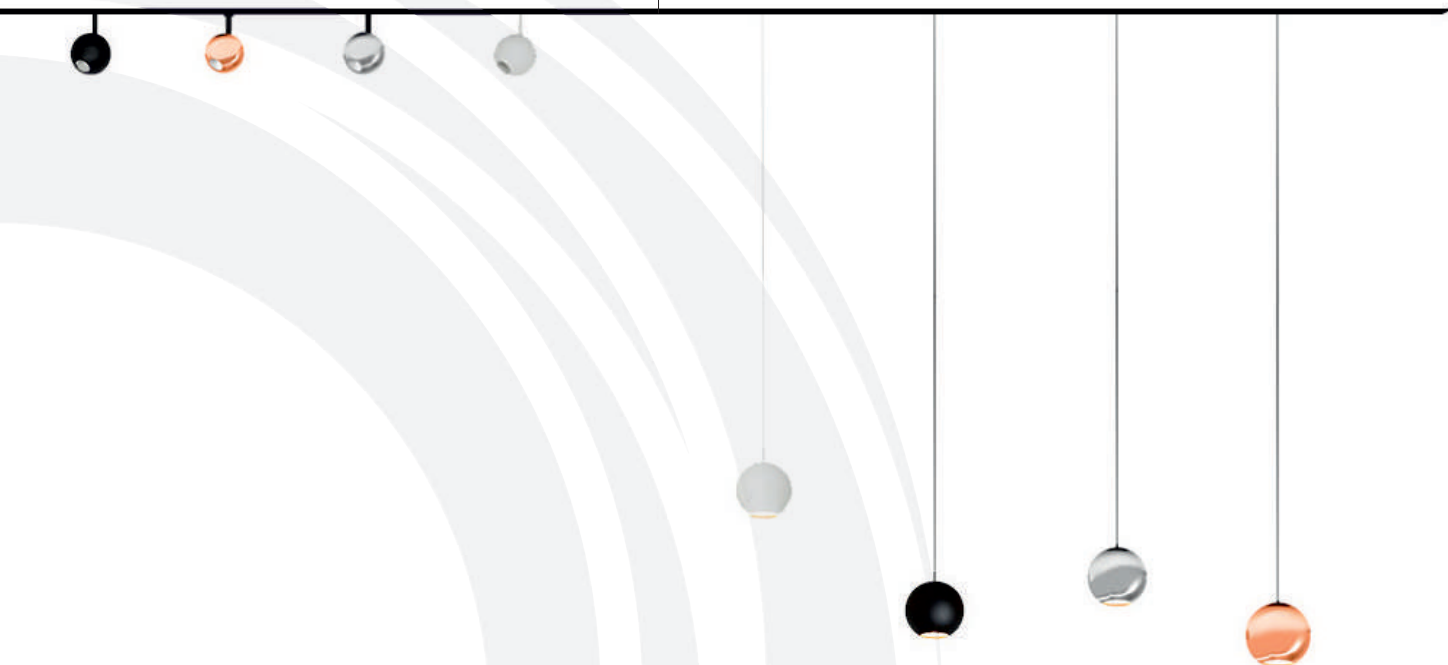

SUPERFICIE 4,5W

BORA SUPERFICIE 8,5W



beneito-faure.com