



SIEMENS

## Built-in Appliances 2019 Collection

Discover appliances that are made to complement one another and offer stand out eye-catching design. Explore exciting possibilities and innovative features with the Siemens built-in range.

The future moving in.

Siemens Home Appliances

# Introducing coordinated and intelligently designed appliances by Siemens.



Introducing coordinated and intelligently designed appliances by Siemens. Offering you the perfect balance between modern design and innovative technology our range has different collections including iQ700; products with eye-catching design, cutting-edge technology and big, bright and more intuitive displays. Our iQ500 range brings the latest innovations and exclusive designs allowing you to experience first-class appliances in your home. iQ300 and iQ100 offer more affordable options with the same level of design and style.

Discover the entire built-in range – for even more flexibility and time-saving solutions which help support increasingly busy lifestyles. Siemens appliances include ovens that save time by speeding up the cooking process with varioSpeed, dishwashers that feature the world's only Zeolith® drying system; a technological innovation that sets new standards for performance and energy efficiency. In addition our range features fridges with hyperFresh food preservation to help keep food fresh for longer and outstanding freezers that never have to be defrosted. Not to mention high performance built-in washing machines. All working together to create a spectacular built-in kitchen and utility space in your home.

Stunning design and high quality materials come as standard with all Siemens appliances.



Siemens Home Appliances is part of BSH, winner of the 2018 Domestic and General Total Excellence and Quality Award. This award is based on surveys sent to customers of most of the major home appliance manufacturers and confirms our commitment to offering Siemens customers the very best customer service.



## Warranties.

Siemens offer a 2 Year Warranty across the majority of our built-in range for added peace of mind. This warranty covers manufacturing and material faults. To register your warranty please refer to the information on page 179. aCool appliances within the studioLine cooling range and American fridge freezers are the only appliances we currently offer with a 5 Year Warranty.




For the machines featured in this brochure, we are also able to offer longer warranties on certain parts. This includes a 10 year Anti-Rust warranty on all dishwashers, a 10 year Compressor Drive warranty on selected cooling appliances, a 10 year iQdrive® warranty on selected washing machines and lifetime AquaStop warranty on selected laundry and dishwasher appliances.

For further details please refer to page 179 or visit our Siemens Home UK website.



# Welcome home.

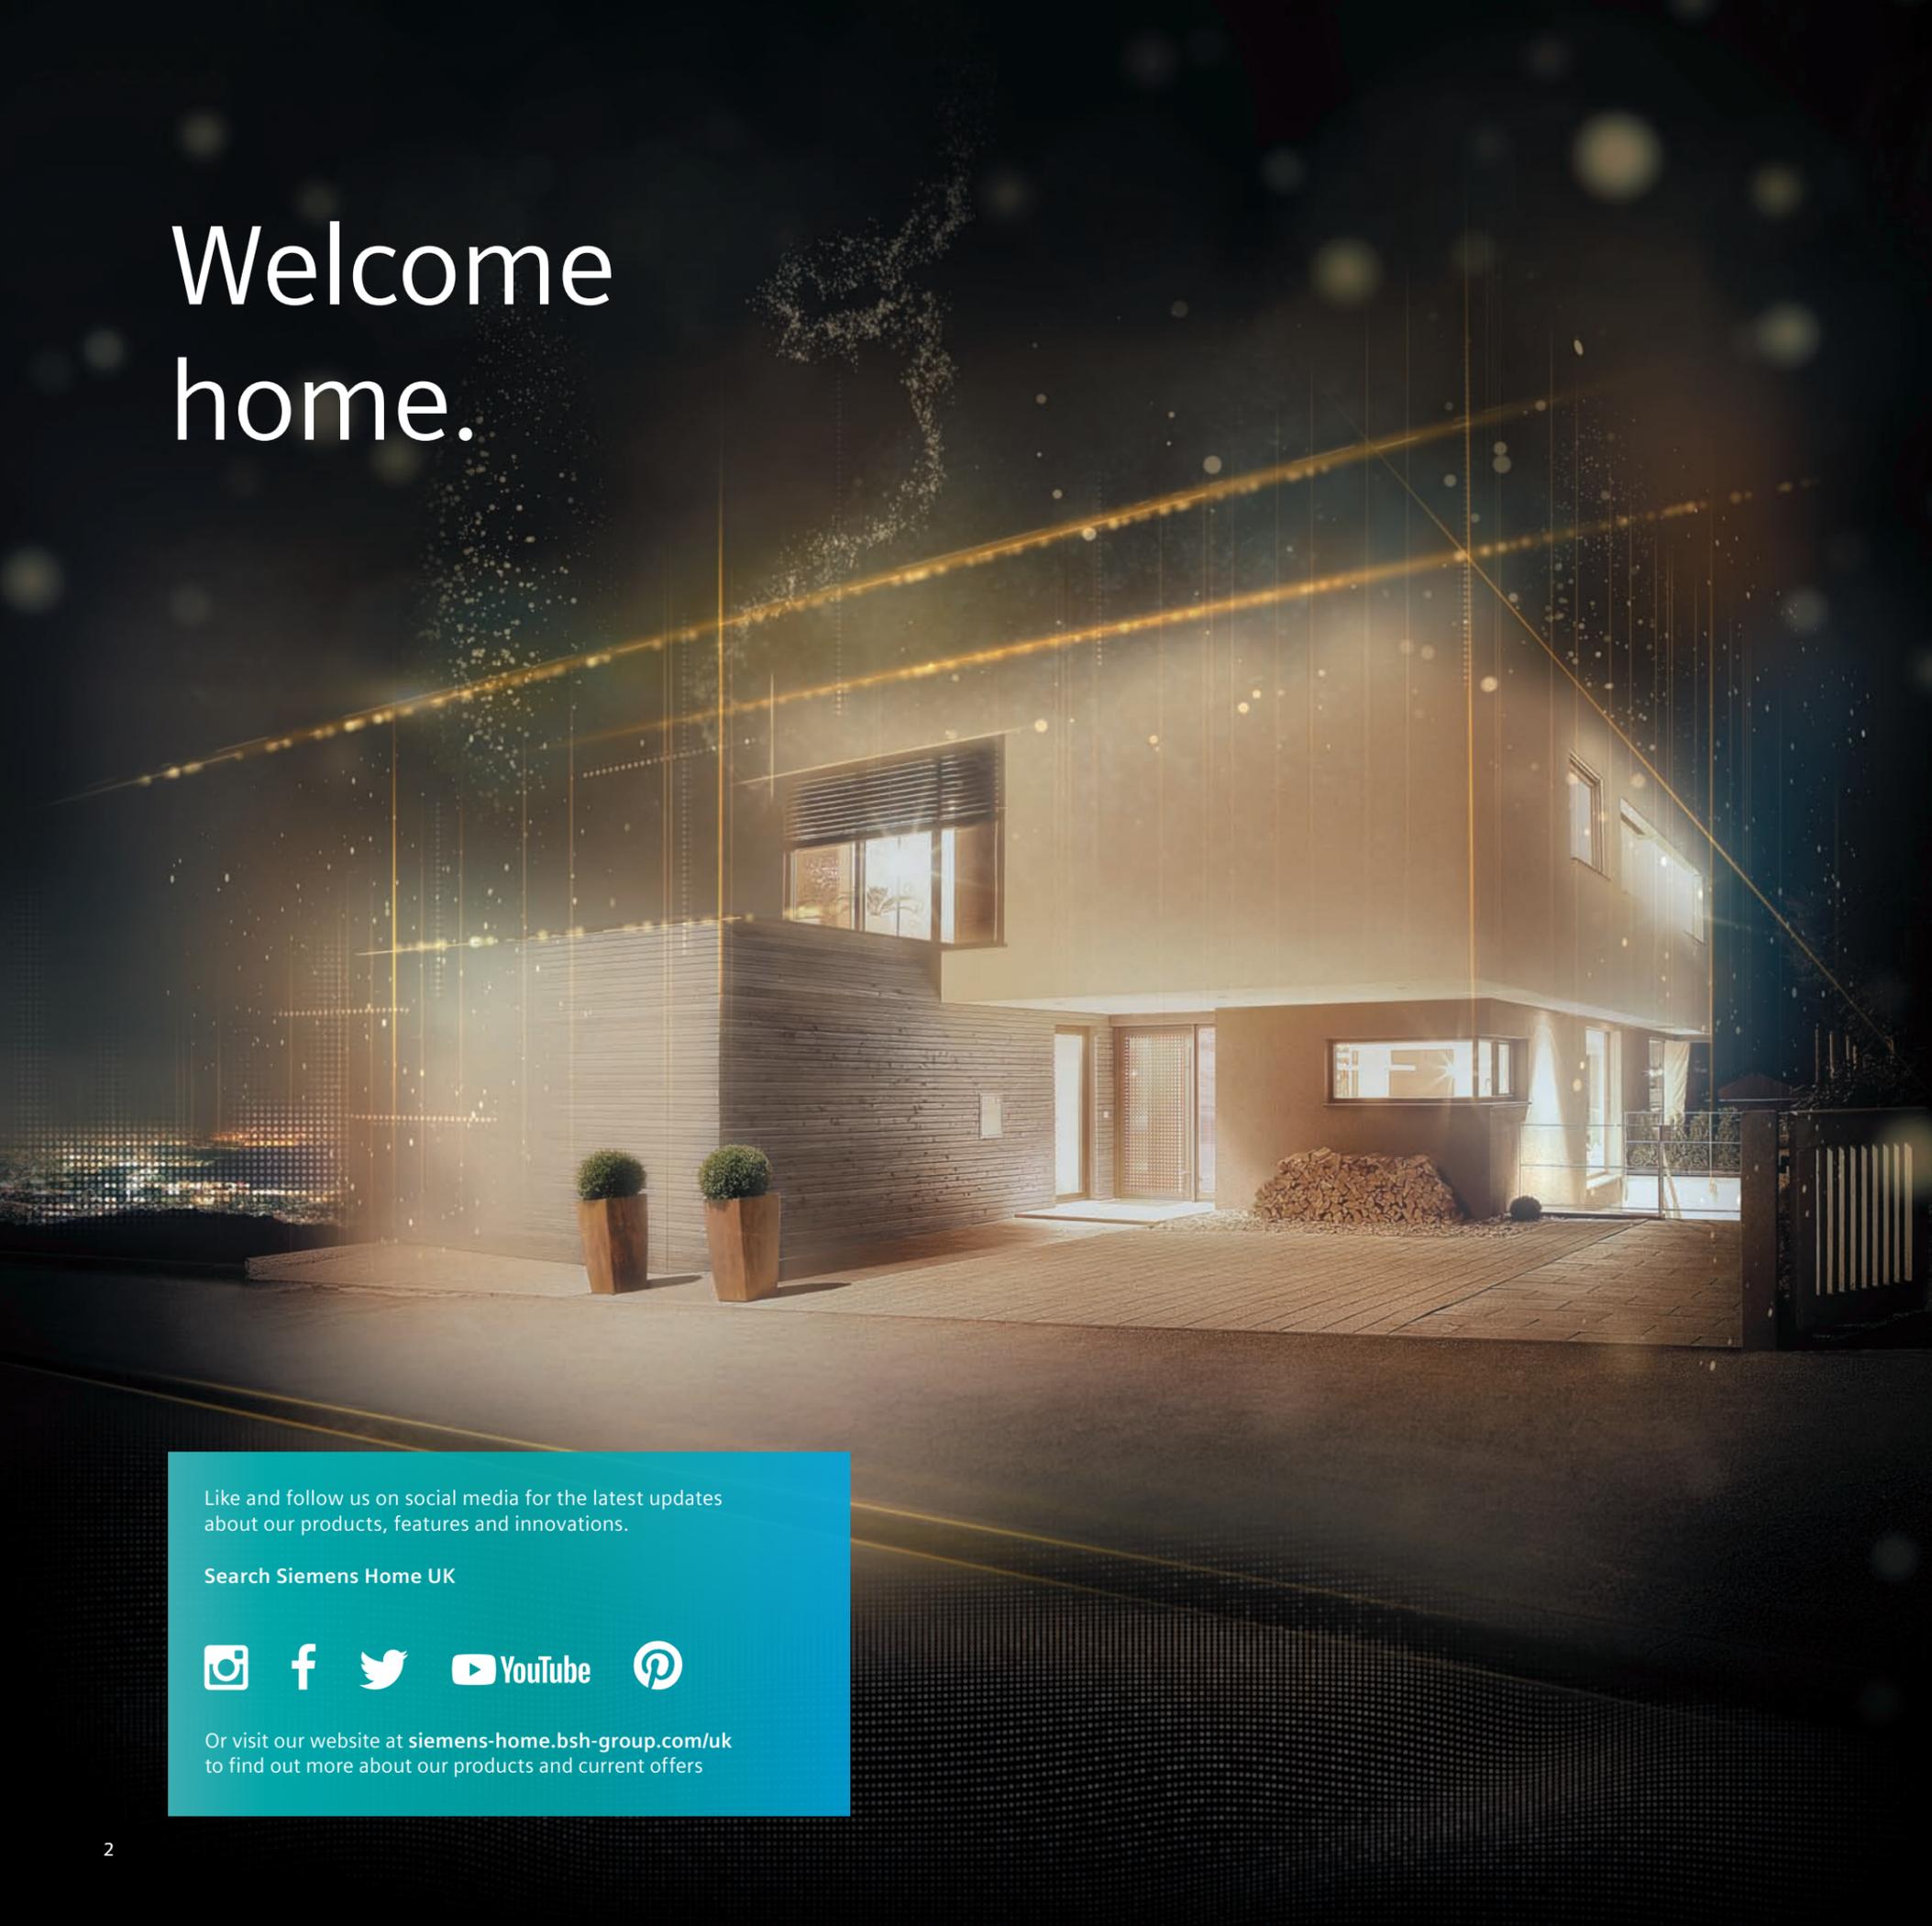

## Cooking 8-51

|   |       |
|---|-------|
| Coffee centres .....                                    | 22-25 |
| Single ovens with TFT touchDisplay Plus .....           | 30-31 |
| Single ovens with TFT touchDisplay .....                | 32-33 |
| Single ovens with TFT Display .....                     | 34-35 |
| Single ovens with lightControl illuminated dials .....  | 36-37 |
| Double ovens with lightControl illuminated dials .....  | 38-39 |
| Compact ovens with TFT touchDisplay Plus .....          | 40-41 |
| Compact ovens with TFT touchDisplay .....               | 42-43 |
| Compact ovens with TFT Display .....                    | 44-45 |
| Compact ovens with lightControl illuminated dials ..... | 46-47 |
| Microwaves .....  | 48-49 |
| Warming drawers .....                                   | 50    |
| Accessories .....                                       | 51    |

## Hobs 52-89

|                              |       |
|------------------------------|-------|
| freeInduction hob .....      | 71    |
| inductionAir hobs .....      | 72-73 |
| flexInduction hobs .....     | 74-77 |
| Induction hobs .....         | 78-81 |
| quickLite ceramic hobs ..... | 82-83 |
| Gas hobs .....               | 84-87 |
| Domino hobs .....            | 88-89 |

## Hoods 90-123

|                           |         |
|---------------------------|---------|
| Ceiling hoods .....       | 104-105 |
| downDraft hoods .....     | 106-107 |
| Island hoods .....        | 108-109 |
| Decorative hoods .....    | 110-111 |
| Glass chimney hoods ..... | 112-113 |
| Box chimney hoods .....   | 114-115 |
| Pyramid hoods .....       | 116-117 |
| Telescopic hoods .....    | 118-119 |
| Canopy hoods .....        | 120-121 |
| Integrated hoods .....    | 122-123 |

## Cooling 124-153

|  |         |
|--|---------|
| aCool fridges .....                    | 140-141 |
| aCool freezers and wine coolers .....  | 142-143 |
| American fridge freezers .....         | 144-145 |
| noFrost bottom fridge freezers .....   | 146-147 |
| lowFrost bottom fridge freezers .....  | 148-149 |
| Single door fridges and freezers ..... | 150-153 |

## Dishwashers 154-169

|                        |         |
|------------------------|---------|
| Fully integrated ..... | 166-168 |
| Slimline .....         | 169     |

## Home laundry 170-177

|                        |     |
|------------------------|-----|
| Washing machines ..... | 176 |
| Washer dryers .....    | 177 |

## Services 178-179

|   |     |
|---|-----|
| Contact us .....                            | 179 |
| Register your manufacturer's warranty ..... | 179 |

Like and follow us on social media for the latest updates about our products, features and innovations.

Search Siemens Home UK



Or visit our website at [siemens-home.bsh-group.com/uk](https://siemens-home.bsh-group.com/uk) to find out more about our products and current offers

# Every connection lets your world grow.

To learn more about this technology visit [siemens-home.bsh-group.com/uk](https://siemens-home.bsh-group.com/uk)

## Take the next step into the future: Discover how new connections redefine your daily life with Siemens and Home Connect.

Wi-Fi enabled Home Appliances can already be operated through the Home Connect App, and now this technology connects your appliances with services of different partners – turning your house into a connected home.

This connectivity creates new possibilities and opportunities in your living space; such as changing the colour of your cooker hood to change the ambience of the kitchen, or setting up your oven using Amazon Alexa voice control, technology which both enriches and offers you more time and flexibility.



### Ovens and Coffee Centre

- **recipeWorld:** Discover a large and delicious variety of Siemens approved recipes. Select your favourite via the app and send the settings directly to the oven, straight from your mobile, tablet or smart device.
- **coffeeWorld:** Explore a wide range of additional coffee specialties from all around the world. Select your choice via the app and send the drink instruction straight to your coffee machine.
- **coffeePlaylist:** Impress your guests by asking them to submit their coffee preferences via the app. Transfer the beverage list remotely to the coffee machine and the drinks will be prepared one after the other.
- Operate the oven and coffee machine intuitively from wherever you are, for instance preheat your oven while you are on your way home or rinse your coffee machine from your bed when you wake up in the morning, ready for the day ahead.

### Hobs and Hoods

- **emotionLight Pro:** Change the ambience of the kitchen by projecting a different colour of light from your hood. Access up to 256 colours via the Home Connect App, perfect for parties.
- **Cooking assistant:** Use the assist tab on the Home Connect App when using the hob to help you find or select cooking methods. Send the settings directly to your hob for easier and quicker evening meals.
- With both hobs and hoods you can conveniently monitor your appliances' cooking status, turn appliances on or off or change the cooking settings via your Home Connect App, from wherever you are.
- Push notifications are a helpful guide notifying you when your appliance needs maintenance attention, such as letting you know when the filters need replacing.

### Washing Machines and Tumble Dryers

- **easyStart:** select from 5 easy options via the Home Connect App to identify the best wash or drying setting. Send this cycle type direct from your app to the machine.
- Operate laundry appliances from wherever you are and receive push notifications when the cycle is finished and, for our i-Dos model, whenever the fill status of detergent or fabric softener is getting low.

### Fridge Freezers

- **Camera in the fridge:** Plan ahead by checking the contents of your fridge from wherever you are. Our fridge freezer model KG36NH132 has two cameras in the fridge that regularly send updated internal fridge photographs to the Home Connect App allowing you to peer inside and plan ahead, even if you are at work or on your commute.
- Manage your appliance remotely and intuitively select and activate the ideal setting for your refrigerator. Whether you are returning from a food shop or boarding a flight, adjust your fridge temperature or setting directly using the app. Receive helpful push notifications directly to your app, such as when you leave the door open.

### Dishwashers

- **easyStart:** simply select the kind of dishes and your cleaning preference on the app and Home Connect will suggest the correct cycle for your load, making chores stress free and straightforward.
- Identify the most efficient wash for your load and access the whole programme offering through the app. With descriptions for each setting, use the app to help you identify the right wash for your cycle and send the load instructions straight to your machine.
- Operate the dishwasher from wherever you are to fit around your lifestyle. Check the wash time, receive push notifications to your mobile for machine maintenance or even start the machine remotely when out of home.



Try demo

If you haven't yet registered appliances on the app you can still try out the demo function to get a better understanding of the features available to you.

To experience the demo mode download the free Home Connect app and then press and hold 'Try demo' on the app's home screen.



Image represents our Home Connect campaign. For more details about Siemens freestanding appliances please refer to our website: [siemens-home.bsh-group.com/uk](https://siemens-home.bsh-group.com/uk)

## Our world has turned into an ever-growing network of partner services, to help you turn your house into a fully connected home.

### Raise your voice and reduce your efforts with Amazon Alexa.

Food and ambience are equally important when it comes to pleasing your guests, but how can you be in two places at the same time – preparing dishes in the kitchen, whilst entertaining in the living room? Now with Home Connect and the right partner, it just became possible. Amazon Alexa enables you to voice-control various home appliances. With just one command, you can start the laundry program, preheat the oven, check the dishwashing progress or ask for your favourite coffee. A world of exciting possibilities awaits – just ask Alexa.

### There are more important things to think of than dishwasher tablets.

#### Make life easier with Amazon Dash Replenishment.

Replenishing consumables is a small thing, but it can also become a big thing when you discover that you've just run out of essentials like dishwasher tablets. Discover the seamless way of managing dishwashing cycles by getting tablets automatically delivered to you, with the Home Connect App and your selected online shopping partners. By monitoring the number of dishwashing cycles, the system intelligently reorders dishwasher detergent for you, just in time, and with total convenience.

### Define your unique with IFTTT

With IFTTT (If This Then That), you can integrate your Home Connect appliances seamlessly into your life and allow them to communicate with one another, allowing you to create your own automated applets which are perfectly tailored to your needs. Design bespoke triggers, for example, connect your coffee machine to your smart watch and your sleeping rhythm will then be recorded and directly sent to your coffee machine, which can then prepare you the most appropriate morning coffee - a double espresso after a rough night, or a latte after a good rest. There are so many possibilities to be creative; the smart lamp in your living room blinks when the laundry is done, the hood emotionLight lights up when your dinner is ready... Be inspired by checking the IFTTT partner app to learn about the latest "triggers" available.

Models shown above: **SN678D06TG** fully integrated dishwasher, **CT636LE56** coffee centre, **BI630CNS1B** warming drawer, **HN678GES6B** single oven, **LC91KWW60B** angled hood, **WM4UH640GB** freestanding avantgarde washing machine, **WT7XH940GB** freestanding avantgarde tumble dryer and **KG36NA145** freestanding fridge freezer.



## Exclusive to studioLine partner showrooms:

We work closely with selected studioLine partners to both present and demonstrate working studioLine models in store. See this exclusive range in beautifully designed kitchen showrooms and talk to knowledgeable designers, trained to explain all the features and benefits to you. There are studioLine showrooms across the country, to find one near you visit our Dealer locator, via our Siemens Home UK website: [siemens-home.bsh-group.com/uk](http://siemens-home.bsh-group.com/uk)

Models shown: **HN878G4B6B** single oven, **CN878G4B6B** compact oven and **B1830CNB1B** warming drawer

## Experience the elite studioLine.

For those who want to set themselves apart from every standard.

The studioLine kitchen: enjoy elegance and exclusivity with appliances that all line up perfectly to create a guaranteed design statement. Enjoy superior design and cutting-edge functionality in your kitchen. The classic and iconic studioLine appliances with their black glass and blackSteel fascia will compliment any high end kitchen design. The studioLine models all elegantly feature the studioLine signature just underneath the Siemens logo.

StudioLine offers a complete kitchen solution with innovative technology such as cooking with sous-vide using the vacuum drawer, and cooking without zones on the freeinduction hob.

### Explore the full range

Cooking – pages 26-29

Hobs – pages 68-70

Hoods – pages 100-103

Cooling – pages 134-139

Dishwashers – pages 164-165

studioLine

Visit our website [siemens-home.bsh.com/uk](http://siemens-home.bsh.com/uk) for more information and to find a studioLine retailer near you.

# The perfect line up. Coordinated and intuitive cooking experiences.



Models shown: HN878G4B6B single oven, CT868LEB6 coffee machine, BI830CNB1B warming drawer, HB878GBB6B single oven

From ovens to warming drawers and coffee centres Siemens clean lines and matching appliances allow for perfect design coordination.

## Ovens

With stylish design Siemens built-in ovens are designed to impress, ensuring a sleek finish when coordinated with other Siemens appliances. Their ability to be installed independently allows full flexibility to fit appliances under work surfaces, in tall units or in a bank with other appliances. These multiple combinations mean that you have full freedom with your kitchen design, not to mention state-of-the-art technology and features which save you time when cooking.

## Compacts

With the variety of appliances in our compact built-in range, Siemens provides a combination of options to suit your preferences, while delivering complete visual perfection. Siemens 45cm and 36cm high compact appliances allow for a full array of cooking experiences. Depending on the range and model, compact ovens are available with steam or integrated microwave, offering space-saving design without compromising on style or utility.

Siemens oven and compacts warranties:



### 2 Year Warranty

A Two Year Warranty is available on all Siemens ovens and compact appliances listed in this brochure to protect against manufacturing and material faults during this warranty period.

To find out more about your warranty and for registration please refer to page 179.



### Energy efficient ovens\*

Most Siemens single ovens achieve a European Class A+ rating for energy efficiency. Siemens double ovens have a rating of between A and B. For better efficiency, certain models feature the hotairGentle and conventional heat Gentle functions.

\*For individual product energy efficiency ratings please check the product technical specifications.

## Key features within the iQ700 and iQ500 range



### varioSpeed

Twice as fast in combination: by adding the integrated microwave function to a conventional cooking option, you can speed up the preparation of your dishes without compromising on the quality.



### fast preheat

No more tedious waiting for the oven to get to the right temperature!

When you need it, just switch on fast preheating. By activating multiple heating elements simultaneously, Siemens ovens with fast preheating get to the desired temperature very quickly.



### coolStart

Cooking certain frozen foods in the oven is now even faster – thanks to the innovative coolStart function. Without the need to wait for the oven to reach the set temperature, you can successfully cook frozen foods without preheating, while still using the recommended cooking time.



## Sleek in design, intuitive in operation.



### Electronic control

Depending on the function selected, the oven will suggest a suitable temperature which can be manually adjusted. The selected temperature is displayed digitally and a heating up indicator shows the progress towards the set temperature; the same indicator shows residual heat once the oven is turned off. Get quick access to performance features like cookControl and cookControl plus whilst being safe in the knowledge that if left unadjusted for a period of time, the oven will switch off automatically.



### Sabbath setting

All models with electronic control have Sabbath function. This setting is specifically designed to assist with certain religious requirements. It allows the oven to be set for a maximum of 73 hours at 140°C to keep pre-prepared food warm. The oven door can be opened and closed without the display changing or causing changes to the heating and cooling fans.



### Everything put in a good light.

Depending on the model, there are different kinds of illumination inside the oven. Whether it's the standard Halogen light, LEDs or the most advanced Multilevel LED strip, they all provide a brilliant view of your dishes without having to open the oven door.

## Thanks to activeClean® and ecoClean® by Siemens, cleaning your oven becomes simple and effortless.



### Ovens with activeClean®

Enjoy preparing food without worrying about the consequences. Baked on food and grease can be removed at the push of a button without any need for chemical treatments. Hassle-free, the oven cleans itself thoroughly with activeClean®. It does so by heating up to a very high temperature – turning all residues into ash, which can easily be wiped away. This process is called pyrolytic and is the most convenient and efficient way to clean the whole interior of your oven. activeClean® makes it possible to forget about the chore of cleaning your oven and gives you back your time to spend on the things you love.

For iQ700, the telescopic rails and full width enameled pan are specially designed to be used with activeClean® so you don't need to remove them at all. Only the wire shelf needs to be removed.



### Ovens with ecoClean®

A special coating applied directly to the inside of the oven (please check specification of individual models), ecoClean® makes cleaning the oven easy. The coated area cleans itself while the oven is on and models with back, roof and side coating benefit from a special cleaning programme.



### Cleaning and de-scaling

Finished with a durable enameled interior, most Siemens compact45 combination ovens with steam feature dedicated cleaning and de-scaling programmes.



### Drying programme

Saving the effort of wiping down the steam oven after use, the drying programme removes left over humidity inside the cavity of the oven by heating up for approximately 10 minutes.



activeClean® – ovens that clean themselves

# Uncompromising design and technology: iQ700.

Introducing features unique to the Siemens iQ700 ovens and compact appliances range.

## Display options available for iQ700 Ovens and Compacts

The iQ700 range has three differing fascia designs each featuring TFT displays with products designed to complement each other and coordinate effortlessly in your kitchen. Thanks to the simple menu structure optimised for convenient and easy-to-use touch navigation, it's even easier to select the perfect settings. Designed to serve one purpose: giving you full control.



### TFT touchDisplay Plus

The TFT touchDisplay Plus offers more than just control of your oven. It gives tips and information on each programme, full colour graphics and images, it can even suggest the correct way to cook your dishes with cookControl Plus. Clear to read from any angle, it's advanced yet easy-to-use technology for effortless cooking.



### TFT touchDisplay

The slightly smaller TFT touchDisplay offers all the functionality of a touchscreen display with crisp text and images.



### TFT Display

The TFT Display can be operated with touchControl buttons either side of the screen, yet still has clear programme information.

## iQ700 appliance display type compatibility

|                |                         | iQ700 SINGLE OVENS                     |  |  |                          |
|----------------|-------------------------|--|--|--|--------------------------|
|                |                         | HN878G4B6B<br>HB878GBB6B<br>HS858GX6B6 | HM678GES6B<br>HM678G456B<br>HR678GES6B<br>HB678GBS6B<br>HS658GES6B | HM676G056B<br>HR676GBS6B<br>HB676GBS6B<br>HM656GNS6B<br>HB656GBS6B | HB672G851B<br>HB632G851B |
| iQ700 COMPACTS | CS858GRB7B              | TFT touchDisplay Plus                  | ■  |  |                          |
|                | CS656GBS7B              | TFT touchDisplay                       |  | ■  |                          |
|                | CD634GAS0B <sup>1</sup> | TFT Display                            |  |  | ■                        |
|                | CD634GBS1B <sup>1</sup> | TFT Display                            |  |  | ■                        |
|                | CN878G4B6B              | TFT touchDisplay Plus                  | ■  |  |                          |
|                | CM878G4B6B              | TFT touchDisplay Plus                  | ■  |  |                          |
|                | CM678G456B              | TFT touchDisplay Plus                  |  | ■  |                          |
|                | CM676GBS6B              | TFT touchDisplay                       |  | ■  |                          |
|                | CM656GBS6B              | TFT touchDisplay                       |  | ■  |                          |
|                | CM633GBS1B              | TFT Display                            |  |  | ■                        |
|                | CT836LEB6               | TFT touchDisplay                       | ■ <sup>2</sup>   |  |                          |
|                | CT636LE56               | TFT touchDisplay                       |  | ■ <sup>2</sup>   | ■ <sup>2</sup>           |
|                | CF634AGS1B              | TFT Display                            |  |  | ■                        |
|                | BE634LGS1B              | TFT Display                            |  |  | ■                        |
|                | BF634LGS1B              | TFT Display                            |  |  | ■                        |
|                | BV830ENB1B              |  | ■  |  |                          |
|                | BI830CNB1B              |  | ■  |  |                          |
|                | BI630DNS1B              |  |  | ■  | ■                        |
|                | BI630CNS1B              |  |  | ■  | ■                        |

<sup>1</sup> CD634GAS0B replaces CD634BS1B Autumn 2019 <sup>2</sup> Design compatible display

## iQ700 ovens and compacts are designed to complement one another.

Whether you are looking for a single oven with an easy clean solution such as activeClean, an oven with steam function or you may be considering an additional compact model with integral microwave to act as a second oven, Siemens has options for every need.

Steam and added steam cooking has increased in popularity in the past few years. Not only does this offer a more healthy cooking option, steam also retains vitamins and nutrients as well as maintaining the visual appeal of many foods.

The Siemens compact steamer and steam combination ovens provide the benefit of steam together with perfect design coordination.

If coffee is your passion, then why not opt for the Siemens coffee centre – designed to coordinate with the iQ700 range, this versatile machine will provide a variety of specialist coffees at the touch of a button.

The Siemens iQ700 range also includes warming drawers. Primarily designed to pre-heat crockery and keep cooked food warm, these drawers can also slow cook, prove dough and defrost. Available in 14cm or 29cm high options, they combine perfectly with single ovens and 45cm compact models in column or side by side in block installations. For optimum design coordination, choose iQ700 models with matching TFT displays.



Models shown above: **CM678G4S6B** compact steam combination oven with integral microwave, **BI630CNS1B** warming and accessory drawer and **HM678G456B** single multi-function oven



Models shown: **CM678G4S6B** compact steam combination oven with integral microwave, **BI630CNS1B** warming and accessory drawer and **HM678G456B** single multi-function oven



## Enhanced cooking experiences with Home Connect.

### Home Connect

Control your oven at the touch of an app: the Home Connect app gives you the ability to control your oven away from home remotely, for instance you can now preheat the oven on your way home. You can also control the temperature of your oven, change the cook setting, change the duration of the cooking time and even set up an oven cleaning mode from the comfort of the app.

### recipeWorld

Explore an ever growing range of Siemens style recipes available on the app. Send cooking instructions for those recipes directly from the app to the appliance. The appliance will adjust the cooking time, speed and intensity based on the recipe selected.

### Use voice control

Pair Amazon Alexa to your appliance and control it just by using your voice. For instance ask Alexa to change the temperature setting of the oven, or find out how much cooking time is left.

### Personalise your home

With our partner app IFTTT create applets that can enhance your lifestyle. You can now use Home Connect alongside other smart home technologies that are also linked with the IFTTT app, such as lighting or music systems to create a truly connected home. For instance set up an applet to ask your lights to change colour when your dinner is ready or ask your music system to play your favourite song when your oven starts cooking - adding extra excitement and entertainment to the cooking process.

Discover more about Home Connect by visiting [siemens-home.bsh-group.com/uk](https://siemens-home.bsh-group.com/uk)

## More to explore. Achieve the best results.



### Easier than ever before: roastingSensor Plus

Thanks to three measuring points, the innovative roasting thermometer is able to precisely and reliably measure the core temperature of your dishes. This allows you to use it with a wider range of foods. Ideal for meat, poultry and fish, it can even be combined with the integrated microwave and the pulseSteam function. Without the need to keep checking, the roastingSensor Plus gives you the freedom to get on with the rest of your cooking. Within the iQ500 range there is the roastingSensor; a temperature probe with one measuring point, so for leaner cuts of meat you can roast without worry.



### bakingSensor Plus

An oven that can detect when the baking process is complete: with bakingSensor Plus, all that is left for you to do when baking is to prepare the pastry or mix and select the required dish. Innovative sensor technology fitted inside selected iQ700 ovens can automatically control the baking process for consistently delicious baking. The bakingSensor constantly measures the moisture levels in the oven interior and is therefore able to tell you when the dish is fully cooked and ready.

## The ideal kitchen helper.



### cookControl Plus

Make perfect preparation easier than ever before. Select your chosen dish and enter the weight. The oven will then provide individual setting recommendations for perfect preparation of your dish ensuring the best results for a wide range of dishes, every time.

This automatic cooking offers up to 70 programmes to ensure meat and fish are cooked to perfection. If you're using a roastingSensor or bakingSensor, cookControl Plus will automatically suggest the mode, time and temperature for your cooking. So why make it complicated when it can be simple?



roastingSensor Plus

## Intelligence as standard.



### softMove

For smooth operation, when you open or close your oven door the intelligent dampers ensure that the oven door is left to open and close gently and quietly. Available on all iQ700 built-in ovens.



softMove



Models shown: **HN678G4S6B** single oven, **CT636LES6** coffee machine, **BI630CNS1B** warming drawer, **CM678G4S6B** compact oven, **BI630CNS1B** warming drawer

## Steam cooking. The healthy way to cook



### fullSteam

With the Siemens HS858GXB6B and HS658GES6B multifunction fullSteam ovens you can prepare delicious and healthy vitamin-rich dishes. Choose the fullSteam option from the 15 different functions and use only hot steam to cook the food, which is perfect for rice, fish and vegetables. You therefore retain the food's full flavour, colour, vitamins and minerals while cooking without fat or oil. The iQ700 oven is easy to use, even for someone who has never cooked with steam before. fullSteam functionality is also available on Siemens compact oven models CS858GRB7B, CS656GBS7B, CD634GBS1B, CP465AGB0B and CP565AGS0B.



### pulseSteam

Siemens ovens and compact appliances with pulseSteam are real all-rounders for more flexibility with your cooking. It's easy to cook with steam while baking and roasting with hot air – with multifunction options you have the perfect cooking method for any food, preserving everything that is important: flavour, smell, texture, vitamins and nutrients. Siemens combi-steam ovens don't just work with hot air but also with top and bottom heating and grilling, so bread, cakes and roasts come out just right too: crisp on the outside and moist on the inside.

### How does it work?

Siemens steam and steam combination ovens are quick and easy to install as they do not require plumbing-in. Our fullSteam ovens have the temperature range indicated; whereas our pulseSteam models have three intensity levels which can be adjusted, depending on what is being cooked.

The removable 1 litre water tank (1.3 litre for compact steamer) is accessed behind the semi-automatic control panel making it more convenient and easier to refill, even during cooking. Water is heated by a fast and efficient steam generator before being introduced into the oven. Thermostatic controls allow a pure steam temperature of 30 – 100°C.



Model shown: **HR678GES6B** single oven



### 4D hotAir

Be flexible with your cooking. The innovative technology of the fan motor enables optimum heat distribution around the interior of the oven, as the oven is programmed to change the rotating direction of the fan every few minutes. Due to even distribution of heat within the cavity cooking on up to 4 shelf levels is possible. Your food therefore always turns out perfectly, just as you want it, no matter which shelf you choose to place it on.

## Rail Systems: The perfect accessories, designed especially for your iQ700 oven.

We supply accessories that help make cooking easier and more enjoyable for you. Great for tailoring your oven to your individual needs offering ease of use and flexible cooking options to help you create the perfect dish.



### iQ700 telescopic rails

Selected Siemens iQ700 ovens offer a single level, fully extendable telescopic rail<sup>1</sup>. Designed to glide smoothly and effortlessly out of the oven, these rails offer clear and comfortable access to tend to your food during cooking and to remove the food once cooked without having to reach into the hot oven. Optional single or triple telescopic rail sets are available for all models in the iQ700 range<sup>2</sup>, including versions suited to pyrolytic models which can remain in the appliance during the cleaning cycle, allowing you to effortlessly clean the oven and the rails at the same time.

<sup>1</sup> Please see product descriptions for models that have the rails as standard  
<sup>2</sup> Telescopic rails are not available as optional accessories on ovens with integral microwave



Fixed level telescopic rails



Your time is precious.  
Make more of it: iQ500.



Models shown: HB478GCB0B studioLine iQ500 single oven and LC67BHM50B 60cm box chimney hood

Get more time for outstanding cooking creations – with a wide range of innovative speed solutions.

Featuring more traditional, yet stylish, illuminated and easy to use control dials, the coordinated lightControl design allows the single ovens, built-in/under double ovens, compact microwave combination ovens, built-in microwave ovens, and warming drawers to be installed together, both vertically and horizontally\*.

Siemens offers a choice of three coordinating iQ500 45cm compact microwave combination ovens, each featuring the same striking blue and white lightControl display as the five iQ500 single ovens. Within this range are 3 studioLine iQ500 appliances.

The standard microwave combination oven features a large 36cm diameter turntable and microwave combination cooking options. Alternatively, the innovative CP565AGS0B features not only microwave and oven functionality, but also full steam and steam combination options – the ultimate in combination cooking and

perfect for maximising your options if space is a premium. New to the range is the studioLine CP465AGB0B which offers an extra edge in terms of design with its blackSteel fascia. Compact combination ovens are complemented by a 14cm high warming drawer to ensure complete iQ500 design coordination.

If you just need a microwave, the iQ500 range is completed by two design coordinated solo microwaves – a 25L version for installation in tall housing and a smaller 20L model design to fit into 30cm deep wall cupboards.

\*Horizontal combinations for single ovens and 45cm compact appliances only.

### Operation meets fascination:



#### lightControl

The new lightControl dial highlights the chosen heating symbol with a striking blue light – making operating the oven into an intuitive and exciting experience. The design is consistent throughout the iQ500 range, meaning whether you are selecting a cooking function on a single oven, or introducing steam to the 3 in 1 microwave combination compact appliance, lightControl dials will illuminate whichever function you need.



### iQ500 appliance display type compatibility

|                |            | iQ500 SINGLE OVENS |              |              |              |              |
|----------------|------------|--------------------|--------------|--------------|--------------|--------------|
| VIB            |            | HB478GCB0B         | HB458GCB0B   | HB578G550B   | HB578A050B   | HB535A050B   |
| Display type   |            | lightControl       | lightControl | lightControl | lightControl | lightControl |
| iQ500 COMPACTS | CP465AGS0B | ■                  | ■            |              |              |              |
|                | CP565AGS0B |                    |              | ■            | ■            | ■            |
|                | CM585AMS0B |                    |              | ■            | ■            | ■            |
|                | BF555LMS0B |                    |              | ■            | ■            | ■            |
|                | BF525LMS0B |                    |              | ■            | ■            | ■            |
|                | BI510CNR0B | ■                  | ■            | ■            | ■            | ■            |

### Guarantee the best cooking results:



#### cookControl

Providing automatic programmes for mainly meat, poultry and fish. Available in either 10 programmes or 30 programmes, simply suggest the desired dish and enter the food's weight – everything else is done automatically.



#### roastingSensor

The roasting thermometer is able to precisely and reliably measure the internal temperature of your dishes. By getting an accurate reading of the core temperature of roasts and other foods, it can determine when they are perfectly done.



#### 3D hotAir

With the 3D hotAir, you can cook on all three levels simultaneously. Your oven distributes the heat consistently and guarantees perfect baking results while preventing flavours and smells intermingling.

# Introducing Siemens iQ500 double ovens.



Model shown:  
MB578G550B built-in double oven

## softClosing Door

Adding to the ambience of any kitchen, the softClosing Door, on selected iQ500 models, closes by gently cushioning the last few centimetres for minimal noise and maximum comfort. In addition, a softClosing Door ensures that items within the appliance are not disturbed from a heavy impact, avoiding unnecessary spills to clean.

## iQ500 varioClip rails

Selected Siemens iQ500 single and double ovens<sup>1</sup> feature a pair of innovative varioClip telescopic rails. Intelligently designed with an easy release system, these rails can be unclipped and repositioned on any of the five shelf positions in the oven<sup>2</sup>, allowing you to tailor the position to suit what you are cooking. Whether grilling bacon for breakfast on one of the higher positions, or opting for a lower rail position to cook the Sunday roast, these fully extendable rails perfectly combine flexibility and convenience. Additional pairs of varioClip rails are available as optional extras, allowing you to personalise the rail systems for your oven.



varioClip rails – designed to be released and repositioned quickly and easily

<sup>1</sup>Please see product descriptions for models that have the rails as standard  
<sup>2</sup>varioClip rails suited only to the main oven on double ovens



If you are looking for extra flexibility and more cooking space a Siemens iQ500 double oven is the perfect solution.

Entertain guests with a variety of different foods, baking dessert in the main oven whilst heating savoury dishes within the top oven. Sitting seamlessly within your furniture, kitchen space is maximized without sacrificing the extra cavity space.

## Our double oven with activeClean® benefits.

A double oven with top of the range features. Built-in model MB578G550B features activeClean® in both the main and top cavity. activeClean® heats up the temperature of the oven to burn residue and allow for easy wipe away cleaning, saving you significant time when cleaning the oven. This model also includes the coolStart function, perfect for if you are always on the go and need to heat up meals quickly.

## A built-under to fit beneath work surfaces.

Alternatively the built-in oven model NB535ABS0B with a fast preheat and 3D hotAir cooking available in the main oven cavity, allows you to cook different types of foods flexibly on up to 3 shelving positions, without tastes mingling. It's slightly smaller overall size means this double oven can also fit underneath the work surface – ideal if you require the benefit of two cooking cavities, but are limited for space in your kitchen.

Please check individual models for exact specifications.



MB578G550B built-in double activeClean® oven



NB535ABS0B built-under double oven

## Key features of iQ500 double ovens:



**3D hotAir**  
Can cook all types of food on up to 3 levels simultaneously to stop flavours and smells intermingling.



**ecoClean® liners**  
A direct coating that lines the inside of the oven, ecoClean® makes cleaning the oven easy. The coated area cleans itself while the oven is on or can be activated with a cleaning programme. Available either as a full coating on the back, roof and sides or exclusively on the back panel.



**activeClean®**  
Heating the cavity up to 480°C, activeClean® burns away all dirt and grime to save time.



**Electronic control**  
Depending on the function selected, the oven will suggest a suitable temperature which can be manually adjusted. The selected temperature is displayed digitally and a heating up indicator shows the progress towards the set temperature; the same indicator shows residual heat once the oven is turned off. Get quick access to performance features like cookControl and cookControl plus whilst being safe in the knowledge that if left unadjusted for a period of time, the oven will switch off automatically.



**cookControl**  
Provides automatic programmes for the perfect preparation of meat, fish, vegetables and bread. Simply select the desired dish and enter the food's weight – everything else is done automatically. Either 10 or 30 programmes available, depending on the model.



**coolStart**  
No more preheating when cooking frozen convenience food. Using an intelligent heating phase, it's now possible to cook frozen food without waiting for the oven to preheat.



**roastingSensor**  
By getting an accurate reading of the core temperature of roasts and other foods, the roastingSensor can precisely and reliably measure the internal temperature of your dishes to determine when they are perfectly done.



**fast preheat**  
By activating all heating elements simultaneously, Siemens ovens with fast preheating get to the desired temperature very quickly.

# Explore compact ovens and microwaves.

## Microwave Combination Ovens\*

These models are designed to provide more functionality than a solo microwave oven, focussing on combination cooking, with the microwave using higher power (max. 600W) to lead the cooking process, supported by hot air or grill functions to deliver speedy crisp and browned results. Based around a more traditional microwave functionality these models offer the perfect solution if regular microwave heating is the priority, but with the back-up of separate or combination hot air cooking and grill functionality if required.

## Ovens with integral microwave\*

When teamed with a single oven, Siemens compact ovens with microwave offer a great alternative to a double oven if you require more space for traditional cooking. Designed first and foremost to function as an oven, with construction, features and functions identical to a traditional single oven, these models benefit from the addition of microwaves at low medium power (max. 360W) to deliver oven-led combination cooking. Our varioSpeed faster cooking feature speeds up the cooking process while retaining traditional cooking results.

\*These models are designed to operate best in combination mode, so when heating using microwave only, it may be necessary to adjust cooking times.

## Compact Ovens with Steam

Looking for healthier cooking options? The Siemens range of compact ovens with steam allow you to enjoy healthier meals using the power of steam to deliver juicier meats, crisped and fluffy baked items and vegetables that retain more of their vibrant colours, vitamins and nutrients. Siemens fullSteam models offer pure steam cooking, plus many models also offer pulseSteam – pulses of steam are injected into the oven to work in tandem with traditional cooking functions. Please check individual models for exact specifications.

## Inverter Technology

Inverter Technology delivers microwave power constantly while cooking – other, traditional microwaves are only able to deliver maximum power and manage the differing settings by alternating between on and off for specific time periods. This can result in uneven heating or over-cooked food and can be especially damaging to more delicate foods or smaller portions.

With Inverter technology, the microwave delivers power constantly, gradually managing the power levels down over time in order to control the food temperature. This gentle approach to cooking reduces uneven heating or overheated food and is especially beneficial for delicate foods. It may be necessary to adjust cooking times to ensure foods are thoroughly cooked before serving.

Siemens recommends that the maximum power setting be used for heating liquids and the microwave is calibrated to provide a burst of high power initially, before managing the power down in stages to the next level over the first few minutes.



CN878G4B6B compact pyrolytic oven with integral microwave



CM676GBS6B compact oven with integral microwave



CP565AGS0B compact microwave combination oven with steam



Models shown:  
HN678GES6B iQ700 single oven with integral microwave,  
CM678G4S6B iQ700 compact oven with integral microwave  
and BI630CNS1B iQ700 warming drawer

## Warming drawers

Perfect for warming plates, a Siemens warming drawer will keep food warm for latecomers – as well as keeping plates at an optimum temperature to ensure hot food keeps its warmth when plated. With adjustable temperatures of 40-80°C, a four-setting iQ700 14cm or 29cm high warming drawer can be installed as a standalone appliance, or acts as the perfect accompaniment to Siemens iQ700 ovens and compacts. The iQ500 range also includes a 14cm high warming drawer featuring 3 settings, designed to coordinate with Siemens iQ500 ovens and compacts.

The perfect line up of an oven, compact appliance with warming drawer is sure to bring style and elegance to any refined kitchen space.



BI510CNR0B iQ500 warming drawer

# Pure precision for perfect coffee indulgence.

Immerse yourself in the world of Siemens coffee. Kick-start your day or finish it in a relaxed mood in the evening. No matter how or when you prefer to enjoy your coffee Siemens has the right model. Such pleasure is made possible by the interaction of all components – a result of our years of experience and strong commitment to research and development.



## Pure precision for perfect coffee indulgence with our built-in coffee machines.

Stunningly, uniquely Siemens, our iQ700 built-in coffee centres convey an elegant impression of absolute quality and intelligent innovation for those passionate about coffee.

The design of the iQ700 coffee centres is perfectly aligned with the entire iQ700 series. To keep the sleek lines looking clean, all milk, water and bean containers are conveniently hidden behind the coffee centre's door, while the TFT touchDisplay and LED lights put each coffee in the spotlight.

Designed with easy access to the water tank, bean holder and insulated milk jug, the coffee centre has front access thanks to a hinged front panel – so it's quick to replace the water or beans. The milk tubes are also cleaned with steam after every coffee with milk and as most of the components are removable and dishwasher safe, they are also easy to clean. Easy to install, the machine requires no extra plumbing. Choose a built-in iQ700 coffee machine from our core collection or our top of the range studioLine collection.



Model shown: CT636LES6 built-in coffee centre with TFT touchDisplay



**oneTouch function**  
No matter what coffee speciality you desire, whether it is latte macchiato, creamy cappuccino or extra-strong espresso, thanks to the oneTouch Function your fully automatic coffee machine can serve you up pure coffee indulgence at just the touch of a button – it's as easy as that. The system prepares coffee and milk specialities automatically – just how you like them. The perfect technology for a thoroughly indulgent coffee experience.



**sensoFlow system**  
Different coffees require the espresso shot to be heated at a different temperature in order to achieve the perfect results. sensoFlow does this automatically, providing you with a delicious beverage again and again.

## Enjoy the wide world of coffee. While relaxing on your sofa.

With Siemens EQ.9 700's bean-to-cup coffee machine and Built-in models with Home Connect, you can discover the world of great coffee in just one app and benefit from exclusive varieties and intuitive remote functions directly with a smartphone or tablet.


### Home Connect

Explore new coffee varieties, by selecting drinks through the app, design coffee playlists so you and your guests can save drink preferences and send drinks to the machine so they are automatically prepared one after the other. Connected partners including Amazon Alexa, allow you to ask your coffee machine to make you a drink just by voice control whilst IFTTT allows you to create bespoke applets so that you can connect your coffee machine to other smart home appliances and create a fully connected home.



## iQ700 CT836LEB6

Built-in coffee centre  
Black

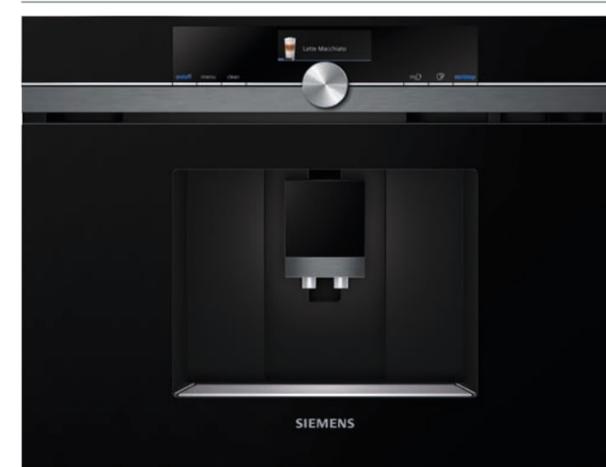

Built-in coffee centre specifications

| APPLIANCE TYPE                               | COFFEE CENTRES – BUILT-IN |                 |
|--|---------------------------|-----------------|
|  | iQ700                     | iQ700           |
| Design family                                | CT836LEB6                 | CT636LES6       |
| Model number                                 | CT836LEB6                 | CT636LES6       |
| TFT touchDisplay                             | ■                         | ■               |
| <b>KEY FEATURES</b>                          |                           |                 |
| Home Connect                                 | ■                         | ■               |
| Electronic control                           | ■                         | ■               |
| sensoFlow System                             | ■                         | ■               |
| Aroma pressure system                        | ■                         | ■               |
| Auto Valve System                            | ■                         | ■               |
| AromaDoubleShot                              | ■                         | ■               |
| Automatic steam blast milk cleaning function | ■                         | ■               |
| One touch preparation                        | ■                         | ■               |
| Ceramic coffee grinders                      | ■                         | ■               |
| Multilevel grinding setting                  | ■                         | ■               |
| Cup illumination                             | ■                         | ■               |
| Height adjustable coffee & milk outlets (mm) | 7-15                      | 7-15            |
| Adjustable automatic switch off setting      | ■                         | ■               |
| Integrated water filter                      | ■                         | ■               |
| <b>PROGRAMMES / FUNCTIONS</b>                |                           |                 |
| my Coffee - personalised beverage settings   | 1 or 2 cup                | 1 or 2 cup      |
| Milk foam                                    | 1 or 2 cup                | 1 or 2 cup      |
| Hot water                                    | 1 or 2 cup                | 1 or 2 cup      |
| Warm milk                                    | 1 or 2 cup                | 1 or 2 cup      |
| Ristretto                                    | 1 or 2 cup                | 1 or 2 cup      |
| Coffee                                       | 1 or 2 cup                | 1 or 2 cup      |
| Espresso                                     | 1 or 2 cup                | 1 or 2 cup      |
| Cappuccino                                   | 1 or 2 cup                | 1 or 2 cup      |
| Latte Macchiato                              | 1 or 2 cup                | 1 or 2 cup      |
| Caffe latte                                  | 1 or 2 cup                | 1 or 2 cup      |
| Espresso Macchiato                           | 1 or 2 cup                | 1 or 2 cup      |
| One touch function for milk drinks           | ■                         | ■               |
| Coffee / Hot water temperature options       | 3 / 4                     | 3 / 4           |
| Milk foam/fothing function                   | ■ / ■                     | ■ / ■           |
| Warm Milk function                           | ■                         | ■               |
| Cleaning / descaling / programmes            | ■ / ■                     | ■ / ■           |
| Automatic rinse when switched on/off         | ■ / ■                     | ■ / ■           |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>   |                           |                 |
| Installation in a tall housing               | 950-1450mm high           | 950-1450mm high |
| Side opening door (left hinged)              | ■                         | ■               |
| Brewing chamber volume (g)                   | 8-12                      | 8-12            |
| Bean container capacity (g)                  | 500                       | 500             |
| Ground coffee container                      | ■                         | ■               |
| Water tank capacity (litres)                 | 2.4                       | 2.4             |
| Total connected loading (W)                  | 1600                      | 1600            |
| Cable length (in cm)                         | 170                       | 170             |
| <b>STANDARD ACCESSORIES</b>                  |                           |                 |
| Insulated Milk container capacity (litres)   | 0.5                       | 0.5             |
| Milk pipe                                    | ■                         | ■               |
| Coffee measuring spoon                       | ■                         | ■               |



# UnEQualled coffee shop experiences. At home. In style.

Siemens EQ innovation. Your in-home barista.



Models shown: EQ.6 plus s700, EQ.9 plus s700 and EQ.3 s500 bean-to-cup coffee machines



Open your personal coffee bar and enjoy delicious barista-style drinks at home with our freestanding coffee machines.

Siemens are excited to introduce a new range of EQ fully automatic bean-to-cup coffee machines designed for those that settle for nothing less than exceptional coffee.

With intelligent iAroma technology, 3 key innovations are combined together in a high quality brewing unit to deliver truly sensational tasting beverages. These intuitive appliances stand out on any premium kitchen surface with their stunning design, elegant display panels and optimal usability. From the entry-level compact EQ.3 models to the fine-tuned Wi-Fi-connected EQ.9 model, rediscover your love for outstanding coffee with the new Siemens EQ range.

## Introducing our top of the range machine: EQ.9 plus s700



**baristaMode: individualise your coffee creation**  
There are five essential parameters of baristaMode that contribute to the quality of coffee and espresso: coffee strength, amount, temperature, coffee-to-milk ratio and brewing speed. By switching to baristaMode, you can make even finer, fully customised adjustments to please any coffee taste. This optimised setting lets you celebrate the fine art of coffee preparation.



**dualBean System: separate bean containers for a pure taste**  
Two separate coffee bean containers, each with its own grinder, ensure that your beans never get mixed up and guarantee that the desired flavour will always be achieved.

### iQ700 TI9573X9RW

EQ.9 plus s700 freestanding bean-to-cup coffee machine Piano black and stainless steel



**OneTouch doubleCup**  
Impress your guests with the simultaneous preparation of two coffee-milk specialities at once. Most of our range has an integrated coffee and milk outlet with double spouts, giving you a little more time to share your delicious coffee with friends.



**TFT display**  
With a large, clear and colourful TFT display and disc control manage your drink preference easily and simply with our EQ.9 plus s700 machine.



Freestanding bean-to-cup coffee machine specifications


|                              | EQ.9                                    | EQ.6                | EQ.3        |
|------------------------------|---|---------------------|-------------|
| Model name                   | EQ.9 plus, s700                         | EQ.6 plus s700      | EQ.3 s100   |
| Model number                 | TI9573X9RW                              | TE657313RW          | TI301209RW  |
| <b>FEATURES</b>              |   |                     |             |
| Material / finish            | Piano black front, stainless steel body | Front and top metal | Piano black |
| SensioFlow Heater            | ■                                       | ■                   | ■           |
| Ceramic grinder              | Ceramdrive                              | Ceramdrive          | 1 x ceramic |
| Removable brewing unit       | ■                                       | ■                   | ■           |
| Pump Pressure                | 19 bar                                  | 19 bar              | 15 bar      |
| Display                      | TFT                                     | Touch display       | No display  |
| Temperature settings         | 6                                       | 3                   | 3           |
| Noise level                  | Super silent                            | Quiet               | Standard    |
| Connectivity                 | Home Connect                            | No                  | -           |
| User Profiles                | 10                                      | 6                   | 0           |
| Barista mode                 | ■                                       | -                   | -           |
| Milk solution                | Integrated                              | Milk nozzle         | In cup      |
| Bean container capacity (g)  | 270 and 250                             | 300                 | 250         |
| Water tank capacity (litres) | 2.3                                     | 1.7                 | 1.4         |
| One touch drinks             | ■                                       | ■                   | ■           |
| Beverage choice              | 11+                                     | 8                   | 4           |
| One touch double cup         | incl. milky drinks                      | incl. milky drinks  | No          |
| Strength settings            | 10 + 3                                  | 6                   | No          |
| Coffee-milk ratio adjusts    | ■                                       | ■                   | -           |
| Number of bean grinders      | 2                                       | 1                   | 1           |
| Cup warmer                   | -                                       | -                   | -           |
| Bean lid rubber seal         | ■                                       | ■                   | ■           |
| Brewing unit type            | Spindle                                 | Unit with lever     | Spindle     |
| Service door access          | Side                                    | Side                | Front       |
| Cup illumination             | ■                                       | ■                   | -           |

■ Yes, model has this feature. - Feature not available for this model.

For specification details, please visit [siemens-home.bsh-group.com/uk](http://siemens-home.bsh-group.com/uk) and download a full specification sheet.

For the full range of accessories please visit our online accessory shop on [siemens-home.bsh-group.com/uk/shop](http://siemens-home.bsh-group.com/uk/shop) or call our Spares Department on 0344 892 8999.

# Perfect built-in design and incredible results with iQ700 studioLine.

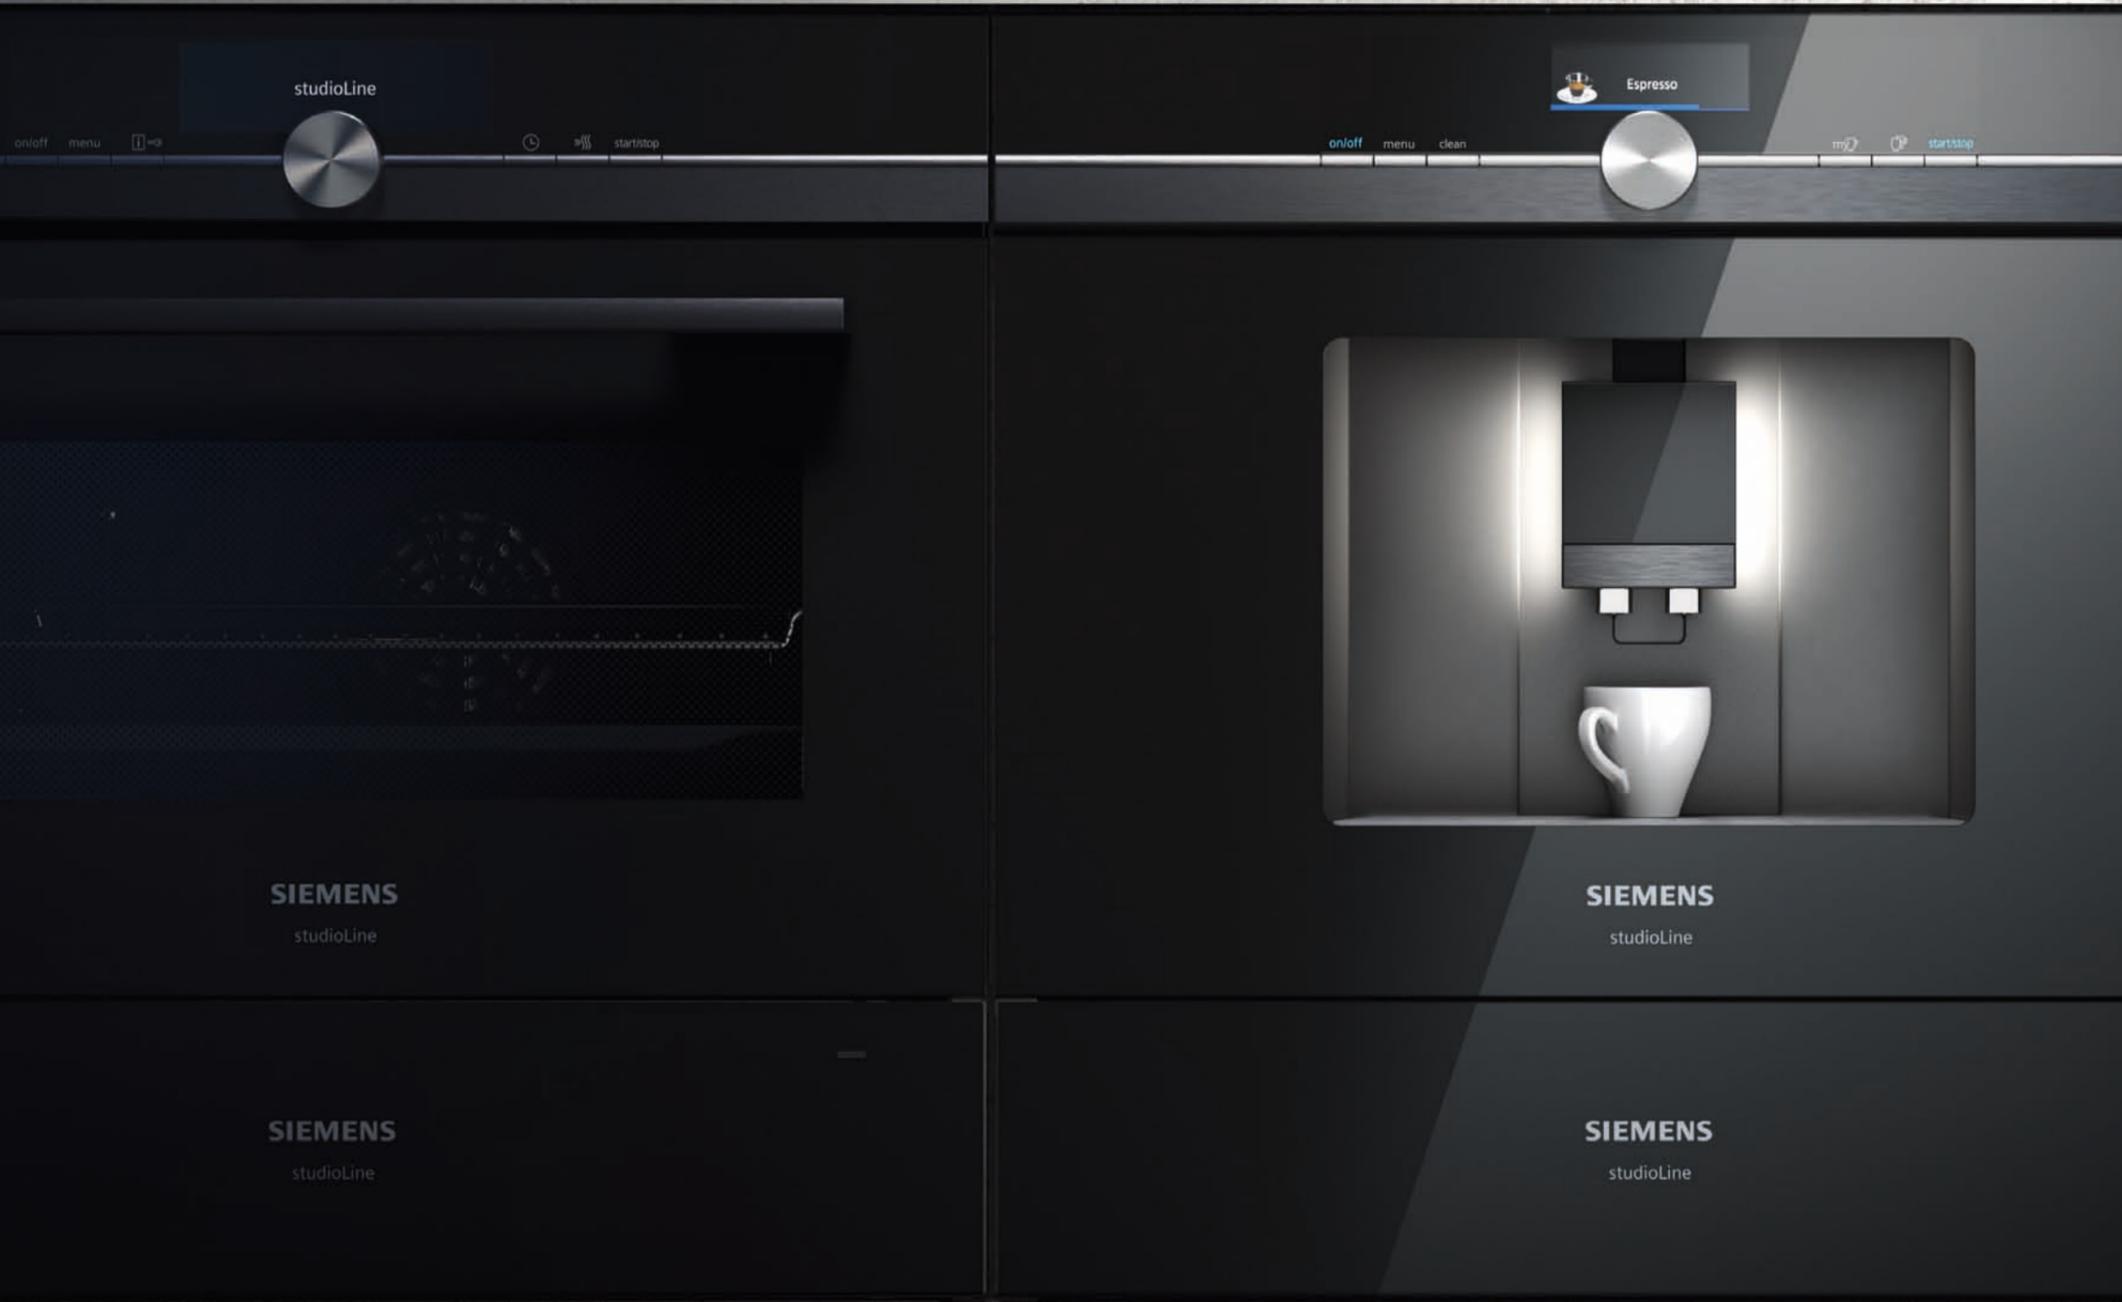

Designed for those who value the ultimate in style, innovation and intelligent features.

The characteristic look of the studioLine built in ovens, compacts, coffee machine and warming drawer range balances clean lines with intuitive controls and state-of-the-art technology for a unparalleled experience. Coordinated design, blackSteel handles, stainless steel disc controls and big and bright TFT touchDisplays combine to create a guaranteed design statement. The sleek stainless blackSteel appearance offers a solid, quality aesthetic and is used across the studioLine range so you can seamlessly match your cooking appliance to your coffee machine, hob and hood.

Exclusive to studioLine, prepare and cook food with the most exquisite flavours and delicate textures using the sous-vide setting and vacuum drawer.

Sous-vide means, food is cooked extremely tender with steam under constantly low temperatures. This unique cooking method saves vitamins and aromas.

This is achieved by vacuum sealing your ingredients in the Siemens vacuum drawer and leaving them to marinate before cooking gently on an exact low temperature in your HS858GXB6B studioLine single oven or CSA858GRB7B studioLine compact steam oven. This ensures that any moisture and flavour is fully absorbed into the food, for a gastronomic fine-dining experience in your own home.



BV830ENB1B vacuum drawer

Models shown left: CS858GRB7B Compact Steam Oven with Sous Vide, BV830ENB1B Vacuum Drawer, CT836LEB6 built-in coffee centre, B1830CNS1B warming drawer



# Cooking to perfection with iQ500 studioLine.

With two ovens and one compact appliance in the collection the iQ500 studioLine stunning range of appliances embraces the same signature black glass and blackSteel design aesthetic of the iQ700 range however offers a different control panel consisting of two blue illuminated lightControl discs. With premium features including cookControl and fast preheat, trend-setting stylish displays, intuitive controls and clear vibrant LCD interface the fashionable iQ500 studioLine range steals the show in any kitchen.



Model shown: HB478GCB0B single oven with activeClean

# Single ovens

with TFT touchDisplay Plus

## iQ 700 HN878G4B6B

Single oven with microwave and pulseSteam  
blackSteel



Single ovens with TFT touchDisplay Plus specifications

| APPLIANCE TYPE  | PYROLYTIC OVEN WITH INTEGRAL MICROWAVE & PULSESTEAM | PYROLYTIC OVEN WITH INTEGRAL MICROWAVE & PULSESTEAM |
|---|---|---|
| <b>Design family</b>  | <b>iQ 700</b>                                       | <b>iQ 700</b>                                       |
| Model number  | HN878G4B6B  | HN678GE56B  |
| TFT touchDisplay Plus                                       | ■   | ■   |
| TFT touchDisplay  | -   | -   |
| TFT Display   | -   | -   |
| lightControl illuminated dials                              | -   | -   |
| <b>KEY FEATURES</b>   |   |   |
| Home Connect  | ■   | ■   |
| varioSpeed  | ■   | ■   |
| coolStart   | ■   | ■   |
| Fast pre-heating function                                   | ■   | ■   |
| cookControl Plus  | ■   | ■   |
| cookControl   | -   | -   |
| roastingSensor Plus   | ■   | ■   |
| roastingSensor  | -   | -   |
| bakingSensor Plus   | ■   | ■   |
| fullSteam   | -   | -   |
| pulseSteam  | ■   | ■   |
| Cleaning and de-scaling                                     | ■   | ■   |
| Drying programme  | ■   | ■   |
| Electronic control  | ■   | ■   |
| Sabbath setting   | ■   | ■   |
| activeClean® pyrolytic oven cleaning                        | ■   | ■   |
| Back / roof / side ecoClean® Direct liners                  | - / - / -   | - / - / -   |
| 4D hotAir cooking   | ■   | ■   |
| 3D hotAir cooking   | -   | -   |
| Telescopic rails  | 1 level   | -   |
| softMove door opening and closing                           | ■   | ■   |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |   |   |
| Oven capacity <sup>2</sup> (litres)                         | 67  | 67  |
| Energy efficiency class <sup>2</sup>                        | -   | -   |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | -   | -   |
| Energy consumption conventional (kWh) <sup>2</sup>          | -   | -   |
| Time to cook standard load (mins)                           | -   | -   |
| Largest baking sheet area (cm)                              | 1290  | 1290  |
| Inverter technology   | ■   | ■   |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | 800 / 5   | 800 / 5   |
| Total connected loading (watts)                             | 3600  | 3600  |
| Cable length (cm)   | 120   | 120   |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |   |   |
| hotAirGentle / Conventional gentle                          | ■ / ■   | ■ / ■   |
| Full width / Centre surface grill                           | ■ / ■   | ■ / ■   |
| Hot air grilling / Pizza Setting                            | ■ / ■   | ■ / ■   |
| Conventional top & bottom heating                           | ■   | ■   |
| Bottom heat / Intensive heat                                | ■ / ■   | ■ / ■   |
| Keep warm / Plate warming                                   | ■ / ■   | ■ / ■   |
| Low temperature cooking                                     | ■   | ■   |
| Dehydrate   | ■   | ■   |
| <b>STANDARD ACCESSORIES</b>                                 |   |   |
| Full width enamelled pan / wire shelves                     | 1 / 2   | 1 / 2   |
| Steam trays   | -   | -   |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.  
<sup>2</sup> Measured in accordance with EN50304; 65/2014



Single ovens with TFT touchDisplay Plus specifications

| APPLIANCE TYPE  | PYROLYTIC OVEN WITH INTEGRAL MICROWAVE | PYROLYTIC OVEN WITH PULSESTEAM | PYROLYTIC OVEN | PYROLYTIC OVEN | FULLSTEAM OVEN WITH ECOCLEAN® PLUS | FULLSTEAM OVEN WITH ECOCLEAN® PLUS |
|---|--|--------------------------------|----------------|----------------|------------------------------------|------------------------------------|
| <b>Design family</b>  | <b>iQ 700</b>                          | <b>iQ 700</b>                  | <b>iQ 700</b>  | <b>iQ 700</b>  | <b>iQ 700</b>                      | <b>iQ 700</b>                      |
| Model Number  | HM678G456B                             | HR678GE56B                     | HB878GB86B     | HB678GB56B     | HS858GX86B                         | HS658GE56B                         |
| TFT touchDisplay Plus                                       | ■                                      | ■                              | ■              | ■              | ■                                  | ■                                  |
| TFT touchDisplay  | -                                      | -                              | -              | -              | -                                  | -                                  |
| TFT Display   | -                                      | -                              | -              | -              | -                                  | -                                  |
| lightControl illuminated dials                              | -                                      | -                              | -              | -              | -                                  | -                                  |
| <b>KEY FEATURES</b>   |  |                                |                |                |                                    |                                    |
| Home Connect  | ■                                      | ■                              | ■              | ■              | ■                                  | ■                                  |
| varioSpeed  | ■                                      | -                              | -              | -              | -                                  | -                                  |
| coolStart   | ■                                      | ■                              | ■              | ■              | ■                                  | ■                                  |
| Fast pre-heating function                                   | ■                                      | ■                              | ■              | ■              | ■                                  | ■                                  |
| cookControl Plus  | ■                                      | ■                              | ■              | ■              | ■                                  | ■                                  |
| cookControl   | -                                      | -                              | -              | -              | -                                  | -                                  |
| roastingSensor Plus   | ■                                      | ■                              | ■              | ■              | ■                                  | ■                                  |
| roastingSensor  | -                                      | -                              | -              | -              | -                                  | -                                  |
| bakingSensor Plus   | ■                                      | ■                              | ■              | ■              | ■                                  | ■                                  |
| fullSteam   | -                                      | -                              | -              | -              | ■                                  | ■                                  |
| pulseSteam  | -                                      | ■                              | -              | -              | ■                                  | ■                                  |
| Cleaning and de-scaling                                     | -                                      | ■                              | -              | -              | ■                                  | ■                                  |
| Drying programme  | -                                      | ■                              | -              | -              | ■                                  | ■                                  |
| Electronic control  | ■                                      | ■                              | ■              | ■              | ■                                  | ■                                  |
| Sabbath setting   | ■                                      | ■                              | ■              | ■              | ■                                  | ■                                  |
| activeClean® pyrolytic oven cleaning                        | ■                                      | ■                              | ■              | ■              | -                                  | -                                  |
| Back / roof / side ecoClean® Direct liners                  | - / - / -                              | - / - / -                      | - / - / -      | - / - / -      | ■ / ■ / ■                          | ■ / ■ / ■                          |
| 4D hotAir cooking   | ■                                      | ■                              | ■              | ■              | ■                                  | ■                                  |
| 3D hotAir cooking   | -                                      | -                              | -              | -              | -                                  | -                                  |
| Telescopic rails  | 1 level                                | -                              | -              | -              | 3 levels                           | -                                  |
| softMove door opening and closing                           | ■                                      | ■                              | ■              | ■              | ■                                  | ■                                  |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |  |                                |                |                |                                    |                                    |
| Oven capacity <sup>2</sup> (litres)                         | 67                                     | 71                             | 71             | 71             | 71                                 | 71                                 |
| Energy efficiency class <sup>2</sup>                        | -                                      | A+                             | A+             | A+             | A+                                 | A+                                 |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | -                                      | 0.69                           | 0.69           | 0.69           | 0.69                               | 0.69                               |
| Energy consumption conventional (kWh) <sup>2</sup>          | -                                      | 0.87                           | 0.87           | 0.87           | 0.87                               | 0.87                               |
| Time to cook standard load (mins)                           | -                                      | 44                             | 44             | 44             | 40                                 | 40                                 |
| Largest baking sheet area (cm)                              | 1290                                   | 1290                           | 1290           | 1290           | 1290                               | 1290                               |
| Inverter technology   | ■                                      | -                              | -              | -              | -                                  | -                                  |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | 800 / 5                                | -                              | -              | -              | -                                  | -                                  |
| Total connected loading (watts)                             | 3600                                   | 3600                           | 3600           | 3600           | 3450                               | 3450                               |
| Cable length (cm)   | 120                                    | 120                            | 120            | 120            | 120                                | 120                                |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |  |                                |                |                |                                    |                                    |
| hotAirGentle / Conventional gentle                          | ■ / ■                                  | ■ / ■                          | ■ / ■          | ■ / ■          | ■ / ■                              | ■ / ■                              |
| Full width / Centre surface grill                           | ■ / ■                                  | ■ / ■                          | ■ / ■          | ■ / ■          | ■ / ■                              | ■ / ■                              |
| Hot air grilling / Pizza Setting                            | ■ / ■                                  | ■ / ■                          | ■ / ■          | ■ / ■          | ■ / ■                              | ■ / ■                              |
| Conventional top & bottom heating                           | ■                                      | ■                              | ■              | ■              | ■                                  | ■                                  |
| Bottom heat / Intensive heat                                | ■ / ■                                  | ■ / ■                          | ■ / ■          | ■ / ■          | ■ / ■                              | ■ / ■                              |
| Keep warm / Plate warming                                   | ■ / ■                                  | ■ / ■                          | ■ / ■          | ■ / ■          | ■ / ■                              | ■ / ■                              |
| Low temperature cooking                                     | ■                                      | ■                              | ■              | ■              | ■                                  | ■                                  |
| Dehydrate   | ■                                      | ■                              | ■              | ■              | ■                                  | ■                                  |
| <b>STANDARD ACCESSORIES</b>                                 |  |                                |                |                |                                    |                                    |
| Full width enamelled pan / wire shelves                     | 1 / 2                                  | 1 / 2                          | 1 / 2          | 1 / 2          | 1 / 2                              | 1 / 2                              |
| Steam trays   | -                                      | -                              | -              | -              | 2 x Small, 1 x Extra large         | 3                                  |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.  
<sup>2</sup> Measured in accordance with EN50304; 65/2014

# Single ovens

with TFT touchDisplay

## iQ 700 HM676G0S6B

Single multi-function oven  
Black, stainless steel



### Single ovens with TFT touchDisplay specifications

| APPLIANCE TYPE  | PYROLYTIC OVEN WITH INTEGRAL MICROWAVE |
|---|--|
| <b>Design family</b>  | <b>iQ 700</b>                          |
| Model number  | HM676G0S6B                             |
| TFT touchDisplay Plus                                       | -                                      |
| TFT touchDisplay  | ■                                      |
| TFT Display   | -                                      |
| lightControl illuminated dials                              | -                                      |
| <b>KEY FEATURES</b>   |  |
| Home Connect  | ■                                      |
| varioSpeed  | ■                                      |
| coolStart   | ■                                      |
| Fast pre-heating function                                   | ■                                      |
| cookControl Plus  | ■                                      |
| cookControl   | -                                      |
| roastingSensor Plus   | -                                      |
| roastingSensor  | -                                      |
| bakingSensor Plus   | -                                      |
| fullSteam   | -                                      |
| pulseSteam  | -                                      |
| Cleaning and de-scaling                                     | -                                      |
| Drying programme  | -                                      |
| Electronic control  | ■                                      |
| Sabbath setting   | ■                                      |
| activeClean® pyrolytic oven cleaning                        | ■                                      |
| Back / roof / side ecoClean® Direct liners                  | - / - / -                              |
| 4D hotAir cooking   | ■                                      |
| 3D hotAir cooking   | -                                      |
| Telescopic rails  | 1 level                                |
| softMove door opening and closing                           | ■                                      |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |  |
| Oven capacity <sup>2</sup> (litres)                         | 67                                     |
| Energy efficiency class <sup>2</sup>                        | -                                      |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | -                                      |
| Energy consumption conventional (kWh) <sup>2</sup>          | -                                      |
| Time to cook standard load (mins)                           | -                                      |
| Largest baking sheet area (cm)                              | 1290                                   |
| Inverter technology   | ■                                      |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | 800 / 5                                |
| Total connected loading (watts)                             | 3600                                   |
| Cable length (cm)   | 120                                    |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |  |
| hotAirGentle / Conventional gentle                          | ■ / ■                                  |
| Full width / Centre surface grill                           | ■ / ■                                  |
| Hot air grilling / Pizza Setting                            | ■ / ■                                  |
| Conventional top & bottom heating                           | ■                                      |
| Bottom heat / Intensive heat                                | ■ / -                                  |
| Keep warm / Plate warming                                   | ■ / ■                                  |
| Low temperature cooking                                     | ■                                      |
| Dehydrate   | -                                      |
| <b>STANDARD ACCESSORIES</b>                                 |  |
| Full width enamelled pan / wire shelves                     | 1 / 2                                  |
| Steam trays   | -                                      |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

<sup>2</sup> Measured in accordance with EN50304; 65/2014



### Single ovens with TFT touchDisplay specifications

| APPLIANCE TYPE  | PYROLYTIC OVEN WITH PULSESTEAM | PYROLYTIC OVEN | PYROLYTIC OVEN WITH INTEGRAL MICROWAVE | OVEN WITH ECOCLEAN PLUS |
|---|--------------------------------|----------------|--|-------------------------|
| <b>Design family</b>  | <b>iQ 700</b>                  | <b>iQ 700</b>  | <b>iQ 700</b>                          | <b>iQ 700</b>           |
| Model number  | HR676GBS6B                     | HB676GBS6B     | HM656GN56B                             | HB656GBS6B              |
| TFT touchDisplay Plus                                       | -                              | -              | -                                      | -                       |
| TFT touchDisplay  | ■                              | ■              | ■                                      | ■                       |
| TFT Display   | -                              | -              | -                                      | -                       |
| lightControl illuminated dials                              | -                              | -              | -                                      | -                       |
| <b>KEY FEATURES</b>   |                                |                |  |                         |
| Home Connect  | ■                              | ■              | ■                                      | ■                       |
| varioSpeed  | -                              | -              | ■                                      | -                       |
| coolStart   | ■                              | ■              | ■                                      | ■                       |
| Fast pre-heating function                                   | ■                              | ■              | ■                                      | ■                       |
| cookControl Plus  | ■                              | ■              | ■                                      | ■                       |
| cookControl   | -                              | -              | -                                      | -                       |
| roastingSensor Plus   | -                              | -              | -                                      | -                       |
| roastingSensor  | -                              | -              | -                                      | -                       |
| bakingSensor Plus   | -                              | -              | -                                      | -                       |
| fullSteam   | -                              | -              | -                                      | -                       |
| pulseSteam  | ■                              | -              | -                                      | -                       |
| Cleaning and de-scaling                                     | ■                              | -              | -                                      | -                       |
| Drying programme  | ■                              | -              | -                                      | -                       |
| Electronic control  | ■                              | ■              | ■                                      | ■                       |
| Sabbath setting   | ■                              | ■              | ■                                      | ■                       |
| activeClean® pyrolytic oven cleaning                        | ■                              | ■              | -                                      | -                       |
| Back / roof / side ecoClean® Direct liners                  | - / - / -                      | - / - / -      | ■ / ■ / ■                              | ■ / ■ / ■               |
| 4D hotAir cooking   | ■                              | ■              | ■                                      | ■                       |
| 3D hotAir cooking   | -                              | -              | -                                      | -                       |
| Telescopic rails  | -                              | -              | 1 level                                | -                       |
| softMove door opening and closing                           | ■                              | ■              | ■                                      | ■                       |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |                                |                |  |                         |
| Oven capacity <sup>2</sup> (litres)                         | 71                             | 71             | 67                                     | 71                      |
| Energy efficiency class <sup>2</sup>                        | A+                             | A+             | -                                      | A+                      |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | 0.69                           | 0.69           | -                                      | 0.69                    |
| Energy consumption conventional (kWh) <sup>2</sup>          | 0.87                           | 0.87           | -                                      | 0.87                    |
| Time to cook standard load (mins)                           | 44                             | 44             | -                                      | 44                      |
| Largest baking sheet area (cm)                              | 1290                           | 1290           | 1290                                   | 1290                    |
| Inverter technology   | -                              | -              | -                                      | -                       |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | -                              | -              | 800 / 5                                | -                       |
| Total connected loading (watts)                             | 3600                           | 3600           | 3600                                   | 3600                    |
| Cable length (cm)   | 120                            | 120            | 120                                    | 120                     |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |                                |                |  |                         |
| hotAirGentle / Conventional gentle                          | ■ / ■                          | ■ / ■          | ■ / ■                                  | ■ / ■                   |
| Full width / Centre surface grill                           | ■ / ■                          | ■ / ■          | ■ / ■                                  | ■ / ■                   |
| Hot air grilling / Pizza Setting                            | ■ / ■                          | ■ / ■          | ■ / ■                                  | ■ / ■                   |
| Conventional top & bottom heating                           | ■                              | ■              | ■                                      | ■                       |
| Bottom heat / Intensive heat                                | ■ / -                          | ■ / -          | ■ / -                                  | ■ / -                   |
| Keep warm / Plate warming                                   | ■ / ■                          | ■ / ■          | ■ / ■                                  | ■ / ■                   |
| Low temperature cooking                                     | ■                              | ■              | ■                                      | ■                       |
| Dehydrate   | -                              | -              | -                                      | -                       |
| <b>STANDARD ACCESSORIES</b>                                 |                                |                |  |                         |
| Full width enamelled pan / wire shelves                     | 1 / 2                          | 1 / 2          | 1 / 2                                  | 1 / 2                   |
| Steam trays   | -                              | -              | -                                      | -                       |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

<sup>2</sup> Measured in accordance with EN50304; 65/2014



Model shown: HB672GBS1B single oven

# Single ovens

with TFT Display

## iQ700 HB672GBS1B

Single multi-function oven  
Black, stainless steel



2  
Year Warranty



Single ovens with TFT Display specifications

| APPLIANCE TYPE  | PYROLYTIC OVEN | OVEN WITH ECOCLEAN |
|---|----------------|--------------------|
| <b>Design family</b>  | <b>iQ700</b>   | <b>iQ700</b>       |
| Model number  | HB672GBS1B     | HB632GBS1B         |
| TFT touchDisplay Plus                                       | -              | -                  |
| TFT touchDisplay  | -              | -                  |
| TFT Display   | ■              | ■                  |
| lightControl illuminated dials                              | -              | -                  |
| <b>KEY FEATURES</b>   |                |                    |
| Home Connect  | -              | -                  |
| varioSpeed  | -              | -                  |
| coolStart   | ■              | ■                  |
| Fast pre-heating function                                   | ■              | ■                  |
| cookControl Plus  | -              | -                  |
| cookControl   | -              | -                  |
| roastingSensor Plus   | -              | -                  |
| roastingSensor  | -              | -                  |
| bakingSensor Plus   | -              | -                  |
| fullSteam   | -              | -                  |
| pulseSteam  | -              | -                  |
| Cleaning and de-scaling                                     | -              | -                  |
| Drying programme  | -              | -                  |
| Electronic control  | ■              | ■                  |
| Sabbath setting   | ■              | ■                  |
| activeClean® pyrolytic oven cleaning                        | ■              | -                  |
| Back / roof / side ecoClean® Direct liners                  | - / - / -      | ■ / - / -          |
| 4D hotAir cooking   | ■              | ■                  |
| 3D hotAir cooking   | -              | -                  |
| Telescopic rails  | -              | -                  |
| softMove door opening and closing                           | ■              | ■                  |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |                |                    |
| Oven capacity <sup>2</sup> (litres)                         | 71             | 71                 |
| Energy efficiency class <sup>2</sup>                        | A+             | A+                 |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | 0.69           | 0.69               |
| Energy consumption conventional (kWh) <sup>2</sup>          | 0.87           | 0.87               |
| Time to cook standard load (mins)                           | 44             | 44                 |
| Largest baking sheet area (cm)                              | 1290           | 1290               |
| Inverter technology   | -              | -                  |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | -              | -                  |
| Total connected loading (watts)                             | 3600           | 3600               |
| Cable length (cm)   | 120            | 120                |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |                |                    |
| hotairGentle / Conventional gentle                          | ■ / ■          | ■ / ■              |
| Full width / Centre surface grill                           | ■ / -          | ■ / -              |
| Hot air grilling / Pizza Setting                            | ■ / ■          | ■ / ■              |
| Conventional top & bottom heating                           | ■              | ■                  |
| Bottom heat / Intensive heat                                | -              | -                  |
| Keep warm / Plate warming                                   | - / -          | - / -              |
| Low temperature cooking                                     | -              | -                  |
| Dehydrate   | -              | -                  |
| <b>STANDARD ACCESSORIES</b>                                 |                |                    |
| Full width enamelled pan / wire shelves                     | 1 / 2          | 1 / 2              |
| Steam trays   | -              | -                  |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup>For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

<sup>2</sup>Measured in accordance with EN50304; 65/2014

# Single ovens

with lightControl illuminated dials

## iQ 500 HB478GCB0B

Single oven with activeClean  
blackSteel



Single ovens with lightControl  
illuminated dial specifications

| APPLIANCE TYPE  | PYROLYTIC OVEN |
|---|----------------|
| <b>Display family</b>                                       | <b>iQ 500</b>  |
| Model Number  | HB478GCB0B     |
| TFT touchDisplay Plus                                       | -              |
| TFT touchDisplay  | -              |
| TFT Display   | -              |
| lightControl illuminated dials                              | ■              |
| <b>KEY FEATURES</b>   |                |
| Home Connect  | -              |
| varioSpeed  | -              |
| coolStart   | ■              |
| Fast pre-heating function                                   | ■              |
| cookControl Plus  | -              |
| cookControl   | 30             |
| roastingSensor Plus   | -              |
| roastingSensor  | ■              |
| bakingSensor Plus   | -              |
| fullSteam   | -              |
| pulseSteam  | -              |
| Cleaning and de-scaling                                     | -              |
| Drying programme  | -              |
| Electronic control  | ■              |
| Sabbath setting   | ■              |
| activeClean® pyrolytic oven cleaning                        | ■              |
| Back / roof / side ecoClean® Direct liners                  | - / - / -      |
| 4D hotAir cooking   | -              |
| 3D hotAir cooking   | ■              |
| Telescopic rails  | -              |
| softMove door opening and closing                           | softClose      |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |                |
| Oven capacity <sup>2</sup> (litres)                         | 71             |
| Energy efficiency class <sup>2</sup>                        | A              |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | 0.81           |
| Energy consumption conventional (kWh) <sup>2</sup>          | 0.99           |
| Time to cook standard load (mins)                           | 50             |
| Largest baking sheet area (cm)                              | 1290           |
| Inverter technology   | -              |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | -              |
| Total connected loading (watts)                             | 3600           |
| Cable length (cm)   | 120            |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |                |
| hotairGentle / Conventional gentle                          | ■ / -          |
| Full width / Centre surface grill                           | ■ / -          |
| Hot air grilling / Pizza Setting                            | ■ / ■          |
| Conventional top & bottom heating                           | ■              |
| Bottom heat / Intensive heat                                | ■ / -          |
| Keep warm / Plate warming                                   | - / -          |
| Low temperature cooking                                     | ■              |
| Dehydrate   | -              |
| <b>STANDARD ACCESSORIES</b>                                 |                |
| Full width enamelled pan / wire shelves                     | 1 / 2          |
| Steam trays   | -              |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

<sup>2</sup> Measured in accordance with EN50304; 65/2014

Single ovens with lightControl  
illuminated dial specifications

| APPLIANCE TYPE  | PYROLYTIC OVEN | PYROLYTIC OVEN | OVEN WITH ECOCLEAN PLUS | OVEN WITH ECOCLEAN |
|---|----------------|----------------|-------------------------|--------------------|
| <b>Display family</b>                                       | <b>iQ 500</b>  | <b>iQ 500</b>  | <b>iQ 500</b>           | <b>iQ 500</b>      |
| Model Number  | HB578G550B     | HB578A050B     | HB458GCB0B              | HB535A050B         |
| TFT touchDisplay Plus                                       | -              | -              | -                       | -                  |
| TFT touchDisplay  | -              | -              | -                       | -                  |
| TFT Display   | -              | -              | -                       | -                  |
| lightControl illuminated dials                              | ■              | ■              | ■                       | ■                  |
| <b>KEY FEATURES</b>   |                |                |                         |                    |
| Home Connect  | -              | -              | -                       | -                  |
| varioSpeed  | -              | -              | -                       | -                  |
| coolStart   | ■              | ■              | ■                       | -                  |
| Fast pre-heating function                                   | ■              | ■              | ■                       | ■                  |
| cookControl Plus  | -              | -              | -                       | -                  |
| cookControl   | 30             | 30             | 30                      | 10                 |
| roastingSensor Plus   | -              | -              | -                       | -                  |
| roastingSensor  | ■              | -              | ■                       | -                  |
| bakingSensor Plus   | -              | -              | -                       | -                  |
| fullSteam   | -              | -              | -                       | -                  |
| pulseSteam  | -              | -              | -                       | -                  |
| Cleaning and de-scaling                                     | -              | -              | -                       | -                  |
| Drying programme  | -              | -              | -                       | -                  |
| Electronic control  | ■              | ■              | ■                       | -                  |
| Sabbath setting   | ■              | ■              | ■                       | -                  |
| activeClean® pyrolytic oven cleaning                        | ■              | ■              | -                       | -                  |
| Back / roof / side ecoClean® Direct liners                  | - / - / -      | - / - / -      | ■ / ■ / ■               | ■ / - / -          |
| 4D hotAir cooking   | -              | -              | -                       | -                  |
| 3D hotAir cooking   | ■              | -              | ■                       | ■                  |
| Telescopic rails  | 1 x clip rail  | 1 x clip rail  | -                       | 1 x clip rail      |
| softMove door opening and closing                           | softClose      | -              | softClose               | -                  |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |                |                |                         |                    |
| Oven capacity <sup>2</sup> (litres)                         | 71             | 71             | 71                      | 71                 |
| Energy efficiency class <sup>2</sup>                        | A              | A              | A                       | A                  |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | 0.81           | 0.81           | 0.81                    | 0.81               |
| Energy consumption conventional (kWh) <sup>2</sup>          | 0.99           | 0.99           | 0.99                    | 0.99               |
| Time to cook standard load (mins)                           | 50             | 50             | 50                      | 44                 |
| Largest baking sheet area (cm)                              | 1290           | 1290           | 1290                    | 1290               |
| Inverter technology   | -              | -              | -                       | -                  |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | -              | -              | -                       | -                  |
| Total connected loading (watts)                             | 3600           | 3600           | 3600                    | 3600               |
| Cable length (cm)   | 120            | 120            | 120                     | 120                |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |                |                |                         |                    |
| hotairGentle / Conventional gentle                          | ■ / -          | ■ / -          | ■ / -                   | ■ / -              |
| Full width / Centre surface grill                           | ■ / -          | ■ / -          | ■ / -                   | ■ / -              |
| Hot air grilling / Pizza Setting                            | ■ / ■          | ■ / ■          | ■ / ■                   | ■ / -              |
| Conventional top & bottom heating                           | ■              | ■              | ■                       | ■                  |
| Bottom heat / Intensive heat                                | ■ / -          | ■ / -          | ■ / -                   | -                  |
| Keep warm / Plate warming                                   | - / -          | - / -          | - / -                   | - / -              |
| Low temperature cooking                                     | ■              | ■              | ■                       | -                  |
| Dehydrate   | -              | -              | -                       | -                  |
| <b>STANDARD ACCESSORIES</b>                                 |                |                |                         |                    |
| Full width enamelled pan / wire shelves                     | 1 / 2          | 1 / 2          | 1 / 2                   | 1 / 2              |
| Steam trays   | -              | -              | -                       | -                  |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

<sup>2</sup> Measured in accordance with EN50304; 65/2014

# Double ovens

with lightControl illuminated dials

## iQ 500 MB578G5S0B

Single oven with activeClean®  
Black, stainless steel



**2**  
Year Warranty



Double ovens with lightControl illuminated dial specifications

| APPLIANCE TYPE                         | BUILT-IN                                      |           |
|--|---|-----------|
|  | iQ 500  |           |
| Display family                         | iQ 500  |           |
| Model number                           | MB578G5S0B                                    |           |
| lightControl illuminated dials         | ■   |           |
| KEY FEATURES                           | MAIN  | 2ND       |
| coolStart                              | ■   | -         |
| Fast pre-heating function              | ■   | -         |
| cookControl                            | 30  | -         |
| roastingSensor                         | ■   | -         |
| Electronic control                     | ■   | ■         |
| Sabbath setting                        | ■   | ■         |
| activeClean® pyrolytic oven cleaning   | ■   | ■         |
| Back / roof / side ecoClean® liners    | - / - / -                                     | - / - / - |
| 3D hotAir cooking                      | ■   | -         |
| Telescopic rails                       | 1 x clip rail                                 | -         |
| softClose door                         | ■   | -         |
| PERFORMANCE / TECHNICAL INFORMATION    | MAIN  | 2ND       |
| Oven capacity <sup>1</sup> (litres)    | 71  | 34        |
| Energy efficiency class <sup>1,2</sup> | A   | B         |
| Energy consumption 4D hotAir (kWh)     | 0.81  | -         |
| Energy consumption conventional (kWh)  | 0.97  | 0.83      |
| Time to cook standard load (mins)      | 44  | 45        |
| Largest baking sheet area (cm)         | 1290  | 1290      |
| Total connected loading (W)            | 6300  |           |
| Cable length (cm)                      | -   |           |
| ADDITIONAL PROGRAMMES / FUNCTIONS      | MAIN  | 2ND       |
| hotairGentle                           | ■   | -         |
| 3D hotAir cooking                      | ■   | -         |
| Full width / centre surface grill      | ■ / -   | ■ / ■     |
| Hot air grilling / Pizza Setting       | ■ / ■   | -         |
| Conventional top & bottom heating      | ■   | ■         |
| Bottom heat                            | ■   | ■         |
| Low temperature cooking                | ■   | -         |
| STANDARD ACCESSORIES                   | Full width enamelled pan / wire shelves 1 / 3 |           |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> Measured according norm EN 50304: 2014 update 65/2014 (models that are steam only or including microwave net subject to legislation).

<sup>2</sup> A+++ = more efficient, D = less efficient.



Double ovens with lightControl illuminated dial specifications

| APPLIANCE TYPE                         | BUILT-IN                                      |           | BUILT-IN                                      |           | BUILT-UNDER                                   |           |
|--|---|-----------|---|-----------|---|-----------|
|  | iQ 500  |           | iQ 500  |           | iQ 500  |           |
| Display family                         | iQ 500  |           | iQ 500  |           | iQ 500  |           |
| Model number                           | MB557G5S0B                                    |           | MB535A0S0B                                    |           | NB535ABS0B                                    |           |
| lightControl illuminated dials         | ■   |           | ■   |           | ■   |           |
| KEY FEATURES                           | MAIN  | 2ND       | MAIN  | 2ND       | MAIN  | 2ND       |
| coolStart                              | -   | -         | -   | -         | -   | -         |
| Fast pre-heating function              | ■   | -         | ■   | -         | ■   | -         |
| cookControl                            | 10  | -         | 10  | -         | -   | -         |
| roastingSensor                         | ■   | -         | -   | -         | -   | -         |
| Electronic control                     | -   | -         | -   | -         | -   | -         |
| Sabbath setting                        | -   | -         | -   | -         | -   | -         |
| activeClean® pyrolytic oven cleaning   | -   | -         | -   | -         | -   | -         |
| Back / roof / side ecoClean® liners    | ■ / ■ / ■                                     | ■ / ■ / ■ | ■ / - / -                                     | ■ / ■ / ■ | ■ / - / -                                     | ■ / ■ / ■ |
| 3D hotAir cooking                      | ■   | -         | ■   | -         | ■   | -         |
| Telescopic rails                       | 1 x clip rail                                 | -         | 1 x clip rail                                 | -         | -   | -         |
| softClose door                         | ■   | -         | -   | -         | -   | -         |
| PERFORMANCE / TECHNICAL INFORMATION    | MAIN  | 2ND       | MAIN  | 2ND       | MAIN  | 2ND       |
| Oven capacity <sup>1</sup> (litres)    | 71  | 34        | 71  | 34        | 47  | 34        |
| Energy efficiency class <sup>1,2</sup> | A   | B         | A   | B         | A   | B         |
| Energy consumption 4D hotAir (kWh)     | 0.81  | -         | 0.81  | -         | 0.71  | -         |
| Energy consumption conventional (kWh)  | 0.97  | 0.83      | 0.97  | 0.83      | 0.80  | 0.83      |
| Time to cook standard load (mins)      | 44  | 45        | 44  | 45        | 45  | 45        |
| Largest baking sheet area (cm)         | 1290  | 1290      | 1290  | 1290      | 1290  | 1290      |
| Total connected loading (W)            | 6200  |           | 6200  |           | 5600  |           |
| Cable length (cm)                      | -   |           | -   |           | -   |           |
| ADDITIONAL PROGRAMMES / FUNCTIONS      | MAIN  | 2ND       | MAIN  | 2ND       | MAIN  | 2ND       |
| hotairGentle                           | ■   | -         | ■   | -         | ■   | -         |
| 3D hotAir cooking                      | ■   | -         | ■   | -         | ■   | -         |
| Full width / centre surface grill      | ■ / -   | ■ / ■     | ■ / -   | ■ / ■     | ■ / -   | ■ / ■     |
| Hot air grilling / Pizza Setting       | ■ / ■   | -         | ■   | -         | ■   | -         |
| Conventional top & bottom heating      | ■   | ■         | ■   | ■         | ■   | ■         |
| Bottom heat                            | ■   | ■         | -   | ■         | -   | ■         |
| Low temperature cooking                | -   | -         | -   | -         | -   | -         |
| STANDARD ACCESSORIES                   | Full width enamelled pan / wire shelves 1 / 3 |           | Full width enamelled pan / wire shelves 1 / 3 |           | Full width enamelled pan / wire shelves 1 / 2 |           |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> Measured according norm EN 50304: 2014 update 65/2014 (models that are steam only or including microwave net subject to legislation).

<sup>2</sup> A+++ = more efficient, D = less efficient.

# Compact ovens

with TFT touchDisplay Plus

## iQ 700 CN878G4B6B

Compact pyrolytic oven with integral microwave blackSteel



2 Year Warranty



studioLine

### Compact ovens with TFT touchDisplay Plus specifications

| APPLIANCE TYPE  | PYROLYTIC OVEN WITH INTEGRAL MICROWAVE |
|---|--|
| <b>Design family</b>  | <b>iQ 700</b>                          |
| Model number  | CN878G4B6B                             |
| TFT touchDisplay Plus                                       | ■                                      |
| TFT touchDisplay  | -                                      |
| TFT Display   | -                                      |
| lightControl illuminated dials                              | -                                      |
| <b>KEY FEATURES</b>   |  |
| Home Connect  | ■                                      |
| varioSpeed  | ■                                      |
| coolStart   | ■                                      |
| Fast pre-heating function                                   | ■                                      |
| cookControl Plus  | ■                                      |
| cookControl   | -                                      |
| roastingSensor Plus   | ■                                      |
| bakingSensor Plus   | ■                                      |
| fullSteam   | -                                      |
| pulseSteam  | ■                                      |
| Cleaning and de-scaling                                     | ■                                      |
| Drying programme  | ■                                      |
| Electronic control  | ■                                      |
| Sabbath setting   | ■                                      |
| activeClean® pyrolytic oven cleaning                        | ■                                      |
| Back / roof / side ecoClean® Direct liners                  | - / - / -                              |
| hotAir cooking  | ■                                      |
| Telescopic rails  | 1 Level                                |
| softMove door opening and closing                           | ■                                      |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |  |
| Oven capacity <sup>2</sup> (litres)                         | 45                                     |
| Energy efficiency class <sup>2</sup>                        | -                                      |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | -                                      |
| Energy consumption conventional (kWh) <sup>2</sup>          | -                                      |
| Time to cook standard load (mins)                           | -                                      |
| Largest baking sheet area (cm)                              | 1290                                   |
| Inverter technology   | ■                                      |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | 900 / 5                                |
| Total connected loading (watts)                             | 3600                                   |
| Cable length (cm)   | 150                                    |
| Water tank capacity (litres)                                | 1.0                                    |
| Turntable diameter (mm)                                     | -                                      |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |  |
| hotairGentle / Conventional gentle                          | ■ / ■                                  |
| Full width surface grill / Centre surface grill             | ■ / ■                                  |
| Hot air grilling / Pizza Setting                            | ■ / ■                                  |
| Conventional  | ■                                      |
| Bottom heat / Intensive heat                                | ■ / ■                                  |
| Keep warm / Plate warming                                   | ■ / ■                                  |
| Low temperature cooking                                     | ■                                      |
| Dehydrate   | ■                                      |
| <b>STANDARD ACCESSORIES</b>                                 |  |
| Full width enamelled pan / wire shelves                     | 1 / 2                                  |
| Steam trays   | -                                      |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

<sup>2</sup> Measured in accordance with EN50304; 65/2014



### Compact ovens with TFT touchDisplay Plus specifications

| APPLIANCE TYPE  | PYROLYTIC OVEN WITH INTEGRAL MICROWAVE | PYROLYTIC OVEN WITH INTEGRAL MICROWAVE | STEAM COMBINATION OVEN |
|---|--|--|------------------------|
| <b>Design family</b>  | <b>iQ 700</b>                          | <b>iQ 700</b>                          | <b>iQ 700</b>          |
| Model number  | CM878G4B6B                             | CM678G4S6B                             | CS858GRB7B             |
| TFT touchDisplay Plus                                       | ■                                      | ■                                      | ■                      |
| TFT touchDisplay  | -                                      | -                                      | -                      |
| TFT Display   | -                                      | -                                      | -                      |
| lightControl illuminated dials                              | -                                      | -                                      | -                      |
| <b>KEY FEATURES</b>   |  |  |                        |
| Home Connect  | ■                                      | ■                                      | ■                      |
| varioSpeed  | ■                                      | ■                                      | -                      |
| coolStart   | ■                                      | ■                                      | ■                      |
| Fast pre-heating function                                   | ■                                      | ■                                      | ■                      |
| cookControl Plus  | ■                                      | ■                                      | ■                      |
| cookControl   | -                                      | -                                      | -                      |
| roastingSensor Plus   | ■                                      | ■                                      | ■                      |
| bakingSensor Plus   | ■                                      | ■                                      | ■                      |
| fullSteam   | -                                      | -                                      | ■                      |
| pulseSteam  | -                                      | -                                      | ■                      |
| Cleaning and de-scaling                                     | -                                      | -                                      | ■                      |
| Drying programme  | -                                      | -                                      | ■                      |
| Electronic control  | ■                                      | ■                                      | ■                      |
| Sabbath setting   | ■                                      | ■                                      | ■                      |
| activeClean® pyrolytic oven cleaning                        | ■                                      | ■                                      | -                      |
| Back / roof / side ecoClean® Direct liners                  | - / - / -                              | - / - / -                              | ■ / ■ / ■              |
| hotAir cooking  | ■                                      | ■                                      | ■                      |
| Telescopic rails  | 1 Level                                | 1 Level                                | 1 Level                |
| softMove door opening and closing                           | ■                                      | ■                                      | ■                      |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |  |  |                        |
| Oven capacity <sup>2</sup> (litres)                         | 45                                     | 45                                     | 47                     |
| Energy efficiency class <sup>2</sup>                        | -                                      | -                                      | A+                     |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | -                                      | -                                      | 0.61                   |
| Energy consumption conventional (kWh) <sup>2</sup>          | -                                      | -                                      | 0.73                   |
| Time to cook standard load (mins)                           | -                                      | -                                      | 41                     |
| Largest baking sheet area (cm)                              | 1290                                   | 1290                                   | 1290                   |
| Inverter technology   | ■                                      | ■                                      | -                      |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | 900 / 5                                | 900 / 5                                | -                      |
| Total connected loading (watts)                             | 3600                                   | 3600                                   | 3300                   |
| Cable length (cm)   | 150                                    | 150                                    | 150                    |
| Water tank capacity (litres)                                | -                                      | -                                      | 1.0                    |
| Turntable diameter (mm)                                     | -                                      | -                                      | -                      |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |  |  |                        |
| hotairGentle / Conventional gentle                          | ■ / ■                                  | ■ / ■                                  | ■ / ■                  |
| Full width surface grill / Centre surface grill             | ■ / ■                                  | ■ / ■                                  | ■ / ■                  |
| Hot air grilling / Pizza Setting                            | ■ / ■                                  | ■ / ■                                  | ■ / ■                  |
| Conventional  | ■                                      | ■                                      | ■                      |
| Bottom heat / Intensive heat                                | ■ / ■                                  | ■ / ■                                  | ■ / ■                  |
| Keep warm / Plate warming                                   | ■ / ■                                  | ■ / ■                                  | ■ / ■                  |
| Low temperature cooking                                     | ■                                      | ■                                      | ■                      |
| Dehydrate   | ■                                      | ■                                      | ■                      |
| <b>STANDARD ACCESSORIES</b>                                 |  |  |                        |
| Full width enamelled pan / wire shelves                     | 1 / 2                                  | 1 / 2                                  | 1 / 1 + pizza pan      |
| Steam trays   | -                                      | -                                      | 2                      |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

<sup>2</sup> Measured in accordance with EN50304; 65/2014

# Compact ovens

with TFT touchDisplay

## iQ 700 CM676GBS6B

Compact pyrolytic oven with integral microwave  
Black, stainless steel



2  
Year Warranty



### Compact ovens with TFT touchDisplay specifications

| APPLIANCE TYPE  | PYROLYTIC OVEN WITH INTEGRAL MICROWAVE |
|---|--|
| <b>Design family</b>  | <b>iQ 700</b>                          |
| Model Number  | CM676GBS6B                             |
| TFT touchDisplay Plus                                       | -                                      |
| TFT touchDisplay  | ■                                      |
| TFT Display   | -                                      |
| lightControl illuminated dials                              | -                                      |
| <b>KEY FEATURES</b>   |  |
| Home Connect  | ■                                      |
| varioSpeed  | ■                                      |
| coolStart   | ■                                      |
| Fast pre-heating function                                   | ■                                      |
| cookControl Plus  | ■                                      |
| cookControl   | -                                      |
| roastingSensor Plus   | -                                      |
| bakingSensor Plus   | -                                      |
| fullSteam   | -                                      |
| pulseSteam  | -                                      |
| Cleaning and de-scaling                                     | -                                      |
| Drying programme  | -                                      |
| Electronic control  | ■                                      |
| Sabbath setting   | ■                                      |
| activeClean® pyrolytic oven cleaning                        | -                                      |
| Back / roof / side ecoClean® Direct liners                  | - / - / -                              |
| hotAir cooking  | ■                                      |
| Telescopic rails  | -                                      |
| softMove door opening and closing                           | ■                                      |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |  |
| Oven capacity <sup>2</sup> (litres)                         | 45                                     |
| Energy efficiency class <sup>2</sup>                        | -                                      |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | -                                      |
| Energy consumption conventional (kWh) <sup>2</sup>          | -                                      |
| Time to cook standard load (mins)                           | -                                      |
| Largest baking sheet area (cm)                              | 1290                                   |
| Inverter technology   | ■                                      |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | 900 / 5                                |
| Total connected loading (watts)                             | 3600                                   |
| Cable length (cm)   | 150                                    |
| Water tank capacity (litres)                                | -                                      |
| Turntable diameter (mm)                                     | -                                      |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |  |
| hotairGentle / Conventional gentle                          | ■ / ■                                  |
| Full width surface grill / Centre surface grill             | ■ / ■                                  |
| Hot air grilling / Pizza Setting                            | ■ / ■                                  |
| Conventional  | ■                                      |
| Bottom heat / Intensive heat                                | ■ / -                                  |
| Keep warm / Plate warming                                   | ■ / ■                                  |
| Low temperature cooking                                     | ■                                      |
| Dehydrate   | -                                      |
| <b>STANDARD ACCESSORIES</b>                                 |  |
| Full width enamelled pan / wire shelves                     | 1 / 1                                  |
| Steam trays   | -                                      |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

<sup>2</sup> Measured in accordance with EN50304; 65/2014



### Compact ovens with TFT touchDisplay specifications

| APPLIANCE TYPE  | OVEN WITH INTEGRAL MICROWAVE | STEAM COMBINATION OVEN |
|---|------------------------------|------------------------|
| <b>Design family</b>  | <b>iQ 700</b>                | <b>iQ 700</b>          |
| Model Number  | CM656GBS6B                   | CS656GBS7B             |
| TFT touchDisplay Plus                                       | -                            | -                      |
| TFT touchDisplay  | ■                            | ■                      |
| TFT Display   | -                            | -                      |
| lightControl illuminated dials                              | -                            | -                      |
| <b>KEY FEATURES</b>   |                              |                        |
| Home Connect  | ■                            | ■                      |
| varioSpeed  | ■                            | -                      |
| coolStart   | ■                            | ■                      |
| Fast pre-heating function                                   | ■                            | ■                      |
| cookControl Plus  | ■                            | ■                      |
| cookControl   | -                            | -                      |
| roastingSensor Plus   | -                            | -                      |
| bakingSensor Plus   | -                            | -                      |
| fullSteam   | -                            | ■                      |
| pulseSteam  | -                            | ■                      |
| Cleaning and de-scaling                                     | -                            | ■                      |
| Drying programme  | -                            | ■                      |
| Electronic control  | ■                            | ■                      |
| Sabbath setting   | ■                            | ■                      |
| activeClean® pyrolytic oven cleaning                        | -                            | -                      |
| Back / roof / side ecoClean® Direct liners                  | ■ / ■ / ■                    | ■ / ■ / ■              |
| hotAir cooking  | ■                            | ■                      |
| Telescopic rails  | -                            | 1 Level                |
| softMove door opening and closing                           | ■                            | ■                      |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |                              |                        |
| Oven capacity <sup>2</sup> (litres)                         | 45                           | 47                     |
| Energy efficiency class <sup>2</sup>                        | -                            | A+                     |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | -                            | 0.61                   |
| Energy consumption conventional (kWh) <sup>2</sup>          | -                            | 0.73                   |
| Time to cook standard load (mins)                           | -                            | 41                     |
| Largest baking sheet area (cm)                              | 1290                         | 1290                   |
| Inverter technology   | ■                            | -                      |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | 900 / 5                      | -                      |
| Total connected loading (watts)                             | 3600                         | 3300                   |
| Cable length (cm)   | 150                          | 150                    |
| Water tank capacity (litres)                                | -                            | 1.0                    |
| Turntable diameter (mm)                                     | -                            | -                      |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |                              |                        |
| hotairGentle / Conventional gentle                          | ■ / ■                        | ■ / ■                  |
| Full width surface grill / Centre surface grill             | ■ / ■                        | ■ / ■                  |
| Hot air grilling / Pizza Setting                            | ■ / ■                        | ■ / ■                  |
| Conventional  | ■                            | ■                      |
| Bottom heat / Intensive heat                                | ■ / -                        | ■ / -                  |
| Keep warm / Plate warming                                   | ■ / ■                        | ■ / ■                  |
| Low temperature cooking                                     | ■                            | ■                      |
| Dehydrate   | -                            | with Steam             |
| <b>STANDARD ACCESSORIES</b>                                 |                              |                        |
| Full width enamelled pan / wire shelves                     | 1 / 1                        | 1 / 1                  |
| Steam trays   | -                            | 3                      |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

<sup>2</sup> Measured in accordance with EN50304; 65/2014



# Compact ovens

with TFT Display

## iQ 700 CM633GBS1B

Compact oven with integral microwave  
Black, stainless steel



2  
Year Warranty



### Compact ovens with TFT Display specifications



| APPLIANCE TYPE  | OVEN WITH INTEGRAL MICROWAVE |
|---|------------------------------|
| Design family   | iQ 700                       |
| Model number  | CM633GBS1B                   |
| TFT touchDisplay Plus                                       | -                            |
| TFT touchDisplay  | -                            |
| TFT Display   | ■                            |
| lightControl illuminated dials                              | -                            |
| <b>KEY FEATURES</b>   |                              |
| Home Connect  | -                            |
| varioSpeed  | -                            |
| coolStart   | -                            |
| Fast pre-heating function                                   | ■                            |
| cookControl Plus  | -                            |
| cookControl   | 14                           |
| roastingSensor Plus   | -                            |
| bakingSensor Plus   | -                            |
| fullSteam   | -                            |
| pulseSteam  | -                            |
| Cleaning and de-scaling                                     | -                            |
| Drying programme  | -                            |
| Electronic control  | ■                            |
| Sabbath setting   | ■                            |
| activeClean® pyrolytic oven cleaning                        | -                            |
| Back / roof / side ecoClean® Direct liners                  | - / - / -                    |
| hotAir cooking  | ■                            |
| Telescopic rails  | -                            |
| softMove door opening and closing                           | ■                            |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |                              |
| Oven capacity <sup>2</sup> (litres)                         | 45                           |
| Energy efficiency class <sup>2</sup>                        | -                            |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | -                            |
| Energy consumption conventional (kWh) <sup>2</sup>          | -                            |
| Time to cook standard load (mins)                           | -                            |
| Largest baking sheet area (cm)                              | 1290                         |
| Inverter technology   | ■                            |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | 900 / 5                      |
| Total connected loading (watts)                             | 3600                         |
| Cable length (cm)   | 150                          |
| Water tank capacity (litres)                                | -                            |
| Turntable diameter (mm)                                     | -                            |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |                              |
| hotairGentle / Conventional gentle                          | ■ / -                        |
| Full width surface grill / Centre surface grill             | ■ / ■                        |
| Hot air grilling / Pizza Setting                            | ■ / -                        |
| Conventional  | -                            |
| Bottom heat / Intensive heat                                | -                            |
| Keep warm / Plate warming                                   | - / ■                        |
| Low temperature cooking                                     | -                            |
| Dehydrate   | -                            |
| <b>STANDARD ACCESSORIES</b>                                 |                              |
| Full width enamelled pan / wire shelves                     | 1 / 1                        |
| Steam trays   | -                            |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup>For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

<sup>2</sup>Measured in accordance with EN50304; 65/2014

### Compact ovens with TFT Display specifications



| APPLIANCE TYPE  | MICROWAVE  | STEAMER     |
|---|------------|-------------|
| Design family   | iQ 700     | iQ 700      |
| Model number  | CF634AGS1B | CD634GAS08* |
| TFT touchDisplay Plus                                       | -          | -           |
| TFT touchDisplay  | -          | -           |
| TFT Display   | ■          | ■           |
| lightControl illuminated dials                              | -          | -           |
| <b>KEY FEATURES</b>   |            |             |
| Home Connect  | -          | -           |
| varioSpeed  | -          | -           |
| coolStart   | -          | -           |
| Fast pre-heating function                                   | -          | -           |
| cookControl Plus  | -          | -           |
| cookControl   | 7          | 20          |
| roastingSensor Plus   | -          | -           |
| bakingSensor Plus   | -          | -           |
| fullSteam   | -          | ■           |
| pulseSteam  | -          | -           |
| Cleaning and de-scaling                                     | -          | -           |
| Drying programme  | -          | -           |
| Electronic control  | ■          | ■           |
| Sabbath setting   | ■          | ■           |
| activeClean® pyrolytic oven cleaning                        | -          | -           |
| Back / roof / side ecoClean® Direct liners                  | - / - / -  | - / - / -   |
| hotAir cooking  | -          | -           |
| Telescopic rails  | -          | -           |
| softMove door opening and closing                           | -          | ■           |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |            |             |
| Oven capacity <sup>2</sup> (litres)                         | 36         | 38          |
| Energy efficiency class <sup>2</sup>                        | -          | -           |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | -          | -           |
| Energy consumption conventional (kWh) <sup>2</sup>          | -          | -           |
| Time to cook standard load (mins)                           | -          | -           |
| Largest baking sheet area (cm)                              | 1290       | -           |
| Inverter technology   | ■          | -           |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | 900 / 5    | -           |
| Total connected loading (watts)                             | 1220       | 1900        |
| Cable length (cm)   | 150        | 150         |
| Water tank capacity (litres)                                | -          | 1.3         |
| Turntable diameter (mm)                                     | -          | -           |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |            |             |
| hotairGentle / Conventional gentle                          | -          | -           |
| Full width surface grill / Centre surface grill             | - / -      | - / -       |
| Hot air grilling / Pizza Setting                            | -          | -           |
| Conventional  | -          | -           |
| Bottom heat / Intensive heat                                | -          | -           |
| Keep warm / Plate warming                                   | - / -      | - / -       |
| Low temperature cooking                                     | -          | -           |
| Dehydrate   | -          | with Steam  |
| <b>STANDARD ACCESSORIES</b>                                 |            |             |
| Full width enamelled pan / wire shelves                     | Glass pan  | 1 / 1       |
| Steam trays   | -          | 2           |

■ Yes, model has this feature. - Feature not available for this model.

\* Replaces CD634GAS1B from Autumn 2019

<sup>1</sup>For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

<sup>2</sup>Measured in accordance with EN50304; 65/2014

# Compact ovens

with lightControl illuminated dials

## iQ 500 CP465AGB0B

Compact oven with microwave and steam combination  
blackSteel



2  
Year Warranty



studioLine

### Compact ovens with lightControl illuminated dials specifications

| APPLIANCE TYPE  | MICROWAVE COMBINATION WITH STEAM |
|---|----------------------------------|
| <b>Design family</b>  | <b>iQ 500</b>                    |
| Model number  | CP465AGB0B                       |
| TFT touchDisplay Plus                                       | -                                |
| TFT touchDisplay  | -                                |
| TFT Display   | -                                |
| lightControl illuminated dials                              | ■                                |
| <b>KEY FEATURES</b>   |                                  |
| Home Connect  | -                                |
| varioSpeed  | ■                                |
| coolStart   | -                                |
| Fast pre-heating function                                   | ■                                |
| cookControl Plus  | -                                |
| cookControl   | 30                               |
| roastingSensor Plus   | -                                |
| bakingSensor Plus   | -                                |
| fullSteam   | ■                                |
| pulseSteam  | Added Steam                      |
| Cleaning and de-scaling                                     | ■                                |
| Drying programme  | ■                                |
| Electronic control  | ■                                |
| Sabbath setting   | ■                                |
| activeClean® pyrolytic oven cleaning                        | -                                |
| Back / roof / side ecoClean® Direct liners                  | ■ / - / -                        |
| hotAir cooking  | ■                                |
| Telescopic rails  | -                                |
| softMove door opening and closing                           | -                                |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |                                  |
| Oven capacity <sup>2</sup> (litres)                         | 36                               |
| Energy efficiency class <sup>2</sup>                        | -                                |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | -                                |
| Energy consumption conventional (kWh) <sup>2</sup>          | -                                |
| Time to cook standard load (mins)                           | -                                |
| Largest baking sheet area (cm)                              | -                                |
| Inverter technology   | ■                                |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | 1000 / 5                         |
| Total connected loading (watts)                             | 3100                             |
| Cable length (cm)   | 150                              |
| Water tank capacity (litres)                                | 0.80                             |
| Turntable diameter (mm)                                     | -                                |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |                                  |
| hotairGentle / Conventional gentle                          | -                                |
| Full width surface grill / Centre surface grill             | Quartz / -                       |
| Hot air grilling / Pizza Setting                            | ■ / -                            |
| Conventional  | -                                |
| Bottom heat / Intensive heat                                | -                                |
| Keep warm / Plate warming                                   | - / -                            |
| Low temperature cooking                                     | -                                |
| Dehydrate   | -                                |
| <b>STANDARD ACCESSORIES</b>                                 |                                  |
| Full width enamelled pan / wire shelves                     | Glass tray and wire insert       |
| Steam trays   | 1                                |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

<sup>2</sup> Measured in accordance with EN50304; 65/2014



studioLine

### Compact ovens with lightControl illuminated dials specifications

| APPLIANCE TYPE  | MICROWAVE COMBINATION WITH STEAM | MICROWAVE COMBINATION  |
|---|----------------------------------|------------------------|
| <b>Design family</b>  | <b>iQ 500</b>                    | <b>iQ 500</b>          |
| Model number  | CP565AGS0B                       | CM585AMS0B             |
| TFT touchDisplay Plus                                       | -                                | -                      |
| TFT touchDisplay  | -                                | -                      |
| TFT Display   | -                                | -                      |
| lightControl illuminated dials                              | ■                                | ■                      |
| <b>KEY FEATURES</b>   |                                  |                        |
| Home Connect  | -                                | -                      |
| varioSpeed  | ■                                | ■                      |
| coolStart   | -                                | -                      |
| Fast pre-heating function                                   | ■                                | ■                      |
| cookControl Plus  | -                                | -                      |
| cookControl   | 30                               | 15                     |
| roastingSensor Plus   | -                                | -                      |
| bakingSensor Plus   | -                                | -                      |
| fullSteam   | ■                                | -                      |
| pulseSteam  | Added Steam                      | -                      |
| Cleaning and de-scaling                                     | ■                                | -                      |
| Drying programme  | ■                                | -                      |
| Electronic control  | ■                                | ■                      |
| Sabbath setting   | ■                                | ■                      |
| activeClean® pyrolytic oven cleaning                        | -                                | -                      |
| Back / roof / side ecoClean® Direct liners                  | ■ / - / -                        | - / - / -              |
| hotAir cooking  | ■                                | ■                      |
| Telescopic rails  | -                                | -                      |
| softMove door opening and closing                           | -                                | -                      |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                  |                                  |                        |
| Oven capacity <sup>2</sup> (litres)                         | 36                               | 44                     |
| Energy efficiency class <sup>2</sup>                        | -                                | -                      |
| Energy consumption 4D hotAir (kWh) <sup>2</sup>             | -                                | -                      |
| Energy consumption conventional (kWh) <sup>2</sup>          | -                                | -                      |
| Time to cook standard load (mins)                           | -                                | -                      |
| Largest baking sheet area (cm)                              | -                                | -                      |
| Inverter technology   | ■                                | -                      |
| Max. Microwave power (W) <sup>1</sup> / No. of power levels | 1000 / 5                         | 900 / 5                |
| Total connected loading (watts)                             | 3100                             | 3350                   |
| Cable length (cm)   | 150                              | 180                    |
| Water tank capacity (litres)                                | 0.80                             | -                      |
| Turntable diameter (mm)                                     | -                                | 360                    |
| <b>ADDITIONAL PROGRAMMES / FUNCTIONS</b>                    |                                  |                        |
| hotairGentle / Conventional gentle                          | -                                | -                      |
| Full width surface grill / Centre surface grill             | Quartz / -                       | ■ / -                  |
| Hot air grilling / Pizza Setting                            | ■ / -                            | ■ / -                  |
| Conventional  | -                                | -                      |
| Bottom heat / Intensive heat                                | -                                | -                      |
| Keep warm / Plate warming                                   | - / -                            | - / -                  |
| Low temperature cooking                                     | -                                | -                      |
| Dehydrate   | -                                | -                      |
| <b>STANDARD ACCESSORIES</b>                                 |                                  |                        |
| Full width enamelled pan / wire shelves                     | Glass tray and wire insert       | High grid and low grid |
| Steam trays   | 1                                | -                      |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

<sup>2</sup> Measured in accordance with EN50304; 65/2014

# Microwaves

with TFT Display / touchSlider control

## iQ700 BE634LGS1B

Microwave with grill  
Black, stainless steel



## iQ500 BF555LMS0B

Microwave with white LCD display and touchSlider control  
Black, stainless steel



### Microwaves with TFT Display specifications

| APPLIANCE TYPE                             | MICROWAVE WITH GRILL | MICROWAVE         |
|--|----------------------|-------------------|
| <b>Design family</b>                       | <b>iQ700</b>         | <b>iQ700</b>      |
| Model number                               | BE634LGS1B           | BF634LGS1B        |
| TFT Display                                | ■                    | ■                 |
| touchSlider control                        | -                    | -                 |
| <b>KEY FEATURES</b>                        |                      |                   |
| Microwave                                  | ■                    | ■                 |
| Quartz Grill                               | -                    | -                 |
| Microwave / grill combination              | ■                    | -                 |
| Electronic control                         | ■                    | ■                 |
| Sabbath setting                            | ■                    | ■                 |
| Automatic programmes – cookControl         | 10                   | 7                 |
| Stainless steel interior                   | ■                    | ■                 |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b> |                      |                   |
| Oven capacity (litres)                     | 21                   | 21                |
| Inverter technology                        | ■                    | ■                 |
| Maximum Microwave power (W) <sup>1</sup>   | 900                  | 900               |
| Number of Microwave power levels           | 5                    | 5                 |
| Microwave distribution                     | Stirrer              | Stirrer           |
| Turntable diameter (mm)                    | -                    | -                 |
| Total connected load kW                    | 1.99                 | 1.22              |
| Cable length (cm)                          | 150                  | 150               |
| GB plug                                    | ■                    | ■                 |
| Side opening door (left hinged)            | ■                    | ■                 |
| Control panel position                     | Below, horizontal    | Below, horizontal |
| Installation in wall unit / tall housing   | ■ / ■                | ■ / ■             |
| <b>STANDARD ACCESSORIES</b>                |                      |                   |
| Glass pan / Insert grid                    | 1 / 1                | -                 |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.



### Microwaves with touchSlider control specifications

| APPLIANCE TYPE                             | MICROWAVE       | MICROWAVE       |
|--|-----------------|-----------------|
| <b>Design family</b>                       | <b>iQ500</b>    | <b>iQ500</b>    |
| Model number                               | BF555LMS0B      | BF525LMS0B      |
| TFT Display                                | -               | -               |
| touchSlider control                        | ■               | ■               |
| <b>KEY FEATURES</b>                        |                 |                 |
| Microwave                                  | ■               | ■               |
| Quartz Grill                               | -               | -               |
| Microwave / grill combination              | -               | -               |
| Electronic control                         | ■               | ■               |
| Sabbath setting                            | ■               | ■               |
| Automatic programmes – cookControl         | 7               | 7               |
| Stainless steel interior                   | ■               | ■               |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b> |                 |                 |
| Oven capacity (litres)                     | 25              | 20              |
| Inverter technology                        | -               | -               |
| Maximum Microwave power (W) <sup>1</sup>   | 900             | 800             |
| Number of Microwave power levels           | 5               | 5               |
| Microwave distribution                     | Turntable       | Turntable       |
| Turntable diameter (mm)                    | 315             | 255             |
| Total connected load kW                    | 1.45            | 1.27            |
| Cable length (cm)                          | 130             | 130             |
| GB plug                                    | ■               | ■               |
| Side opening door (left hinged)            | ■               | ■               |
| Control panel position                     | Right, vertical | Right, vertical |
| Installation in wall unit / tall housing   | - / ■           | ■ / ■           |
| <b>STANDARD ACCESSORIES</b>                |                 |                 |
| Glass pan / Insert grid                    | -               | -               |


■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

# Warming drawers and accessories

## iQ 700 BI630DNS1B

Warming drawer  
Black, stainless steel



### Warming drawers specifications

|   | —                 | studioLine        | studioLine        | —                 | —                 |
|---|-------------------|-------------------|-------------------|-------------------|-------------------|
| APPLIANCE TYPE                                      | WARMING DRAWER    | VACUUM DRAWER     | WARMING DRAWER    | WARMING DRAWER    | WARMING DRAWER    |
| Model number  | BI630DNS1B        | BV830ENB1B        | BI830CNB1B        | BI630CNS1B        | BI510CNR0B        |
| Coordinates with                                    | All iQ 700 models | iQ 700 studioLine | iQ 700 studioLine | All iQ 700 models | All iQ 500 models |
| <b>KEY FEATURES &amp; FUNCTIONS</b>                 |                   |                   |                   |                   |                   |
| Operating indicator light                           | ■                 | ■                 | ■                 | ■                 | ■                 |
| Electronic control                                  | ■                 | ■                 | ■                 | ■                 | —                 |
| Sabbath setting                                     | ■                 | ■                 | ■                 | ■                 | —                 |
| Rotary temperature control dial                     | ■                 | Touch control     | ■                 | ■                 | ■                 |
| Number of temperature settings                      | 4                 | —                 | 4                 | 4                 | 3                 |
| Number of vacuum seal time settings                 | —                 | 3                 | —                 | —                 | —                 |
| Number of vacuum sealing levels – bags / containers | —                 | 3/3               | —                 | —                 | —                 |
| Glass safety lid                                    | —                 | ■                 | —                 | —                 | —                 |
| Maximum temperature (°C)                            | 80                | —                 | 80                | 80                | 80                |
| Minimum temperature (°C)                            | 40                | —                 | 40                | 40                | 40                |
| Maximum capacity – plates                           | 40                | —                 | 12                | 12                | 14                |
| Maximum capacity – espresso cups                    | 192               | —                 | 64                | 64                | 64                |
| Toughened glass base                                | ■                 | —                 | ■                 | ■                 | Anti-slip mat     |
| Vacuum Drawer                                       | —                 | ■                 | —                 | —                 | —                 |
| Plate warming                                       | ■                 | —                 | ■                 | ■                 | ■                 |
| Hold Warm   | ■                 | —                 | ■                 | ■                 | ■                 |
| Defrost   | ■                 | —                 | ■                 | ■                 | ■                 |
| Low temperature cooking                             | ■                 | —                 | ■                 | ■                 | —                 |
| <b>TECHNICAL INFORMATION</b>                        |                   |                   |                   |                   |                   |
| Install independently                               | ■                 | ■                 | ■                 | ■                 | ■                 |
| Install with compact appliance                      | iQ 700            | iQ 700 studioLine | iQ 700 studioLine | iQ 700            | iQ 500            |
| Install with a single oven                          | iQ 700            | iQ 700 studioLine | iQ 700 studioLine | iQ 700            | iQ 500            |
| Push-Pull opening mechanism                         | ■                 | ■                 | ■                 | ■                 | ■                 |
| Drawer interior volume (litres)                     | 52                | 8                 | 20                | 20                | 23                |
| Installation in a tall housing                      | ■                 | ■                 | ■                 | ■                 | ■                 |
| Installation under work surface                     | ■                 | ■                 | ■                 | ■                 | ■                 |
| Maximum weight capacity (kg)                        | 25                | 15                | 25                | 25                | 15                |
| Total connected loading (kW)                        | 0.81              | 0.32              | 0.81              | 0.81              | 0.40              |
| Cable length (in cm)                                | 150               | 150               | 150               | 150               | 150               |
| GB plug   | ■                 | ■                 | ■                 | ■                 | ■                 |
| <b>STANDARD ACCESSORIES</b>                         |                   |                   |                   |                   |                   |
| Vacuinating platform                                | —                 | ■                 | —                 | —                 | —                 |
| External vacuinating adaptor, hose & plugs          | —                 | ■                 | —                 | —                 | —                 |
| Sample vacuinating bags                             | —                 | ■                 | —                 | —                 | —                 |
| <b>OPTIONAL ACCESSORIES</b>                         |                   |                   |                   |                   |                   |
| 100 x Vacuum bags (180 x 280 mm)                    | —                 | HZ66D910          | —                 | —                 | —                 |
| 100 x Vacuum bags (240 x 350 mm)                    | —                 | HZ66D920          | —                 | —                 | —                 |




**HZ631010** Colour coordinated full width baking tray with non-stick coating for iQ700 ovens and compacts



**HZ915003** 5.4L capacity oval glass casserole dish with lid



**HZ625071** Two-piece enamelled anti-splash pan insert

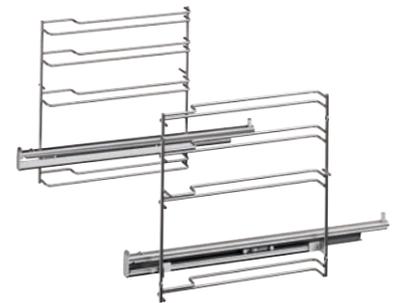

**HZ638100** 1 level telescopic rails with stop, fully extendible

## Optional accessories

### ROASTING & BAKING ACCESSORIES

|          |  | iQ700        |                    | iQ500        |               |               |
|----------|--|--------------|--------------------|--------------|---------------|---------------|
|          |  | Single Ovens | 45cm Compact Ovens | Single Ovens | Compact Ovens | Double Ovens* |
| HZ634000 | Full width wire shelf for iQ700 and iQ500 ovens and iQ700 compacts                                 | ■            | ■                  | ■            | —             | ■             |
| HZ664000 | Full width wire shelf for iQ700 ovens and compacts with fullSteam function                         | ■            | ■                  | —            | —             | —             |
| HZ631070 | Colour coordinated full width enamelled baking tray for iQ700 ovens and compact ovens              | ■            | ■                  | —            | —             | —             |
| HZ531000 | Colour coordinated full width enamelled baking tray for iQ500 ovens                                | —            | —                  | ■            | —             | ■             |
| HZ631010 | Colour coordinated full width baking tray with non-stick coating for iQ700 ovens and compacts      | ■            | ■                  | —            | —             | —             |
| HZ531010 | Colour coordinated full width baking tray with non-stick coating for iQ500 ovens                   | —            | —                  | ■            | —             | ■             |
| HZ634080 | Full width wire shelf for iQ700 ovens and compacts with integral microwave                         | ■            | ■                  | —            | —             | —             |
| HZ625071 | Two-piece enamelled anti-splash pan insert for iQ700 ovens and compact ovens and iQ500 ovens       | ■            | ■                  | ■            | —             | ■             |
| HZ636000 | Full width glass tray for iQ1700 ovens and compact ovens and iQ500 ovens                           | ■            | ■                  | ■            | —             | ■             |
| HZ865000 | Glass serving dish – approx 40 x 25cm – for iQ700 ovens and compact ovens and iQ500 ovens          | ■            | ■                  | ■            | —             | ■             |
| HZ915003 | 5.4L capacity oval glass casserole dish with lid for iQ700 ovens and compact ovens and iQ500 ovens | ■            | ■                  | ■            | —             | ■             |

### TELESCOPIC RAILS

|          |  |   |   |   |   |   |
|----------|--|---|---|---|---|---|
| HZ638100 | 1 level telescopic shelf rails with stop, fully extendible, for iQ700 ovens                                | ■ | — | — | — | — |
| HZ538000 | 1 pair of level independent ClipRail telescopic rails for iQ500 single and double ovens                    | — | — | ■ | — | ■ |
| HZ638170 | 1 level telescopic shelf rails with stop, fully extendible, for iQ700 ovens with pyrolytic cleaning        | ■ | — | — | — | — |
| HZ638D10 | 1 level telescopic shelf rails with stop, fully extendible, for iQ700 ovens with fullSteam function        | ■ | — | — | — | — |
| HZ638300 | 3 level telescopic shelf rails with stop, fully extendible for iQ700 and iQ500 single and double ovens     | ■ | — | ■ | — | ■ |
| HZ638370 | 3 level telescopic shelf rails with stop, fully extendible for iQ700 ovens with pyrolytic cleaning         | ■ | — | — | — | — |
| HZ638D30 | 3 level telescopic shelf rails with stop, fully extendible for iQ700 ovens with fullSteam function         | ■ | — | — | — | — |
| HZ638178 | 1 level telescopic shelf rails with stop, fully extendible for iQ700 compact ovens with pyrolytic cleaning | — | ■ | — | — | — |
| HZ638D18 | 1 level telescopic shelf rails with stop, fully extendible for 45cm compact ovens with fullSteam function  | — | ■ | — | — | — |

### INSTALLATION ACCESSORIES

|          |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|
| HZ6BMA00 | Metal platform and brackets suited to combinations of iQ700 60cm Single ovens and 45cm Compact ovens in column (special single aperture required) | ■ | — | — | — | — |
| HZ66X600 | Cosmetic decor strip for use between 60cm single and 45cm compact ovens   | ■ | — | — | ■ | — |

■ Yes, model has this feature. – Feature not available for this model.

\*Main cavity only

Please note: optional accessories not suited for use during pyrolytic cleaning unless stated

# Induction, ceramic and gas hobs. Designed to impress.

The Siemens hob range combines stunning design with innovative technology and ergonomic design.

Create a design statement in your kitchen to work in harmony with other Siemens Home appliances. With hob options including distinctive black glass, cooking sensors and Wi-Fi, there are a range of collections including induction, ceramic and gas to choose from.

The advanced technology available in our hobs ensures your cooking is as enjoyable as possible, with time-saving features that help you to quickly and effortlessly prepare dishes. With a wide range of styles, sizes and cooking types to suit your needs and kitchen design, there are plenty of hob solutions to choose from.

Siemens hob warranties:

**2** Year Warranty  
A Two Year Warranty is available on all Siemens hobs listed in this brochure to protect against manufacturing and material faults during this warranty period.

To find out more about your warranty and for registration please refer to page 179.

Model shown: EX875LX34E 80cm inductionAir glass hob



# Introducing the Siemens hob collection.

With intelligent technology, elegant design aesthetic and practical yet impressive functionality, Siemens hobs bring excitement and ease when creating dishes.



Model shown: E875KYW1E flexinduction hob

## Induction cooking



### inductionAir venting hobs

The inductionAir venting hob gives you the freedom to design your kitchen how you want to, with the added benefit of hassle-free cleaning. The innovative design means that the grease filters fit into an entirely detachable liquid tray unit which is designed to completely protect against spillages and over-boiled liquids.

Model shown: EX875LX34E (page 73)




### freeInduction Plus hob

Exclusive to studioLine our freeInduction Plus hob offers the ultimate freedom when cooking on a hob. Move up to six pots and pans freely anywhere on the hob, without being restricted to size or predefined cooking zones.

Model shown: EZ977KZY1E (page 71)

## Gas cooking

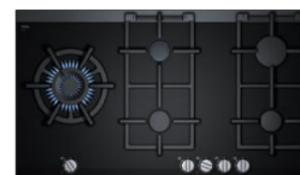

### Gas hobs

Tradition meets innovation – with their modern functions, Siemens gas hobs provide enjoyment in cooking like a pro. Low profile, single piece burners on the glass complete the sleek appearance.

Model shown: ER9A6SD70 (page 84)


## Domino cooking



### Domino hobs

Domino hobs can be installed alone or side by side with other types of compatible hobs. Domino cooking gives you more cooking options, for example the 40cm wide Teppan Yaki is ideal for combining with other Domino or faceted design cooktops to create a bespoke cooking area.

Models shown: ET475FYB1E, EX375FXB1E, ER3A6AD70, ER3A6BD70 (pages 88-89)

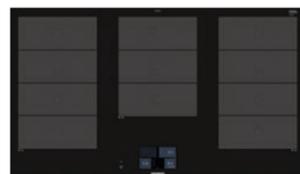

### flexInduction hobs

Siemens flexInduction hobs are a must for diverse cooking. The cooking area can be tailored to your needs, enabling you to use a small area as traditional induction hobs with four or five separate zones, for boiling rice, for example, or you can choose to link the zones together to form one zone for larger cooking pans.

With flexInduction Plus, your hob automatically knows how large your cookware is. This provides even heat with the use of an additional central zone if the hob detects that the pan is too large.

Model shown: EX975KXW1E (page 76)



### Induction hobs

Induction cooking is recognised as being one of the quickest, safest and most efficient methods of cooking available. When a pan with a ferrous or magnetic metal base is placed on the hob, the coil situated below the ceramic surface uses an electromagnetic field to create heat, almost instantly heating the pan. With only the base of the pan heated the cooking zone stays cooler.

Model shown: EH801FVB1E (page 80)

## Ceramic cooking



### quickLite hobs

The surface of a glass ceramic hob heats up quickly and conveniently, while also being easy to clean due to the smooth and even surface. The cooking zones glow red when they're on and you can adjust the temperature of the cooking zones precisely, ensured by 17 power levels. Siemens highSpeed cooking zones are also optimised for fast cooking and heat up almost instantly.

Model shown: ET875CP1D (page 82)



# Choose the perfect hob for your kitchen.

## A perfect finish suitable for any modern kitchen.

We aim to provide a wide selection of quality hob choices to ensure there is enough variety and colour-ways to choose from to match your kitchen style.



Black glass



Black ceramic glass



Black tempered glass




Stainless steel



Steel/black glass

## Perfectly framed.

When considering a hob, you may also be thinking about the look you want to create as well as matching your appliance to other Siemens products. Siemens offers a variety of finishes to the hob frame; from stand out premium steel trims to sleek flushline trims that fit neatly in line with your worktop surface.

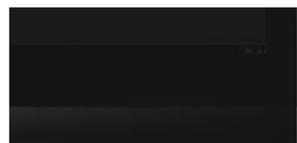

studioLine blackSteel trim




Premium steel trim



Flushline



3 sided bevel edge

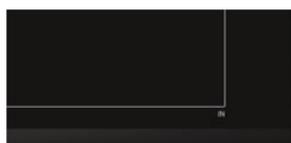

Front bevel



Frameless



## The perfect width.



Our hob range is available in a range of widths to suit your kitchen design and needs. Our choice of induction hobs come in 60, 80 and 90cm options, gas is available in 60, 75 and 90cm options and venting hobs come in an 80cm option.

## Putting your finger on innovation.



TFT touchDisplay



### TFT touchDisplay

With the innovative TFT touchDisplay, you can now get the most out of your Siemens induction hob. The full colour touch screen is intuitive and easy to use with clear information about your hob's status at all times as well as additional settings that open up a new world of possibilities. Choose the settings for each individual cooking zone and combine the zones as you like – for example, for different sizes of cookware and various accessories. Access a new world of recipes available through the display screen which can help you cook the perfect dish in just a few simple steps, complete with images and clear text. Take control of your Siemens induction hob and enjoy the advanced design with perfectly prepared meals.



Dual lightSlider



### Dual lightSlider

Operate with intuition. The dual lightSlider lets you easily select and join the cooking zones of the iQ700 Induction Hobs via one neatly arranged interface that illuminates when the hob is turned on. To adjust the power level of the cooking zones simply slide your finger along the lit scale or select the desired power level directly with precise control. When the hob is switched off, the controls are completely invisible for a sleek finish to your kitchen. As there are no protruding parts, cleaning is made even easier.




touchSlider



### touchSlider

The ergonomic touchSlider sits flush to the appliance and allows you to slide your finger across the power level scale to the desired setting, with control advances in half-levels from 1 to 9. You can also touch the desired level directly for faster adjustments to the cooking zone temperature.

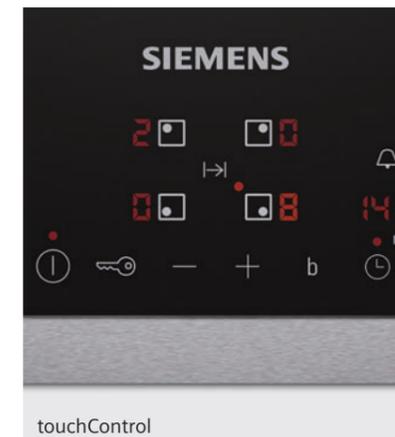

touchControl



### touchControl

Thanks to advanced touchControl technology, Siemens hobs can be operated by simply touching the surface. This means the controls are seamlessly integrated into the surface and make cleaning even easier.




frontControl dials



### frontControl

Gas hobs with frontControl feature all controls at the front of the appliance for ease of use.

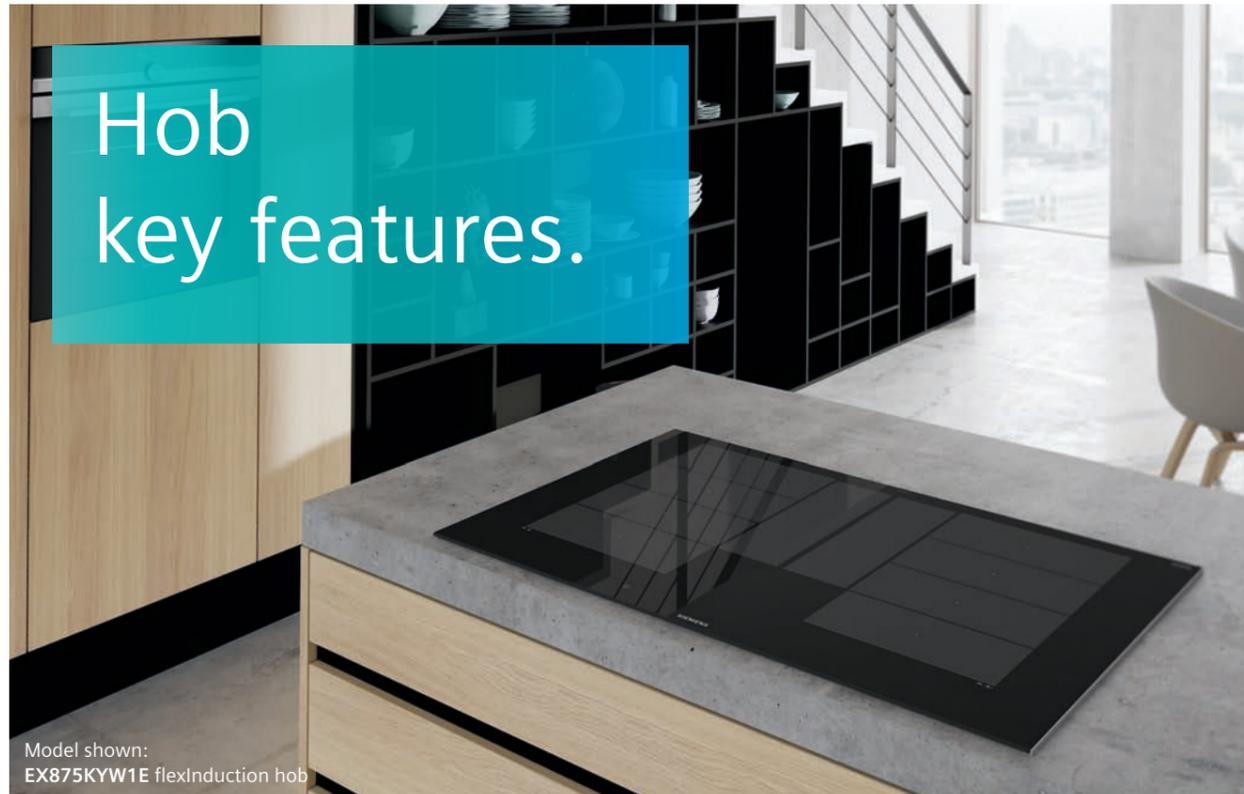

Model shown:  
EX875KYW1E flexInduction hob

## Home Connect Hobs. Designed to make life easier.

Selected freeInduction, inductionAir and flexInduction hobs are Wi-Fi enabled meaning they can be operated through the Home Connect App with other Siemens products including ovens, hoods and cooling appliances. It's also possible to use the services of different partners - turning your house into a connected home. For example use voice control with our partner Amazon Alexa to turn your hob on, or change the cooking speed. Use IFTTT to connect our Wi-Fi enabled hobs to a wider variety of partners including home lighting and music systems. Our Home Connect hobs offer you the ability to create a fully connected kitchen for convenience and smart living.

- Remote monitoring gives you an overview of your appliance's current status – from wherever you are. Have you ever left the house and had to go back and check if you turned off the hob? Peace of mind is just a click away with Wi-Fi enabled Siemens hobs and the intuitive Home Connect app. You can monitor your appliance's settings including on/off status, active cooking zones, implement child lock and get the cooking time status from wherever you are.
- Explore a wide range of recipes via the app and send the cooking and temperature settings straight to your hob. Perfect for busy evenings, find seasonal recipes and extra cooking support through the App.



### cookConnect system

Utilise this feature through the Home Connect App. Control the different functions of the extractor hood directly from your cooktop so you only have to control one appliance when cooking on your hob. From lighting to extractor speed to turning off the appliance, control every aspect of your cookConnect hood directly through your cookConnect hob. For more information see pages 66, 96 and 97.



Discover more exciting possibilities for a seamless life with Siemens and Home Connect. For more information visit [siemens-home.bsh-group.com/uk/homeconnect](https://siemens-home.bsh-group.com/uk/homeconnect)

## Discover the powerful responsiveness of Siemens induction cooking.



### fryingSensor Plus

Makes cooking easier and ensures vegetables stay firm, and fish and meat are cooked just right. Just select the programme you want, wait for the signal, add oil to the pan – and then fry at the ideal temperature. fryingSensor Plus takes control. The integrated fryingSensor Plus gives you full precision when frying by keeping the dish at the defined power level as soon as this has been reached.



### cookingSensor Plus

No more overboiling. Just attach the sensor to the pot and it will interact with the cooktop, giving a signal when a certain temperature has been reached and keeping it exactly at that level.



### Fast, safe, and easy to clean: powerInduction from Siemens

Instantly hot. Instantly cold. Experience the benefits of Siemens powerInduction. Heat is conducted directly to the pans and their contents via induction coils, without heating the hob, heat-up times are short, safety is increased and the hob is much easier to clean.



### The turbocharger for powerInduction: The powerBoost function

Increases power by up to 50%. This can save up to 35% of the time it takes to heat up pots or cook large quantities.



### powerMove Plus

Enables intuitive control thanks to three heating zones with different temperatures, just by moving the pan.



### panBoost

Enables you to heat cookware faster than when using heat setting 9. After 30 seconds, this function automatically switches itself off and reverts back to power level 9.





### Combi-Zone

Allows you to connect two induction zones together, suitable for larger pots and pans.

### Timer

With switch-off function. Safely shuts off the cooking zone when the selected cooking time expires.

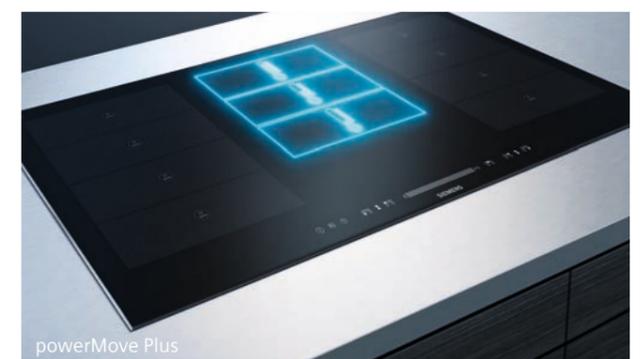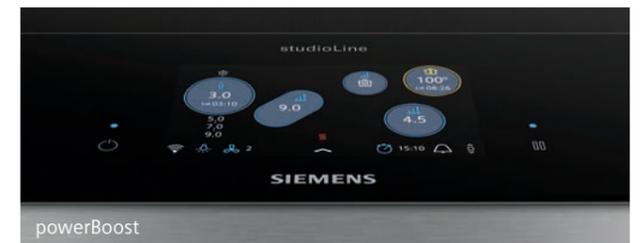

# Explore the science of Induction cooking.

Heat is instantly generated directly under the pans by the induction stove, and vanishes just as quickly when you switch it off. The ceramic glass around the pans stays cool, so if something boils over, it won't burn onto the surface.




Our best induction hob, evolved:  
inductionAir.



Model shown:  
EX875LX34E inductionAir venting hob

Combining induction technology with powerful extraction, the inductionAir hob is intelligently designed for your kitchen.

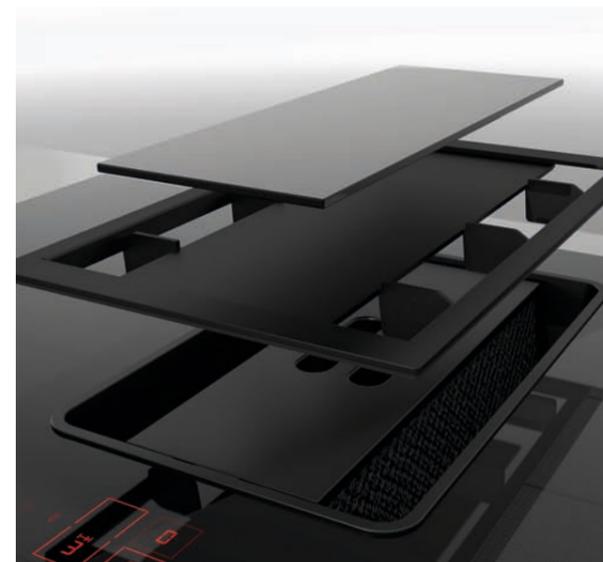

**inductionAir venting hob**

The inductionAir venting hob gives you the freedom to style your kitchen how you want to, with the added benefit of hassle-free cleaning. The innovative design means that the grease filters fit into an entirely detachable liquid tray unit which is made to completely protect against spillages and over-boiled liquids.

**How does it work?**

All parts of the inductionAir venting hob are neatly arranged in a liquid tray unit, accessed from the top of the hob. Each of the parts are dishwasher-proof, including the cast iron and black glass air inlet grid, the 2-in-1 grease filter and the liquid tray. Each part is also separate to save space in your dishwasher.

**Protects from spills**

As a first layer of protection, the cast iron and black glass air inlet grid is designed to limit the flow of liquids into the ventilation module. As a second layer of protection, the liquid tray captures up to 200ml from day-to-day cooking and can be easily discarded. As an additional layer of protection, up to 2 litres of liquid can be held in the liquid safety tank, accessed from beneath the appliance, safe-guarding the appliance from damage. This means you can focus on your cooking with complete peace of mind.

# flexInduction and induction key features.



Model shown:  
EX977LXV5E flexInduction hob

A hob that fits in with your lifestyle, flexInduction is no-compromise cooking at its best.



### flexInduction


Siemens flexInduction hobs are a must for diverse cooking. The cooking area can be tailored to your needs, enabling you to use a small area as traditional induction hobs with four or five separate zones, for boiling rice, for example, or you can choose to link the zones together to form one zone for larger cooking pans. The new extended cooking surface can accommodate pans of any size, even several pans placed anywhere on the surface at the same time. With all the advantages of induction cooking, flexInduction also includes boost settings, automatic pan recognition and touchSlider controls.

Each flexInduction zone uses four innovative elongated oval inductors beneath the glass, each of which can act independently to sense the presence of cookware on the hob. Only if cookware is detected will the individual inductors work, ensuring efficient operation whether a 10cm diameter milk pan is placed in one corner or a large griddle plate covers the whole zone. With only specific areas active at any particular time, no energy is wasted. And for an even more versatile cooking experience the newly designed triple flexInduction hob provides the ultimate in flexible cooking with three flexInduction zones, fitting in with your lifestyle. flexInduction is no-compromise cooking at its best.



### flexInduction Plus

Siemens flexInduction hobs are a must for diverse cooking. With flexInduction Plus, your hob automatically knows how large your cookware is. This provides even heat with the use of an additional central zone if the hob detects that the pan is too large. For 80cm flexInduction Plus hobs, there are two additional zones which are used for either the left or right flexInduction zones and cannot be used together. For 60cm flexInduction Plus hobs, no matter which side of the pan goes over, a central zone is automatically added.

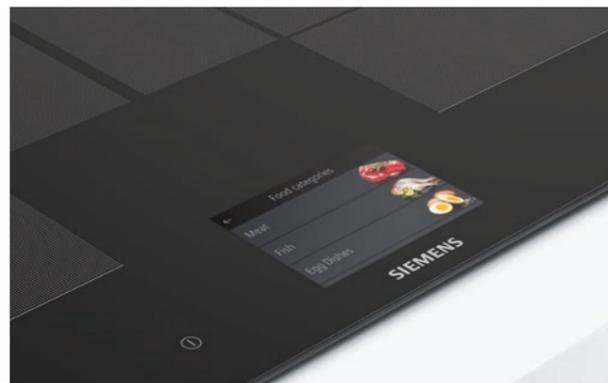

### Induction cooking – the cool heat

Induction cooking is recognised as being one of the quickest, safest and most efficient methods of cooking available.

When a pan with a ferrous or magnetic metal base is placed on the hob, the coil situated below the ceramic surface uses an electromagnetic field to create heat, almost instantly heating the pan. With only the base of the pan heated the cooking zone stays cooler.

Easier to clean and safer to use, because the ceramic cooking top is warmed only by the heat transferred back from the cookware and its contents, spillages are less likely to burn on, and there is normally no need to wait for the glass to cool down before simply wiping it over with a cloth. And if the induction hob is turned on without a pot or pan being placed on it, the hob itself will not heat up which reduces the risk of burning yourself.

### Black glass finish

Our stunning induction hobs feature a black glass finish and bold displays. Our stylish collection mimicks the aesthetic of our built-in ovens and microwaves so your kitchen appliances can truly complement one another.






## Ceramic Hobs.

Fast heating, precise control.

Hobs made of glass ceramic make your life easier. Electric ceramic hobs heat up considerably faster than conventional steel hobs and are much easier to clean. They have smooth, even surfaces and cooking zones that glow red when they're on. You can adjust the temperature of the cooking zones very precisely with multiple available power levels. Siemens highSpeed cooking zones are optimised for fast cooking and get hot instantaneously.

- 
**touchControl**  
 Thanks to advanced touchControl technology, Siemens hobs can be operated by simply touching the surface. This means the controls are seamlessly integrated into the surface and make cleaning even easier.
- 
**controlPanel Lock**  
 With the childproof lock button, you can quickly and easily protect the hob against unauthorised operation. The childproof lock blocks all the hob's functions at the touch of a button. Locking is cleared by pressing the button again and holding down for a few seconds.
- 
**touchSlider**  
 The stylish and ergonomic touchSlider allows you to simply slide your finger across the touchSlider temperature scale to the desired setting. All 60cm models are controlled with one single 9.5cm touchSlider control, while the extra wide models have one, four or five touchSlider controls

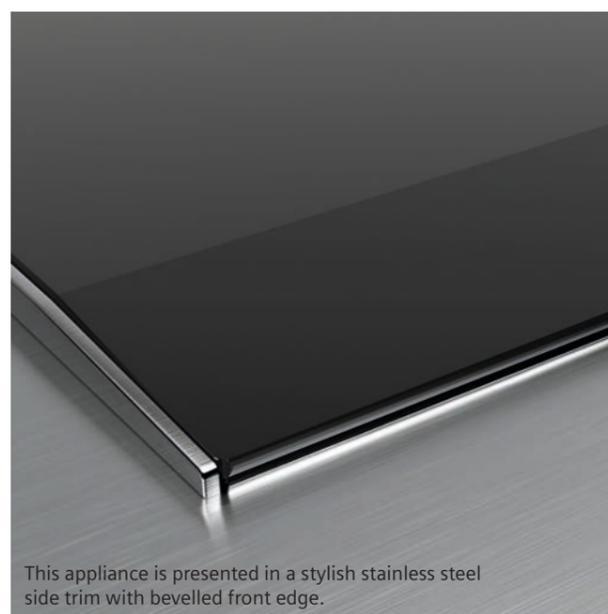

## Gas hobs.

High performance, high speed.

Tradition meets innovation – with their modern functions, Siemens gas hobs provide enjoyment in cooking like a pro. Our top-of-the-range models feature beautiful and durable black ceramic glass hob bases, with cast iron pan supports for a contemporary look. They are designed to coordinate with other appliances in the iQ700 range, and can be combined seamlessly with iQ700 domino and electric hobs. Low profile, single piece burners on the glass complete the sleek appearance.

- 
**stepFlame technology**  
 Introducing the ground-breaking innovation in gas hobs: stepFlame. Offering 9 precise power levels to give you the control of an electric hob, with gas. No more leaning over to check the flame size, no more hoping that it is at the right heat level. All this guesswork has been removed from cooking with gas. Whatever the level selected, the exact heat and the flame size needed is provided. It is just as easy to operate as it sounds, so conjuring up delicious meals is now easier than ever. It enables you to achieve the precise results you have always dreamt of. Your meals will be delicious, and your guests will be delighted.
- 
**Cast Iron**  
 Cast iron pan supports are designed to withstand even the heaviest of pots and pans and provide a sleek finish to each hob. All can be removed for easier cleaning and iQ700 models have dishwasher safe pan supports.
- 
**Wok burner**  
 Siemens gas hobs feature wok burners that deliver 3.3kW, 4.0kW, 4.2kW, 5.0kW or 6.0kW of power depending on the model, meeting the increasing demand for high speed cooking. But it is not just about power; they can be turned down to just 0.3kW – perfect for simmering. For the ultimate in flexibility, our 6.0kW and 5.0kW burners are dual control – the inner and outer flame rings can be adjusted independently via a single control.
- 
**dishwasher proof**  
 All gas on ceramic glass models feature pan supports that are treated with a special patented coating which resists discolouration and the damaging effects of a dishwasher.
- 
**Power Level Display with residual heat indicator**  
 Together with the new stepFlame technology, selected gas hobs feature an LED display which clearly shows the power level you have selected at a glance. For added safety, the LED display also shows whether there is any residual heat from the hob indicated by a capital 'H' for hot and a lower case 'h' for warm.

# Integrate freedom into your kitchen with cookConnect.



Let your hob interact with your hood for even more convenience.



#### cookConnect system

Thanks to the cookConnect system, the hood now activates itself when you start cooking for ultimate convenience. You can now control different elements of your hood, using just your hob, saving you time and allowing you to focus on just one appliance at a time. Your hob and hood will co-operate in perfect synchronisation. When you start cooking, the hood will activate itself and the power level can be adjusted right on the hob or automatically by the climateControl sensor which detects the amount of steam and odours emitted from the hob. You can even control the lighting settings of both appliances through the cookConnect system.

Discover more about cookConnect on pages 96-97. For corresponding cookConnect models see below.

#### cookConnect hobs

EZ977KZY1E, EX977LXV5E, EX877LYV5E, EX677LYV5E, EX975KXW1E, EX875KYW1E, EX675JYW1E, EX975LVV1E, EX675LXV1E.

#### cookConnect hoods

LR18HLT25, LR29CQS25B, LR99CQS25B, LR97CBS25B, LR97CAQ50B, LF31IVV60, LF91BUV50B, LC91KWW69B, LC91KWW60B, LC87KBM60B, LC87KHM60B, LC67KHM60B, LC97FVW69B, LC91BUV50B.

Models shown: **EX875KYW1E** flexInduction hob.

Hood for illustrative purposes only. Please see page 109 for current island cube hood model.

## Hob Accessories

For additional cooking flexibility Siemens provide a range of accessories for our flexInduction hobs.



#### Griddle pan

Converts your induction cooktop into a grill, specially designed for use across four flexInductors. The griddle pan maintains an even heat, perfect for frying steak or for roasting meat, fish and vegetables.



Griddle pan  
HZ390522



#### Teppan Yaki

Heating extremely quickly the Teppan Yaki is great for fast Japanese cooking. Perfect for a cooked breakfast or a healthy stir-fry, the pan comes in two sizes that fit across either three or four flexInductors.



40x20cm  
HZ390512

30x20cm  
HZ390511



#### Roasting dish with steamer

Perfect for use with flexInduction hobs this multipurpose dish is a must when cooking for a crowd. A removable steamer insert is available to compliment this dish and perfect for steaming vegetables.



Roasting dish  
HZ390011

Steamer insert  
HZ390012



For more details on the range of accessories available please ask your retailer or visit [siemens-home.bsh-group.com/uk/store](http://siemens-home.bsh-group.com/uk/store)





## The hob that knows no limits: freeInduction.

Siemens premium studioLine hobs include freeInduction, inductionAir, flexInduction and Induction models. All appliances within this range are styled with black glass and a blackSteel trim\*, ensuring they perfectly coordinate with the other exclusive studioLine appliances in the range. With top of the range features such as TFT Control, Dual lightSlider and the cookingSensor, and a refined style from every angle, Siemens studioLine hobs make a bold design statement to compliment any high quality kitchen.

\*Please note that the venting hob model has a flushline trim

studioLine

# A hob as flexible as your ideas: freeInduction.

Our new hob for 2019.

studioLine



New

### freeInduction

With our new freeInduction hob you can move pots and pans of different sizes and shapes freely on the whole hob, without being restricted to predefined cooking zones. On top of that, the freeInduction hob offers space for up to six pots and pans at the same time, giving you much more space and flexibility when cooking.



### Cooking like a chef: powerMove Pro

The powerMove Pro feature allows you to change the heat level automatically by just moving the cookware. In five steps you can choose between different power levels only by moving the pot or pan from one spot on the cooktop to another. The cooktop will react immediately and apply the right power level for cooking like a professional.

## Finishes

### blackSteel trim

All appliances within the studioLine range are styled with black glass and blackSteel trim, ensuring the materials and finish perfectly coordinate with other exclusive studioLine appliances in the range. The venting hob is the only appliance that has a flushline finish.



### activeLight

Sleek light bars give you intuitive visual feedback on where heat is applied. Side light bars change colour between white for pot detection, blue for heating, powerMove pro and flexMotion functions, yellow for when the cookingSensor is activated, and red for residual heat.



# freeInduction hob

studioLine

iQ 700 EZ977KZY1E

freeInduction hob  
Black glass

90cm



2 Year Warranty




### TFT touchDisplay

cookingSensor Plus regulates the temperature on the induction hob so as to cook everything to perfection without boiling over. It works without supervision, without readjustment – and saves electricity.

studioLine

home connect



| APPLIANCE TYPE   | FREEINDUCTION HOB                |                       |
|--|----------------------------------|-----------------------|
| Design family  | iQ 700                           |                       |
| Model number   | EZ977KZY1E                       |                       |
| <b>DESIGN</b>  |                                  |                       |
| Width (mm)   | 912mm                            |                       |
| Control position   | Front                            |                       |
| Control type   | TFT Control                      |                       |
| Style  | blackSteel side trim             |                       |
| <b>KEY FEATURES</b>  |                                  |                       |
| activeLight  | ■                                |                       |
| Home Connect   | ■                                |                       |
| cookConnect  | ■                                |                       |
| Full touch colour display  | ■                                |                       |
| cookingSensor plus <sup>1</sup>                                  | 1 x included                     |                       |
| fryingSensor   | -                                |                       |
| Number of flexInduction zones                                    | freeInduction                    |                       |
| Extended flexInduction zones <sup>2</sup>                        | -                                |                       |
| Number of combiZones   | -                                |                       |
| powerBoost   | ■                                |                       |
| panBoost   | ■                                |                       |
| powerMove  | 5 stages                         |                       |
| Automatic setting transfer                                       | ■                                |                       |
| <b>FEATURES</b>  |                                  |                       |
| Number of individual zones                                       | Unrestricted use of up to 6 pans |                       |
| Power levels   | 17                               |                       |
| Digital display  | ■                                |                       |
| Timer with automatic switch off for each zone                    | ■                                |                       |
| Count up timer   | ■                                |                       |
| QuickStart   | ■                                |                       |
| Energy consumption display                                       | ■                                |                       |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                       |                                  |                       |
| Nominal voltage (V)  | 220-240                          |                       |
| Maximum power output (W)   | 7,400                            |                       |
| Electrical cable length (cm)                                     | 150                              |                       |
| GB plug  | -                                |                       |
| One continuous cooking zone – power (kW) / dimensions (mm)       | 3.50                             | 3,200 cm <sup>2</sup> |
| One continuous cooking zone – with powerBoost (max. kW)          | 5.50                             |                       |
| Rear left flexInduction zone – power (kW) / dimensions (mm)      | -                                |                       |
| Rear left zone – power (kW) / diameter (mm)                      | -                                |                       |
| Rear right flexInduction zone – power (kW) / dimensions (mm)     | -                                |                       |
| Rear right zone – power (kW) / diameter (mm)                     | -                                |                       |
| Rear Centre zone – power (kW) / diameter (mm)                    | -                                |                       |
| Front Centre zone – power (kW) / diameter (mm)                   | -                                |                       |
| Front left flexInduction zone – power (kW) / dimensions (mm)     | -                                |                       |
| Front left zone – power (kW) / diameter (mm)                     | -                                |                       |
| Front right flexInduction zone – power (kW) / dimensions (mm)    | -                                |                       |
| Front right zone – power (kW) / diameter (mm)                    | -                                |                       |
| flexInduction Zone left – power (kW) / dimensions (mm)           | -                                |                       |
| flexInduction Zone right – power (kW) / dimensions (mm)          | -                                |                       |
| Extended flexInduction rear left – power (kW) / dimensions (mm)  | -                                |                       |
| Extended flexInduction rear right – power (kW) / dimensions (mm) | -                                |                       |
| CombiZone left – power (kW) / dimensions (mm)                    | -                                |                       |
| CombiZone right – power (kW) / dimensions (mm)                   | -                                |                       |
| Rear left zone – with powerBoost (max. kW)                       | -                                |                       |
| Rear right zone – with powerBoost (max. kW)                      | -                                |                       |
| Rear Centre zone – with powerBoost (max. kW)                     | -                                |                       |
| Front Centre zone – with powerBoost (max. kW)                    | -                                |                       |
| Front left zone – with powerBoost (max. kW)                      | -                                |                       |
| Front right zone – with powerBoost (max. kW)                     | -                                |                       |

■ Yes, model has this feature. – Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

<sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

# inductionAir hobs

## iQ700 EX807LX33E

inductionAir hob  
Black glass

studioLine

80cm



**dual lightSlider**  
The new dual lightSlider lets you easily select and join the cooking zones of the iQ700 Induction Cooktops via one neatly arranged interface. And when switched off, it is completely invisible.

■ Yes, model has this feature. – Feature not available for this model.  
All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup> Max 3 sensors at any time; one WSP provided.  
<sup>2</sup> Air flow and noise declarations made in line with CECEC Code Of Conduct.  
<sup>3</sup> Measured according to EN61591 on largest pipe diameter.  
<sup>4</sup> Sound power measured according to EN60704-3 on largest pipe diameter.

studioLine



### inductionAir hob specifications

| APPLIANCE TYPE  | INDUCTIONAIR HOB |           |
|---|------------------|-----------|
| Design family   | studioLine       |           |
| Model number  | EX807LX33E       |           |
| <b>DESIGN</b>   |                  |           |
| Width (mm)  | 792              |           |
| Control type  | dual lightSlider |           |
| Style   | Flushline        |           |
| <b>KEY FEATURES</b>   |                  |           |
| Integrated downDraft extractor  | ■                |           |
| Fully automatic extraction via climateControl Sensor cookingSensor ready <sup>1</sup> | ■                |           |
| fryingSensor  | 1 x included     |           |
| Number of flexInduction zones   | 5 settings       |           |
| powerMove   | 2                |           |
| Automatic setting transfer  | 3 stages         |           |
| Digital display   | ■                |           |
| combiZone Induction   | -                |           |
| <b>HOB FEATURES</b>   |                  |           |
| Number of individual zones  | 4                |           |
| Power levels  | 17               |           |
| powerBoost  | ■                |           |
| Energy consumption display  | ■                |           |
| Timer with automatic switch off for each zone   | ■                |           |
| Count up timer  | ■                |           |
| <b>HOOD FEATURES</b>  |                  |           |
| climateControl sensor   | ■                |           |
| Ducted operation using accessory kit  | HZ381401         |           |
| Recirculating operation using accessory kits  | HZ381501         |           |
| Power levels  | 9                |           |
| Intensive setting   | 1                |           |
| Automatic intensive revert setting  | 6 minutes        |           |
| Automatic or manual control   | ■                |           |
| Automatic after running   | 6 minutes        |           |
| Dishwasher safe filter cassette with spillage collection                              | 200ml capacity   |           |
| Dishwasher spillage overflow collector  | 2L capacity      |           |
| Electronic grease filter / cleanAir filter saturation indicators                      | ■ / ■            |           |
| <b>SAFETY FEATURES</b>  |                  |           |
| Main on/off switch  | ■                |           |
| Two stage residual heat indicators  | ■                |           |
| Safety lock   | ■                |           |
| Automatic pan recognition   | ■                |           |
| Timed safety switch off   | ■                |           |
| <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b>                                      |                  |           |
| Nominal voltage (V)   | 220-240          |           |
| Maximum power output (W)  | 7,400            |           |
| Electrical cable length (cm)  | 110              |           |
| Rear left flexInduction zone – power (kW) / dimensions (mm)                           | 2.20             | 200 x 240 |
| Rear right flexInduction zone – power (kW) / dimensions (mm)                          | 2.20             | 200 x 240 |
| Front left flexInduction zone – power (kW) / dimensions (mm)                          | 2.20             | 200 x 240 |
| Front right flexInduction zone – power (kW) / dimensions (mm)                         | 2.20             | 200 x 240 |
| flexInduction zone left – power (kW) / dimensions (mm)                                | 3.30             | 400 x 240 |
| flexInduction zone right – power (kW) / dimensions (mm)                               | 3.30             | 400 x 240 |
| Rear left zone – with powerBoost (max. kW)  | 3.70             |           |
| Rear right zone – with powerBoost (max. kW)   | 3.70             |           |
| Front left zone – with powerBoost (max. kW)   | 3.70             |           |
| Front right zone – with powerBoost (max. kW)  | 3.70             |           |
| <b>PERFORMANCE / TECHNICAL INFORMATION – EXTRACTOR</b>                                |                  |           |
| Extractor energy efficiency rating  | A                |           |
| Extraction rate in m <sup>3</sup> /h <sup>(2,3)</sup>                                 |                  |           |
| – ducted / recirculating power level minimum  | 150 / 139        |           |
| – ducted / recirculating power level maximum  | 550 / 557        |           |
| – ducted / recirculating power level intensive  | 690 / 630        |           |
| Noise level (sound power) based on dB(A) re 1pW <sup>(2,4)</sup>                      |                  |           |
| – ducted / recirculating power level minimum  | 39 / 42          |           |
| – ducted / recirculating power level maximum  | 69 / 74          |           |
| – ducted / recirculating power level intensive  | 76 / 75          |           |
| Motor power (W)   | 170              |           |
| <b>OPTIONAL ACCESSORIES</b>   |                  |           |
| Wireless temperature sensor   | HZ39050          |           |
| Set of four pans (3 x pans, 1 x saute pan)  | HZ390042         |           |
| Rectangular roasting pan with lid (approx. 320 x 200mm)                               | HZ390011         |           |
| Steamer pan insert of use with HEZ390011 roasting pan                                 | HZ390012         |           |
| Teppan Yaki (approx. 300 x 200mm)   | HZ390511         |           |
| Teppan Yaki (approx. 400 x 200mm)   | HZ390512         |           |
| Griddle plate (approx. 400 x 200mm)   | HZ390522         |           |

### inductionAir hob specifications

| APPLIANCE TYPE  | INDUCTIONAIR HOB     |           |                    |           |
|---|----------------------|-----------|--------------------|-----------|
| Design family   | iQ700                |           | iQ500              |           |
| Model number  | EX875LX34E           |           | ED851F511E         |           |
| <b>DESIGN</b>   |                      |           |                    |           |
| Width (mm)  | 812                  |           | 802                |           |
| Control type  | dual lightSlider     |           | touchSlider        |           |
| Style   | Stainless steel trim |           | 3 sided bevel edge |           |
| <b>KEY FEATURES</b>   |                      |           |                    |           |
| Integrated downDraft extractor  | ■                    |           | ■                  |           |
| Fully automatic extraction via climateControl Sensor cookingSensor ready <sup>1</sup> | ■                    |           | -                  |           |
| fryingSensor  | HZ39050 required     |           | -                  |           |
| Number of flexInduction zones   | 5 settings           |           | -                  |           |
| powerMove   | 2                    |           | -                  |           |
| Automatic setting transfer  | 3 stages             |           | 2 stages           |           |
| Digital display   | ■                    |           | -                  |           |
| combiZone Induction   | -                    |           | ■                  |           |
| <b>HOB FEATURES</b>   |                      |           |                    |           |
| Number of individual zones  | 4                    |           | 4                  |           |
| Power levels  | 17                   |           | 17                 |           |
| powerBoost  | ■                    |           | ■                  |           |
| Energy consumption display  | ■                    |           | ■                  |           |
| Timer with automatic switch off for each zone   | ■                    |           | ■                  |           |
| Count up timer  | ■                    |           | -                  |           |
| <b>HOOD FEATURES</b>  |                      |           |                    |           |
| climateControl sensor   | ■                    |           | ■                  |           |
| Ducted operation using accessory kit  | HZ381401             |           | HZ381401           |           |
| Recirculating operation using accessory kits  | HZ381501             |           | HZ381501           |           |
| Power levels  | 9                    |           | 9                  |           |
| Intensive setting   | 1                    |           | 1                  |           |
| Automatic intensive revert setting  | 6 minutes            |           | 6 minutes          |           |
| Automatic or manual control   | ■                    |           | ■                  |           |
| Automatic after running   | 6 minutes            |           | 6 minutes          |           |
| Dishwasher safe filter cassette with spillage collection                              | 200ml capacity       |           | 200ml capacity     |           |
| Dishwasher spillage overflow collector  | 2L capacity          |           | 2L capacity        |           |
| Electronic grease filter / cleanAir filter saturation indicators                      | ■ / ■                |           | ■ / ■              |           |
| <b>SAFETY FEATURES</b>  |                      |           |                    |           |
| Main on/off switch  | ■                    |           | ■                  |           |
| Two stage residual heat indicators  | ■                    |           | ■                  |           |
| Safety lock   | ■                    |           | ■                  |           |
| Automatic pan recognition   | ■                    |           | ■                  |           |
| Timed safety switch off   | ■                    |           | ■                  |           |
| <b>PERFORMANCE / TECHNICAL INFORMATION – HOB</b>                                      |                      |           |                    |           |
| Nominal voltage (V)   | 220-240              |           | 220-240            |           |
| Maximum power output (W)  | 7,400                |           | 7,400              |           |
| Electrical cable length (cm)  | 120                  |           | 120                |           |
| Rear left flexInduction zone – power (kW) / dimensions (mm)                           | 2.20                 | 200 x 240 | 2.20               | 210 x 210 |
| Rear right flexInduction zone – power (kW) / dimensions (mm)                          | 2.20                 | 200 x 240 | 1.40               | 145 x 145 |
| Front left flexInduction zone – power (kW) / dimensions (mm)                          | 2.20                 | 200 x 240 | 2.20               | 210 x 210 |
| Front right flexInduction zone – power (kW) / dimensions (mm)                         | 2.20                 | 200 x 240 | 1.80               | 180 x 180 |
| flexInduction zone left – power (kW) / dimensions (mm)                                | 3.30                 | 400 x 240 | 3.60               | 439 x 210 |
| flexInduction zone right – power (kW) / dimensions (mm)                               | 3.30                 | 400 x 240 | -                  | -         |
| Rear left zone – with powerBoost (max. kW)  | 3.70                 |           | 3.70               |           |
| Rear right zone – with powerBoost (max. kW)   | 3.70                 |           | 2.20               |           |
| Front left zone – with powerBoost (max. kW)   | 3.70                 |           | 3.70               |           |
| Front right zone – with powerBoost (max. kW)  | 3.70                 |           | 3.10               |           |
| <b>PERFORMANCE / TECHNICAL INFORMATION – EXTRACTOR</b>                                |                      |           |                    |           |
| Extractor energy efficiency rating  | A                    |           | A                  |           |
| Extraction rate in m <sup>3</sup> /h <sup>(2,3)</sup>                                 |                      |           |                    |           |
| – ducted / recirculating power level minimum  | 150 / 139            |           | 150 / 139          |           |
| – ducted / recirculating power level maximum  | 550 / 557            |           | 550 / 557          |           |
| – ducted / recirculating power level intensive  | 690 / 630            |           | 690 / 630          |           |
| Noise level (sound power) based on dB(A) re 1pW <sup>(2,4)</sup>                      |                      |           |                    |           |
| – ducted / recirculating power level minimum  | 39 / 42              |           | 39 / 42            |           |
| – ducted / recirculating power level maximum  | 69 / 74              |           | 69 / 74            |           |
| – ducted / recirculating power level intensive  | 76 / 75              |           | 76 / 75            |           |
| Motor power (W)   | 170                  |           | 170                |           |
| <b>OPTIONAL ACCESSORIES</b>   |                      |           |                    |           |
| Wireless temperature sensor   | HZ39050              |           | HZ39050            |           |
| Set of four pans (3 x pans, 1 x saute pan)  | HZ390042             |           | HZ390042           |           |
| Rectangular roasting pan with lid (approx. 320 x 200mm)                               | HZ390011             |           | -                  |           |
| Steamer pan insert of use with HEZ390011 roasting pan                                 | HZ390012             |           | -                  |           |
| Teppan Yaki (approx. 300 x 200mm)   | HZ390511             |           | -                  |           |
| Teppan Yaki (approx. 400 x 200mm)   | HZ390512             |           | -                  |           |
| Griddle plate (approx. 400 x 200mm)   | HZ390522             |           | -                  |           |

■ Yes, model has this feature.  
– Feature not available for this model.  
All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup> Max 3 sensors at any time; one WSP provided.  
<sup>2</sup> Air flow and noise declarations made in line with CECEC Code Of Conduct.  
<sup>3</sup> Measured according to EN61591 on largest pipe diameter.  
<sup>4</sup> Sound power measured according to EN60704-3 on largest pipe diameter.


# flexInduction hobs

**iQ 700 EX977LXV5E**

studioLine

flexInduction hob  
Black glass

90cm

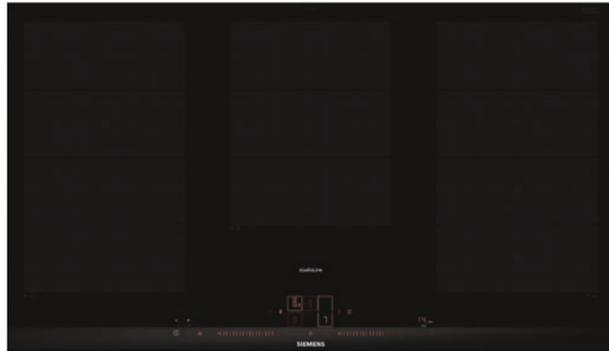

2  
Year Warranty



## flexInduction hob specifications

| APPLIANCE TYPE   | FLEXINDUCTION HOBS   |           |
|--|----------------------|-----------|
| Design family  | iQ 700               |           |
| Model number   | EX977LXV5E           |           |
| <b>DESIGN</b>  |                      |           |
| Width (mm)   | 912                  |           |
| Control position   | Front                |           |
| Control type   | dual lightSlider     |           |
| Style  | blackSteel side trim |           |
| <b>KEY FEATURES</b>  |                      |           |
| activeLight  | -                    |           |
| Home Connect   | ■                    |           |
| cookConnect  | ■                    |           |
| Full touch colour display  | -                    |           |
| cookingSensor plus <sup>1</sup>                                  | -                    |           |
| fryingSensor   | 5 settings           |           |
| Number of flexInduction zones                                    | 3                    |           |
| Extended flexInduction Zone <sup>2</sup>                         | -                    |           |
| Number of combiZones   | -                    |           |
| powerBoost   | ■                    |           |
| panBoost   | ■                    |           |
| powerMove  | 3 stages             |           |
| Automatic setting transfer                                       | -                    |           |
| <b>FEATURES</b>  |                      |           |
| Number of individual zones                                       | 5                    |           |
| Power levels   | 17                   |           |
| Digital display  | ■                    |           |
| Timer with automatic switch off for each zone                    | ■                    |           |
| Count up timer   | ■                    |           |
| QuickStart   | ■                    |           |
| Energy consumption display                                       | ■                    |           |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                       |                      |           |
| Nominal voltage (V)  | 220-240              |           |
| Maximum power output (W)   | 11,100               |           |
| Electrical cable length (cm)                                     | 110                  |           |
| GB plug  | -                    |           |
| One continuous cooking zone – power (kW) / dimensions (mm)       | -                    |           |
| Rear left flexInduction zone – power (kW) / dimensions (mm)      | 2.20                 | 200 x 240 |
| Rear left zone – power (kW) / diameter (mm)                      | -                    | -         |
| Rear right flexInduction zone – power (kW) / dimensions (mm)     | 2.20                 | 200 x 240 |
| Rear right zone – power (kW) / diameter (mm)                     | -                    | -         |
| Rear Centre zone – power (kW) / diameter (mm)                    | 2.60                 | 300 x 240 |
| Front Centre zone – power (kW) / diameter (mm)                   | -                    | -         |
| Front left flexInduction zone – power (kW) / dimensions (mm)     | 2.20                 | 200 x 240 |
| Front left zone – power (kW) / diameter (mm)                     | -                    | -         |
| Front right flexInduction zone – power (kW) / dimensions (mm)    | 2.20                 | 200 x 240 |
| Front right zone – power (kW) / diameter (mm)                    | -                    | -         |
| flexInduction Zone left – power (kW) / dimensions (mm)           | 3.30                 | 400 x 240 |
| flexInduction Zone right – power (kW) / dimensions (mm)          | 3.30                 | 400 x 240 |
| Extended flexInduction rear left – power (kW) / dimensions (mm)  | -                    | -         |
| Extended flexInduction rear right – power (kW) / dimensions (mm) | -                    | -         |
| CombiZone left – power (kW) / dimensions (mm)                    | -                    | -         |
| CombiZone right – power (kW) / dimensions (mm)                   | -                    | -         |
| Rear left zone – with powerBoost (max. kW)                       | 3.70                 |           |
| Rear right zone – with powerBoost (max. kW)                      | 3.70                 |           |
| Rear Centre zone – with powerBoost (max. kW)                     | 3.70                 |           |
| Front Centre zone – with powerBoost (max. kW)                    | -                    |           |
| Front left zone – with powerBoost (max. kW)                      | 3.70                 |           |
| Front right zone – with powerBoost (max. kW)                     | 3.70                 |           |

■ Yes, model has this feature. – Feature not available for this model.  
All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

<sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.



## flexInduction hob specifications

| APPLIANCE TYPE   | iQ 700               |           | iQ 700               |           |
|--|----------------------|-----------|----------------------|-----------|
| Design family  | EX877LYV5E           |           | EX677LYV5E           |           |
| Model number   | EX877LYV5E           |           | EX677LYV5E           |           |
| <b>DESIGN</b>  |                      |           |                      |           |
| Width (mm)   | 812                  |           | 602                  |           |
| Control position   | Front                |           | Front                |           |
| Control type   | dual lightSlider     |           | dual lightSlider     |           |
| Style  | blackSteel side trim |           | blackSteel side trim |           |
| <b>KEY FEATURES</b>  |                      |           |                      |           |
| activeLight  | -                    |           | -                    |           |
| Home Connect   | ■                    |           | ■                    |           |
| cookConnect  | ■                    |           | ■                    |           |
| Full touch colour display  | -                    |           | -                    |           |
| cookingSensor plus <sup>1</sup>                                  | -                    |           | -                    |           |
| fryingSensor   | 5 settings           |           | 5 settings           |           |
| Number of flexInduction zones                                    | 2                    |           | 2                    |           |
| Extended flexInduction Zone <sup>2</sup>                         | 2                    |           | 1                    |           |
| Number of combiZones   | -                    |           | -                    |           |
| powerBoost   | ■                    |           | ■                    |           |
| panBoost   | ■                    |           | ■                    |           |
| powerMove  | 3 stages             |           | 3 stages             |           |
| Automatic setting transfer                                       | -                    |           | -                    |           |
| <b>FEATURES</b>  |                      |           |                      |           |
| Number of individual zones                                       | 4                    |           | 4                    |           |
| Power levels   | 17                   |           | 17                   |           |
| Digital display  | ■                    |           | ■                    |           |
| Timer with automatic switch off for each zone                    | ■                    |           | ■                    |           |
| Count up timer   | ■                    |           | ■                    |           |
| QuickStart   | ■                    |           | ■                    |           |
| Energy consumption display                                       | ■                    |           | ■                    |           |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                       |                      |           |                      |           |
| Nominal voltage (V)  | 220-240              |           | 220-240              |           |
| Maximum power output (W)   | 7,400                |           | 7,400                |           |
| Electrical cable length (cm)                                     | 110                  |           | 110                  |           |
| GB plug  | -                    |           | -                    |           |
| One continuous cooking zone – power (kW) / dimensions (mm)       | -                    |           | -                    |           |
| Rear left flexInduction zone – power (kW) / dimensions (mm)      | 2.20                 | 200 x 230 | 2.20                 | 190 x 230 |
| Rear left zone – power (kW) / diameter (mm)                      | -                    | -         | -                    | -         |
| Rear right flexInduction zone – power (kW) / dimensions (mm)     | 2.20                 | 200 x 230 | 2.20                 | 190 x 230 |
| Rear right zone – power (kW) / diameter (mm)                     | -                    | -         | -                    | -         |
| Rear Centre zone – power (kW) / diameter (mm)                    | -                    | -         | -                    | -         |
| Front Centre zone – power (kW) / diameter (mm)                   | -                    | -         | -                    | -         |
| Front left flexInduction zone – power (kW) / dimensions (mm)     | 2.20                 | 200 x 230 | 2.20                 | 190 x 230 |
| Front left zone – power (kW) / diameter (mm)                     | -                    | -         | -                    | -         |
| Front right flexInduction zone – power (kW) / dimensions (mm)    | 2.20                 | 200 x 230 | 2.20                 | 190 x 230 |
| Front right zone – power (kW) / diameter (mm)                    | -                    | -         | -                    | -         |
| flexInduction Zone left – power (kW) / dimensions (mm)           | 3.30                 | 400 x 230 | 3.30                 | 380 x 230 |
| flexInduction Zone right – power (kW) / dimensions (mm)          | 3.30                 | 400 x 230 | 3.30                 | 380 x 230 |
| Extended flexInduction rear left – power (kW) / dimensions (mm)  | 3.30                 | 300 x 300 | 3.30                 | 300 x 300 |
| Extended flexInduction rear right – power (kW) / dimensions (mm) | 3.30                 | 300 x 300 | 3.30                 | 300 x 300 |
| CombiZone left – power (kW) / dimensions (mm)                    | -                    | -         | -                    | -         |
| CombiZone right – power (kW) / dimensions (mm)                   | -                    | -         | -                    | -         |
| Rear left zone – with powerBoost (max. kW)                       | 3.70                 |           | 3.70                 |           |
| Rear right zone – with powerBoost (max. kW)                      | 3.70                 |           | 3.70                 |           |
| Rear Centre zone – with powerBoost (max. kW)                     | -                    |           | -                    |           |
| Front Centre zone – with powerBoost (max. kW)                    | -                    |           | -                    |           |
| Front left zone – with powerBoost (max. kW)                      | 3.70                 |           | 3.70                 |           |
| Front right zone – with powerBoost (max. kW)                     | 3.70                 |           | 3.70                 |           |

■ Yes, model has this feature. – Feature not available for this model.  
All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

<sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.



flexInduction hob specifications

| APPLIANCE TYPE   | FLEXINDUCTION HOB         |           |                           |           |                           |           |                           |           |                           |           |
|--|---------------------------|-----------|---------------------------|-----------|---------------------------|-----------|---------------------------|-----------|---------------------------|-----------|
| Design family  | iC700                     |           |
| Model number   | EX975KXW1E                |           | EX875KYW1E                |           | EX675JYW1E                |           | EX975LVV1E                |           | EX675LXV1E                |           |
| <b>DESIGN</b>  |                           |           |                           |           |                           |           |                           |           |                           |           |
| Width (mm)   | 912                       |           | 812                       |           | 612                       |           | 912                       |           | 602                       |           |
| Control position   | Front                     |           |
| Control type   | TFT Control               |           | TFT Control               |           | TFT Control               |           | Dual lightSlider          |           | Dual lightSlider          |           |
| Style  | Stainless steel side trim |           |
| <b>KEY FEATURES</b>  |                           |           |                           |           |                           |           |                           |           |                           |           |
| activeLight  | -                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| Home Connect   | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| cookConnect  | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| Full touch colour display  | ■                         |           | ■                         |           | ■                         |           | -                         |           | -                         |           |
| cookingSensor plus <sup>1</sup>                                  | Ready                     |           | Ready                     |           | Ready                     |           | -                         |           | -                         |           |
| fryingSensor   | 5 settings                |           | 5 settings                |           | 5 settings                |           | 4 settings                |           | 4 settings                |           |
| Number of flexInduction zones                                    | 3                         |           | 2                         |           | 2                         |           | 2                         |           | 2                         |           |
| Extended flexInduction Zone <sup>2</sup>                         | -                         |           | 2                         |           | 1                         |           | -                         |           | -                         |           |
| Number of combiZones   | -                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| powerBoost   | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| panBoost   | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| powerMove  | 3 stages                  |           |
| Automatic setting transfer                                       | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| <b>FEATURES</b>  |                           |           |                           |           |                           |           |                           |           |                           |           |
| Number of individual zones                                       | 5                         |           | 4                         |           | 4                         |           | 5                         |           | 4                         |           |
| Power levels   | 17                        |           | 17                        |           | 17                        |           | 17                        |           | 17                        |           |
| Digital display  | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| Timer with automatic switch off for each zone                    | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| Count up timer   | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| QuickStart   | -                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| Energy consumption display                                       | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                       |                           |           |                           |           |                           |           |                           |           |                           |           |
| Nominal voltage (V)  | 220-240                   |           | 220-240                   |           | 220-240                   |           | 220-240                   |           | 220-240                   |           |
| Maximum power output (W)   | 11,100                    |           | 7,400                     |           | 7,400                     |           | 11,100                    |           | 7,400                     |           |
| Electrical cable length (cm)                                     | 110                       |           | 110                       |           | 110                       |           | 110                       |           | 110                       |           |
| GB plug  | -                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| One continuous cooking zone – power (kW) / dimensions (mm)       |                           |           |                           |           |                           |           |                           |           |                           |           |
| Rear left flexInduction zone – power (kW) / dimensions (mm)      | 2.20                      | 200 x 240 | 2.20                      | 200 x 230 | 2.20                      | 200 x 230 | 2.20                      | 200 x 240 | 2.20                      | 200 x 240 |
| Rear left zone – power (kW) / diameter (mm)                      | -                         | -         | -                         | -         | -                         | -         | -                         | -         | -                         | -         |
| Rear right flexInduction zone – power (kW) / dimensions (mm)     | 2.20                      | 200 x 240 | 2.20                      | 200 x 230 | 2.20                      | 200 x 230 | 2.20                      | 200 x 240 | 2.20                      | 200 x 240 |
| Rear right zone – power (kW) / diameter (mm)                     | -                         | -         | -                         | -         | -                         | -         | -                         | -         | -                         | -         |
| Rear Centre zone – power (kW) / diameter (mm)                    | 2.60                      | 300 x 240 | -                         | -         | -                         | -         | 3.30                      | 300 x 240 | -                         | -         |
| Front Centre zone – power (kW) / diameter (mm)                   | -                         | -         | -                         | -         | -                         | -         | -                         | -         | -                         | -         |
| Front left flexInduction zone – power (kW) / dimensions (mm)     | 2.20                      | 200 x 240 | 2.20                      | 200 x 230 | 2.20                      | 200 x 230 | 2.20                      | 200 x 240 | 2.20                      | 200 x 240 |
| Front left zone – power (kW) / diameter (mm)                     | -                         | -         | -                         | -         | -                         | -         | -                         | -         | -                         | -         |
| Front right flexInduction zone – power (kW) / dimensions (mm)    | 2.20                      | 200 x 240 | 2.20                      | 200 x 230 | 2.20                      | 200 x 230 | 2.20                      | 200 x 240 | 2.20                      | 200 x 240 |
| Front right zone – power (kW) / diameter (mm)                    | -                         | -         | -                         | -         | -                         | -         | -                         | -         | -                         | -         |
| flexInduction Zone left – power (kW) / dimensions (mm)           | 3.30                      | 400 x 240 | 3.30                      | 400 x 230 | 3.30                      | 400 x 230 | 3.30                      | 400 x 240 | 3.30                      | 400 x 240 |
| flexInduction Zone right – power (kW) / dimensions (mm)          | 3.30                      | 400 x 240 | 3.30                      | 400 x 230 | 3.30                      | 400 x 230 | 3.30                      | 400 x 240 | 3.30                      | 400 x 240 |
| Extended flexInduction rear left – power (kW) / dimensions (mm)  | -                         | -         | 3.30                      | 300 x 300 | 3.30                      | 300 x 300 | -                         | -         | -                         | -         |
| Extended flexInduction rear right – power (kW) / dimensions (mm) | -                         | -         | 3.30                      | 300 x 300 | 3.30                      | 300 x 300 | -                         | -         | -                         | -         |
| CombiZone left – power (kW) / dimensions (mm)                    | -                         | -         | -                         | -         | -                         | -         | -                         | -         | -                         | -         |
| CombiZone right – power (kW) / dimensions (mm)                   | -                         | -         | -                         | -         | -                         | -         | -                         | -         | -                         | -         |
| Rear left zone – with powerBoost (max. kW)                       | 3.70                      |           | 3.70                      |           | 3.70                      |           | 3.70                      |           | 3.70                      |           |
| Rear right zone – with powerBoost (max. kW)                      | 3.70                      |           | 3.70                      |           | 3.70                      |           | 3.70                      |           | 3.70                      |           |
| Rear Centre zone – with powerBoost (max. kW)                     | 3.70                      |           | -                         |           | -                         |           | 3.70                      |           | -                         |           |
| Front Centre zone – with powerBoost (max. kW)                    | -                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| Front left zone – with powerBoost (max. kW)                      | 3.70                      |           | 3.70                      |           | 3.70                      |           | 3.70                      |           | 3.70                      |           |
| Front right zone – with powerBoost (max. kW)                     | 3.70                      |           | 3.70                      |           | 3.70                      |           | 3.70                      |           | 3.70                      |           |

■ Yes, model has this feature. – Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

<sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.



flexInduction hob specifications

| APPLIANCE TYPE   | FLEXINDUCTION HOB         |           |                           |           |                           |           |                           |           |                           |           |
|--|---------------------------|-----------|---------------------------|-----------|---------------------------|-----------|---------------------------|-----------|---------------------------|-----------|
| Design family  | iC700                     |           |
| Model number   | EX275FXB1E                |           | EX879FVC1E                |           | EX679FEC1E                |           | EX851FVC1E                |           | EX651FEC1E                |           |
| <b>DESIGN</b>  |                           |           |                           |           |                           |           |                           |           |                           |           |
| Width (mm)   | 912                       |           | 812                       |           | 602                       |           | 812                       |           | 602                       |           |
| Control position   | Front                     |           |
| Control type   | touchSlider               |           |
| Style  | Stainless steel side trim |           |
| <b>KEY FEATURES</b>  |                           |           |                           |           |                           |           |                           |           |                           |           |
| activeLight  | -                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| Home Connect   | -                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| cookConnect  | -                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| Full touch colour display  | -                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| cookingSensor plus <sup>1</sup>                                  | -                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| fryingSensor   | -                         |           | 4 settings                |           | 5 settings                |           | 4 settings                |           | 5 settings                |           |
| Number of flexInduction zones                                    | 2                         |           | 1                         |           | 1                         |           | 1                         |           | 1                         |           |
| Extended flexInduction Zone <sup>2</sup>                         | -                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| Number of combiZones   | -                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| powerBoost   | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| panBoost   | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| powerMove  | -                         |           | 3 stages                  |           | 3 stages                  |           | 3 stages                  |           | 3 stages                  |           |
| Automatic setting transfer                                       | ■                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| <b>FEATURES</b>  |                           |           |                           |           |                           |           |                           |           |                           |           |
| Number of individual zones                                       | 4                         |           | 5                         |           | 4                         |           | 5                         |           | 4                         |           |
| Power levels   | 17                        |           | 17                        |           | 17                        |           | 17                        |           | 17                        |           |
| Digital display  | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| Timer with automatic switch off for each zone                    | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| Count up timer   | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| QuickStart   | -                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| Energy consumption display                                       | ■                         |           | ■                         |           | ■                         |           | ■                         |           | ■                         |           |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                       |                           |           |                           |           |                           |           |                           |           |                           |           |
| Nominal voltage (V)  | 220-240                   |           | 220-240                   |           | 220-240                   |           | 220-240                   |           | 220-240                   |           |
| Maximum power output (W)   | 7,400                     |           | 7,400                     |           | 7,400                     |           | 7,400                     |           | 7,400                     |           |
| Electrical cable length (cm)                                     | 110                       |           | 110                       |           | 110                       |           | 110                       |           | 110                       |           |
| GB plug  | -                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| One continuous cooking zone – power (kW) / dimensions (mm)       |                           |           |                           |           |                           |           |                           |           |                           |           |
| Rear left flexInduction zone – power (kW) / dimensions (mm)      | 2.20                      | 200 x 240 | -                         | -         | 2.20                      | 190 x 240 | -                         | -         | 2.20                      | 190 x 240 |
| Rear left zone – power (kW) / diameter (mm)                      | -                         | -         | 1.40                      | 145       | -                         | -         | 1.40                      | 145       | -                         | -         |
| Rear right flexInduction zone – power (kW) / dimensions (mm)     | 2.20                      | 200 x 240 | 2.20                      | 200 x 210 | -                         | -         | 2.20                      | 200 x 210 | -                         | -         |
| Rear right zone – power (kW) / diameter (mm)                     | -                         | -         | -                         | -         | 1.40                      | 145       | -                         | -         | 1.40                      | 145       |
| Rear Centre zone – power (kW) / diameter (mm)                    | -                         | -         | 2.20                      | 240       | -                         | -         | 2.20                      | 240       | -                         | -         |
| Front Centre zone – power (kW) / diameter (mm)                   | -                         | -         | -                         | -         | -                         | -         | -                         | -         | -                         | -         |
| Front left flexInduction zone – power (kW) / dimensions (mm)     | 2.20                      | 200 x 240 | -                         | -         | 2.20                      | 190 x 240 | -                         | -         | 2.20                      | 190 x 240 |
| Front left zone – power (kW) / diameter (mm)                     | -                         | -         | 1.80                      | 180       | -                         | -         | 1.80                      | 180       | -                         | -         |
| Front right flexInduction zone – power (kW) / dimensions (mm)    | 2.20                      | 200 x 240 | 2.20                      | 200 x 210 | -                         | -         | 2.20                      | 200 x 210 | -                         | -         |
| Front right zone – power (kW) / diameter (mm)                    | -                         | -         | -                         | -         | 2.20                      | 210       | -                         | -         | 2.20                      | 210       |
| flexInduction Zone left – power (kW) / dimensions (mm)           | 3.30                      | 400 x 240 | -                         | -         | 3.30                      | 380 x 240 | -                         | -         | 3.30                      | 380 x 240 |
| flexInduction Zone right – power (kW) / dimensions (mm)          | 3.30                      | 400 x 240 | 3.30                      | 400 x 210 | -                         | -         | 3.30                      | 400 x 210 | -                         | -         |
| Extended flexInduction rear left – power (kW) / dimensions (mm)  | -                         | -         | -                         | -         | -                         | -         | -                         | -         | -                         | -         |
| Extended flexInduction rear right – power (kW) / dimensions (mm) | -                         | -         | -                         | -         | -                         | -         | -                         | -         | -                         | -         |
| CombiZone left – power (kW) / dimensions (mm)                    | -                         | -         | -                         | -         | -                         | -         | -                         | -         | -                         | -         |
| CombiZone right – power (kW) / dimensions (mm)                   | -                         | -         | -                         | -         | -                         | -         | -                         | -         | -                         | -         |
| Rear left zone – with powerBoost (max. kW)                       | 3.70                      |           | 2.20                      |           | 3.70                      |           | 2.20                      |           | 3.70                      |           |
| Rear right zone – with powerBoost (max. kW)                      | 3.70                      |           | 3.70                      |           | 2.20                      |           | 3.70                      |           | 2.20                      |           |
| Rear Centre zone – with powerBoost (max. kW)                     | -                         |           | 3.70                      |           | -                         |           | 3.70                      |           | -                         |           |
| Front Centre zone – with powerBoost (max. kW)                    | -                         |           | -                         |           | -                         |           | -                         |           | -                         |           |
| Front left zone – with powerBoost (max. kW)                      | 3.70                      |           | 3.10                      |           | 3.70                      |           | 3.10                      |           | 3.70                      |           |
| Front right zone – with powerBoost (max. kW)                     | 3.70                      |           | 3.70                      |           | 3.70                      |           | 3.70                      |           | 3.70                      |           |

■ Yes, model has this feature. – Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

<sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.


# Induction hobs

**iQ 500** ED877FWB5E

studioLine

Induction hob  
Black glass

90cm

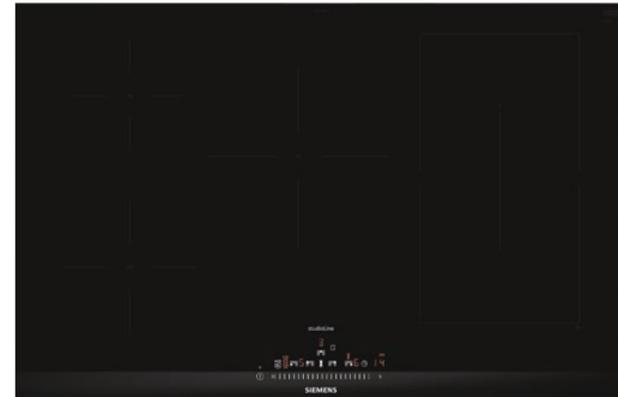

2  
Year Warranty



## Induction hob specifications

| APPLIANCE TYPE   | INDUCTION HOBS       |           |
|--|----------------------|-----------|
| Design family  | iQ 500               |           |
| Model number   | ED877FWB5E           |           |
| <b>DESIGN</b>  |                      |           |
| Width (mm)   | 812                  |           |
| Control position   | Front                |           |
| Control type   | touchSlider          |           |
| Style  | blackSteel side trim |           |
| <b>KEY FEATURES</b>  |                      |           |
| activeLight  | -                    |           |
| Home Connect   | -                    |           |
| cookConnect  | -                    |           |
| Full touch colour display  | -                    |           |
| cookingSensor plus <sup>1</sup>                                  | -                    |           |
| fryingSensor   | -                    |           |
| Number of flexInduction zones                                    | -                    |           |
| Extended flexInduction Zone <sup>2</sup>                         | -                    |           |
| Number of combiZones   | 1                    |           |
| powerBoost   | ■                    |           |
| panBoost   | -                    |           |
| powerMove  | 2 stages             |           |
| Automatic setting transfer                                       | -                    |           |
| <b>FEATURES</b>  |                      |           |
| Number of individual zones                                       | 5                    |           |
| Power levels   | 17                   |           |
| Digital display  | ■                    |           |
| Timer with automatic switch off for each zone                    | ■                    |           |
| Count up timer   | -                    |           |
| QuickStart   | ■                    |           |
| Energy consumption display                                       | ■                    |           |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                       |                      |           |
| Nominal voltage (V)  | 220-240              |           |
| Maximum power output (W)   | 7,400                |           |
| Electrical cable length (cm)                                     | 110                  |           |
| GB plug  | -                    |           |
| One continuous cooking zone – power (kW) / dimensions (mm)       | -                    |           |
| Rear left flexInduction zone – power (kW) / dimensions (mm)      | -                    |           |
| Rear left zone – power (kW) / diameter (mm)                      | 1.40                 | 145       |
| Rear right flexInduction zone – power (kW) / dimensions (mm)     | 2.20                 | 190 x 210 |
| Rear right zone – power (kW) / diameter (mm)                     | -                    | -         |
| Rear Centre zone – power (kW) / diameter (mm)                    | 2.20                 | 240       |
| Front Centre zone – power (kW) / diameter (mm)                   | -                    | -         |
| Front left flexInduction zone – power (kW) / dimensions (mm)     | -                    | -         |
| Front left zone – power (kW) / diameter (mm)                     | 1.80                 | 180       |
| Front right flexInduction zone – power (kW) / dimensions (mm)    | 2.20                 | 190 x 210 |
| Front right zone – power (kW) / diameter (mm)                    | -                    | -         |
| flexInduction Zone left – power (kW) / dimensions (mm)           | -                    | -         |
| flexInduction Zone right – power (kW) / dimensions (mm)          | 3.60                 | 380 x 210 |
| Extended flexInduction rear left – power (kW) / dimensions (mm)  | -                    | -         |
| Extended flexInduction rear right – power (kW) / dimensions (mm) | -                    | -         |
| CombiZone left – power (kW) / dimensions (mm)                    | -                    | -         |
| CombiZone right – power (kW) / dimensions (mm)                   | -                    | -         |
| Rear left zone – with powerBoost (max. kW)                       | 2.20                 | -         |
| Rear right zone – with powerBoost (max. kW)                      | 3.70                 | -         |
| Rear Centre zone – with powerBoost (max. kW)                     | 3.70                 | -         |
| Front Centre zone – with powerBoost (max. kW)                    | -                    | -         |
| Front left zone – with powerBoost (max. kW)                      | 3.10                 | -         |
| Front right zone – with powerBoost (max. kW)                     | 3.70                 | -         |

■ Yes, model has this feature. – Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

<sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

studioLine



studioLine



## Induction hob specifications

| APPLIANCE TYPE   | INDUCTION HOBS       |             |             |
|--|----------------------|-------------|-------------|
| Design family  | iQ 500               | iQ 500      | iQ 500      |
| Model number   | ED677FQC5E           | ED851FWB5E  | ED651FSB5E  |
| <b>DESIGN</b>  |                      |             |             |
| Width (mm)   | 602                  | 802         | 592         |
| Control position   | Front                | Front       | Front       |
| Control type   | touchSlider          | touchSlider | touchSlider |
| Style  | blackSteel side trim | Front bevel | Front bevel |
| <b>KEY FEATURES</b>  |                      |             |             |
| activeLight  | -                    | -           | -           |
| Home Connect   | -                    | -           | -           |
| cookConnect  | -                    | -           | -           |
| Full touch colour display  | -                    | -           | -           |
| cookingSensor plus <sup>1</sup>                                  | -                    | -           | -           |
| fryingSensor   | 4 settings           | -           | -           |
| Number of flexInduction zones                                    | -                    | -           | -           |
| Extended flexInduction Zone <sup>2</sup>                         | -                    | -           | -           |
| Number of combiZones   | 2                    | 1           | 1           |
| powerBoost   | ■                    | ■           | ■           |
| panBoost   | -                    | -           | -           |
| powerMove  | 2 stages             | 2 stages    | 2 stages    |
| Automatic setting transfer                                       | -                    | -           | -           |
| <b>FEATURES</b>  |                      |             |             |
| Number of individual zones                                       | 4                    | 5           | 4           |
| Power levels   | 17                   | 17          | 17          |
| Digital display  | ■                    | ■           | ■           |
| Timer with automatic switch off for each zone                    | ■                    | ■           | ■           |
| Count up timer   | -                    | -           | -           |
| QuickStart   | ■                    | ■           | ■           |
| Energy consumption display                                       | ■                    | ■           | ■           |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                       |                      |             |             |
| Nominal voltage (V)  | 220-240              | 220-240     | 220-240     |
| Maximum power output (W)   | 7,400                | 7,400       | 6,900       |
| Electrical cable length (cm)                                     | 110                  | 110         | 110         |
| GB plug  | -                    | -           | -           |
| One continuous cooking zone – power (kW) / dimensions (mm)       | -                    | -           | -           |
| Rear left flexInduction zone – power (kW) / dimensions (mm)      | 2.20                 | 190 x 210   | 2.20        |
| Rear left zone – power (kW) / diameter (mm)                      | -                    | -           | 1.40        |
| Rear right flexInduction zone – power (kW) / dimensions (mm)     | 2.20                 | 190 x 210   | 2.20        |
| Rear right zone – power (kW) / diameter (mm)                     | -                    | -           | 1.40        |
| Rear Centre zone – power (kW) / diameter (mm)                    | -                    | -           | 2.20        |
| Front Centre zone – power (kW) / diameter (mm)                   | -                    | -           | -           |
| Front left flexInduction zone – power (kW) / dimensions (mm)     | 2.20                 | 190 x 210   | 2.20        |
| Front left zone – power (kW) / diameter (mm)                     | -                    | -           | 1.80        |
| Front right flexInduction zone – power (kW) / dimensions (mm)    | 2.20                 | 190 x 210   | 2.20        |
| Front right zone – power (kW) / diameter (mm)                    | -                    | -           | 1.80        |
| flexInduction Zone left – power (kW) / dimensions (mm)           | 3.60                 | 380 x 210   | 3.60        |
| flexInduction Zone right – power (kW) / dimensions (mm)          | 3.60                 | 380 x 210   | 3.60        |
| Extended flexInduction rear left – power (kW) / dimensions (mm)  | -                    | -           | -           |
| Extended flexInduction rear right – power (kW) / dimensions (mm) | -                    | -           | -           |
| CombiZone left – power (kW) / dimensions (mm)                    | -                    | -           | -           |
| CombiZone right – power (kW) / dimensions (mm)                   | -                    | -           | -           |
| Rear left zone – with powerBoost (max. kW)                       | 3.70                 | 2.20        | 3.70        |
| Rear right zone – with powerBoost (max. kW)                      | 3.70                 | 3.70        | 2.20        |
| Rear Centre zone – with powerBoost (max. kW)                     | -                    | 3.70        | -           |
| Front Centre zone – with powerBoost (max. kW)                    | -                    | -           | -           |
| Front left zone – with powerBoost (max. kW)                      | 3.70                 | 3.10        | 3.70        |
| Front right zone – with powerBoost (max. kW)                     | 3.70                 | 3.70        | 3.10        |

■ Yes, model has this feature. – Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

<sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

Induction hob specifications



| APPLIANCE TYPE   | INDUCTION HOB |     |             |     |                    |     |                    |     |
|--|---------------|-----|-------------|-----|--------------------|-----|--------------------|-----|
| Design family  | iQ300         |     | iQ300       |     | iQ100              |     | iQ100              |     |
| Model number   | EH801FVB1E    |     | EH601FEB1E  |     | EH845FVB1E         |     | EH645FEB1E         |     |
| <b>DESIGN</b>  |               |     |             |     |                    |     |                    |     |
| Width (mm)   | 792           |     | 572         |     | 795                |     | 583                |     |
| Control position   | Front         |     | Front       |     | Front              |     | Front              |     |
| Control type   | touchSlider   |     | touchSlider |     | touchSlider        |     | touchSlider        |     |
| Style  | Flushline     |     | Flushline   |     | Premium steel trim |     | Premium steel trim |     |
| <b>KEY FEATURES</b>  |               |     |             |     |                    |     |                    |     |
| activeLight  | -             |     | -           |     | -                  |     | -                  |     |
| Home Connect   | -             |     | -           |     | -                  |     | -                  |     |
| cookConnect  | -             |     | -           |     | -                  |     | -                  |     |
| Full touch colour display  | -             |     | -           |     | -                  |     | -                  |     |
| cookingSensor plus <sup>1</sup>                                  | -             |     | -           |     | -                  |     | -                  |     |
| fryingSensor   | -             |     | -           |     | -                  |     | -                  |     |
| Number of flexInduction zones                                    | -             |     | -           |     | -                  |     | -                  |     |
| Extended flexInduction Zone <sup>2</sup>                         | -             |     | -           |     | -                  |     | -                  |     |
| Number of combiZones   | -             |     | -           |     | -                  |     | -                  |     |
| powerBoost   | ■             |     | ■           |     | ■                  |     | ■                  |     |
| panBoost   | -             |     | -           |     | -                  |     | -                  |     |
| powerMove  | -             |     | -           |     | -                  |     | -                  |     |
| Automatic setting transfer                                       | -             |     | -           |     | -                  |     | -                  |     |
| <b>FEATURES</b>  |               |     |             |     |                    |     |                    |     |
| Number of individual zones                                       | 5             |     | 4           |     | 5                  |     | 4                  |     |
| Power levels   | 17            |     | 17          |     | 17                 |     | 17                 |     |
| Digital display  | ■             |     | ■           |     | ■                  |     | ■                  |     |
| Timer with automatic switch off for each zone                    | ■             |     | ■           |     | ■                  |     | ■                  |     |
| Count up timer   | -             |     | -           |     | -                  |     | -                  |     |
| QuickStart   | ■             |     | ■           |     | ■                  |     | ■                  |     |
| Energy consumption display                                       | ■             |     | -           |     | ■                  |     | -                  |     |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                       |               |     |             |     |                    |     |                    |     |
| Nominal voltage (V)  | 220-240       |     | 220-240     |     | 220-240            |     | 220-240            |     |
| Maximum power output (W)   | 7,400         |     | 7,400       |     | 7,400              |     | 7,400              |     |
| Electrical cable length (cm)                                     | 110           |     | 110         |     | 110                |     | 110                |     |
| GB plug  | -             |     | -           |     | -                  |     | -                  |     |
| One continuous cooking zone – power (kW) / dimensions (mm)       | -             |     | -           |     | -                  |     | -                  |     |
| Rear left flexInduction zone – power (kW) / dimensions (mm)      | -             |     | -           |     | -                  |     | -                  |     |
| Rear left zone – power (kW) / diameter (mm)                      | 1.40          | 145 | 1.80        | 180 | 1.40               | 145 | 1.80               | 180 |
| Rear right flexInduction zone – power (kW) / dimensions (mm)     | -             |     | -           |     | -                  |     | -                  |     |
| Rear right zone – power (kW) / diameter (mm)                     | 1.40          | 145 | 1.40        | 145 | 1.40               | 145 | 1.40               | 145 |
| Rear Centre zone – power (kW) / diameter (mm)                    | 2.20          | 240 | -           | -   | 2.20               | 240 | -                  | -   |
| Front Centre zone – power (kW) / diameter (mm)                   | -             |     | -           |     | -                  |     | -                  |     |
| Front left flexInduction zone – power (kW) / dimensions (mm)     | -             |     | -           |     | -                  |     | -                  |     |
| Front left zone – power (kW) / diameter (mm)                     | 1.80          | 180 | 1.80        | 180 | 1.80               | 180 | 1.80               | 180 |
| Front right flexInduction zone – power (kW) / dimensions (mm)    | -             |     | -           |     | -                  |     | -                  |     |
| Front right zone – power (kW) / diameter (mm)                    | 2.20          | 210 | 2.20        | 210 | 2.20               | 210 | 2.20               | 210 |
| flexInduction Zone left – power (kW) / dimensions (mm)           | -             |     | -           |     | -                  |     | -                  |     |
| flexInduction Zone right – power (kW) / dimensions (mm)          | -             |     | -           |     | -                  |     | -                  |     |
| Extended flexInduction rear left – power (kW) / dimensions (mm)  | -             |     | -           |     | -                  |     | -                  |     |
| Extended flexInduction rear right – power (kW) / dimensions (mm) | -             |     | -           |     | -                  |     | -                  |     |
| CombiZone left – power (kW) / dimensions (mm)                    | -             |     | -           |     | -                  |     | -                  |     |
| CombiZone right – power (kW) / dimensions (mm)                   | -             |     | -           |     | -                  |     | -                  |     |
| Rear left zone – with powerBoost (max. kW)                       | 2.20          | -   | 3.10        | -   | 2.20               | -   | 3.10               | -   |
| Rear right zone – with powerBoost (max. kW)                      | 2.20          | -   | 2.20        | -   | 2.20               | -   | 2.20               | -   |
| Rear Centre zone – with powerBoost (max. kW)                     | 3.70          | -   | -           | -   | 3.70               | -   | -                  | -   |
| Front Centre zone – with powerBoost (max. kW)                    | -             |     | -           |     | -                  |     | -                  |     |
| Front left zone – with powerBoost (max. kW)                      | 3.10          | -   | 3.10        | -   | 3.10               | -   | 3.10               | -   |
| Front right zone – with powerBoost (max. kW)                     | 3.70          | -   | 3.70        | -   | 3.70               | -   | 3.70               | -   |

■ Yes, model has this feature. – Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

<sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

Induction hob specifications



| APPLIANCE TYPE   | INDUCTION HOB |     |               |     |               |     |
|--|---------------|-----|---------------|-----|---------------|-----|
| Design family  | iQ100         |     | iQ100         |     | iQ100         |     |
| Model number   | EU631FEB1E    |     | EU611BEB1E    |     | EU631BEF1B    |     |
| <b>DESIGN</b>  |               |     |               |     |               |     |
| Width (mm)   | 592           |     | 592           |     | 592           |     |
| Control position   | Front         |     | Front         |     | Front         |     |
| Control type   | touchSlider   |     | Touch Control |     | Touch Control |     |
| Style  | Front bevel   |     | Frameless     |     | Front bevel   |     |
| <b>KEY FEATURES</b>  |               |     |               |     |               |     |
| activeLight  | -             |     | -             |     | -             |     |
| Home Connect   | -             |     | -             |     | -             |     |
| cookConnect  | -             |     | -             |     | -             |     |
| Full touch colour display  | -             |     | -             |     | -             |     |
| cookingSensor plus <sup>1</sup>                                  | -             |     | -             |     | -             |     |
| fryingSensor   | -             |     | -             |     | -             |     |
| Number of flexInduction zones                                    | -             |     | -             |     | -             |     |
| Extended flexInduction Zone <sup>2</sup>                         | -             |     | -             |     | -             |     |
| Number of combiZones   | -             |     | -             |     | -             |     |
| powerBoost   | ■             |     | ■             |     | ■             |     |
| panBoost   | -             |     | -             |     | -             |     |
| powerMove  | -             |     | -             |     | -             |     |
| Automatic setting transfer                                       | -             |     | -             |     | -             |     |
| <b>FEATURES</b>  |               |     |               |     |               |     |
| Number of individual zones                                       | 4             |     | 4             |     | 4             |     |
| Power levels   | 17            |     | 17            |     | 17            |     |
| Digital display  | ■             |     | ■             |     | ■             |     |
| Timer with automatic switch off for each zone                    | ■             |     | ■             |     | ■             |     |
| Count up timer   | -             |     | -             |     | -             |     |
| QuickStart   | ■             |     | ■             |     | ■             |     |
| Energy consumption display                                       | -             |     | -             |     | -             |     |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                       |               |     |               |     |               |     |
| Nominal voltage (V)  | 220-240       |     | 220-240       |     | 220-240       |     |
| Maximum power output (W)   | 4,600         |     | 4,600         |     | 3,000         |     |
| Electrical cable length (cm)                                     | 110           |     | 110           |     | 110           |     |
| GB plug  | -             |     | -             |     | ■             |     |
| One continuous cooking zone – power (kW) / dimensions (mm)       | -             |     | -             |     | -             |     |
| Rear left flexInduction zone – power (kW) / dimensions (mm)      | -             |     | -             |     | -             |     |
| Rear left zone – power (kW) / diameter (mm)                      | 1.80          | 180 | 1.80          | 180 | 1.80          | 180 |
| Rear right flexInduction zone – power (kW) / dimensions (mm)     | -             |     | -             |     | -             |     |
| Rear right zone – power (kW) / diameter (mm)                     | 1.40          | 145 | 1.40          | 145 | 1.40          | 145 |
| Rear Centre zone – power (kW) / diameter (mm)                    | -             |     | -             |     | -             |     |
| Front Centre zone – power (kW) / diameter (mm)                   | -             |     | -             |     | -             |     |
| Front left flexInduction zone – power (kW) / dimensions (mm)     | -             |     | -             |     | -             |     |
| Front left zone – power (kW) / diameter (mm)                     | 1.80          | 180 | 1.80          | 180 | 1.80          | 180 |
| Front right flexInduction zone – power (kW) / dimensions (mm)    | -             |     | -             |     | -             |     |
| Front right zone – power (kW) / diameter (mm)                    | 2.20          | 210 | 2.20          | 210 | 2.20          | 210 |
| flexInduction Zone left – power (kW) / dimensions (mm)           | -             |     | -             |     | -             |     |
| flexInduction Zone right – power (kW) / dimensions (mm)          | -             |     | -             |     | -             |     |
| Extended flexInduction rear left – power (kW) / dimensions (mm)  | -             |     | -             |     | -             |     |
| Extended flexInduction rear right – power (kW) / dimensions (mm) | -             |     | -             |     | -             |     |
| CombiZone left – power (kW) / dimensions (mm)                    | -             |     | -             |     | -             |     |
| CombiZone right – power (kW) / dimensions (mm)                   | -             |     | -             |     | -             |     |
| Rear left zone – with powerBoost (max. kW)                       | 3.10          | -   | 3.10          | -   | 3.10          | -   |
| Rear right zone – with powerBoost (max. kW)                      | 2.20          | -   | 2.20          | -   | 2.20          | -   |
| Rear Centre zone – with powerBoost (max. kW)                     | -             |     | -             |     | -             |     |
| Front Centre zone – with powerBoost (max. kW)                    | -             |     | -             |     | -             |     |
| Front left zone – with powerBoost (max. kW)                      | 3.10          | -   | 3.10          | -   | 3.10          | -   |
| Front right zone – with powerBoost (max. kW)                     | 3.70          | -   | 3.70          | -   | 3.70          | -   |

■ Yes, model has this feature. – Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

<sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

# quickLite ceramic hobs

## iQ 300 ET875FCP1D

Ceramic hob  
Black glass

80cm



2  
Year Warranty



### quickLite ceramic hob specifications

| APPLIANCE TYPE   |                             | QUICKLITE CERAMIC HOB |     |
|--|-----------------------------|-----------------------|-----|
| Design family  |                             | iQ 300                |     |
| Model number   | Black glass with steel trim | -                     |     |
|  | Black glass                 | ET875FCP1D            |     |
|  | Metal-look glass            | -                     |     |
|  | Stainless steel             | -                     |     |
| DESIGN CHARACTERISTICS   |                             |                       |     |
| Hob width (mm)   |                             | 812                   |     |
| Side controls  |                             | -                     |     |
| Front controls   |                             | ■                     |     |
| Control dials  |                             | -                     |     |
| touchControl   |                             | -                     |     |
| touchSlider operation  |                             | ■                     |     |
| All-around trim  |                             | -                     |     |
| Three-sided bevelled frameless finish                              |                             | -                     |     |
| Flush-fitting design / installation                                |                             | -                     |     |
| Design trim (front facette with side trim)                         |                             | -                     |     |
| Bevelled front   |                             | ■                     |     |
| Can be installed with a Siemens Domino hob                         |                             | -                     |     |
| KEY FEATURES   |                             |                       |     |
| Electronic control   |                             | ■                     |     |
| Electronic power level display                                     |                             | ■                     |     |
| Automatic safety switch off  |                             | ■                     |     |
| Control panel lock   |                             | ■                     |     |
| Super boost function   |                             | -                     |     |
| powerBoost setting   |                             | ■                     |     |
| quickStart   |                             | ■                     |     |
| reStart  |                             | ■                     |     |
| Energy consumption display   |                             | -                     |     |
| Automatic pan recognition  |                             | -                     |     |
| Power management function  |                             | -                     |     |
| Connection current management                                      |                             | -                     |     |
| FEATURES   |                             |                       |     |
| Number of power levels   |                             | 17                    |     |
| Main on/off switch   |                             | ■                     |     |
| Timer for all zones  |                             | ■                     |     |
| Two stage residual heat indicators (H/h)                           |                             | ■                     |     |
| Control panel pause  |                             | ■                     |     |
| PERFORMANCE / TECHNICAL INFORMATION                                |                             |                       |     |
| Number of cooking zones  |                             | 4                     |     |
| Number of flexInduction zones                                      |                             | -                     |     |
| Number of dual / extendible zones                                  |                             | 2                     |     |
| Number of triple / extendible zones                                |                             | -                     |     |
| Left zones flexInduction connected – power (kW) / dimensions (mm)  |                             | -                     | -   |
| Right zones flexInduction connected – power (kW) / dimensions (mm) |                             | -                     | -   |
| Centre zones flexInduction – power (kW) / dimensions (mm)          |                             | -                     | -   |
| Left front zone – power (kW) / dimensions (mm)                     |                             | 2.1                   | 210 |
| Left rear zone – power (kW) / dimensions (mm)                      |                             | 2.1                   | 145 |
| Centre front zone – power (kW) / dimensions (mm)                   |                             | -                     | -   |
| Centre rear zone – power (kW) / dimensions (mm)                    |                             | 2.4                   | 230 |
| Right front zone – power (kW) / dimensions (mm)                    |                             | 2.1                   | 350 |
| Right rear zone – power (kW) / dimensions (mm)                     |                             | -                     | -   |
| Nominal voltage (V)  |                             | 220-240               |     |
| Total connected electrical load (W)                                |                             | 9,300                 |     |
| Cable length (cm)  |                             | 110                   |     |
| GB plug  |                             | -                     |     |
| Appliance weight (kg)  |                             | 10                    |     |
| Safety approved  |                             | ■                     |     |

■ Yes, model has this feature. – Feature not available for this model.  
All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.



### quickLite ceramic hob specifications

| APPLIANCE TYPE   |                             | QUICKLITE CERAMIC HOB |     |            |     |
|--|-----------------------------|-----------------------|-----|------------|-----|
| Design family  |                             | iQ 100                |     | iQ 100     |     |
| Model number   | Black glass with steel trim | -                     |     | ET645CEA1E |     |
|  | Black glass                 | ET651HE17E            |     | -          |     |
|  | Metal-look glass            | -                     |     | -          |     |
|  | Stainless steel             | -                     |     | -          |     |
| DESIGN CHARACTERISTICS   |                             |                       |     |            |     |
| Hob width (mm)   |                             | 592                   |     | 583        |     |
| Side controls  |                             | -                     |     | ■          |     |
| Front controls   |                             | ■                     |     | -          |     |
| Control dials  |                             | -                     |     | ■          |     |
| touchControl   |                             | -                     |     | -          |     |
| touchSlider operation  |                             | -                     |     | -          |     |
| All-around trim  |                             | -                     |     | ■          |     |
| Three-sided bevelled frameless finish                              |                             | ■                     |     | -          |     |
| Flush-fitting design / installation                                |                             | -                     |     | -          |     |
| Design trim (front facette with side trim)                         |                             | -                     |     | -          |     |
| Bevelled front   |                             | -                     |     | -          |     |
| Can be installed with a Siemens Domino hob                         |                             | -                     |     | -          |     |
| KEY FEATURES   |                             |                       |     |            |     |
| Electronic control   |                             | ■                     |     | -          |     |
| Electronic power level display                                     |                             | ■                     |     | -          |     |
| Automatic safety switch off  |                             | ■                     |     | -          |     |
| Control panel lock   |                             | ■                     |     | -          |     |
| Super boost function   |                             | -                     |     | -          |     |
| powerBoost setting   |                             | -                     |     | -          |     |
| quickStart   |                             | -                     |     | -          |     |
| reStart  |                             | ■                     |     | -          |     |
| Energy consumption display   |                             | -                     |     | -          |     |
| Automatic pan recognition  |                             | -                     |     | -          |     |
| Power management function  |                             | -                     |     | -          |     |
| Connection current management                                      |                             | -                     |     | -          |     |
| FEATURES   |                             |                       |     |            |     |
| Number of power levels   |                             | 17                    |     | 9          |     |
| Main on/off switch   |                             | ■                     |     | -          |     |
| Timer for all zones  |                             | -                     |     | -          |     |
| Two stage residual heat indicators (H/h)                           |                             | ■                     |     | ■          |     |
| Control panel pause  |                             | -                     |     | -          |     |
| PERFORMANCE / TECHNICAL INFORMATION                                |                             |                       |     |            |     |
| Number of cooking zones  |                             | 4                     |     | 4          |     |
| Number of flexInduction zones                                      |                             | -                     |     | -          |     |
| Number of dual / extendible zones                                  |                             | -                     |     | -          |     |
| Number of triple / extendible zones                                |                             | -                     |     | -          |     |
| Left zones flexInduction connected – power (kW) / dimensions (mm)  |                             | -                     | -   | -          | -   |
| Right zones flexInduction connected – power (kW) / dimensions (mm) |                             | -                     | -   | -          | -   |
| Centre zones flexInduction – power (kW) / dimensions (mm)          |                             | -                     | -   | -          | -   |
| Left front zone – power (kW) / dimensions (mm)                     |                             | 1.2                   | 145 | 1.2        | 145 |
| Left rear zone – power (kW) / dimensions (mm)                      |                             | 2.0                   | 180 | 2.2        | 210 |
| Centre front zone – power (kW) / dimensions (mm)                   |                             | -                     | -   | -          | -   |
| Centre rear zone – power (kW) / dimensions (mm)                    |                             | -                     | -   | -          | -   |
| Right front zone – power (kW) / dimensions (mm)                    |                             | 2.2                   | 210 | 2.0        | 180 |
| Right rear zone – power (kW) / dimensions (mm)                     |                             | 1.2                   | 145 | 1.2        | 145 |
| Nominal voltage (V)  |                             | 220-240               |     | 220-240    |     |
| Total connected electrical load (W)                                |                             | 6,600                 |     | 6,600      |     |
| Cable length (cm)  |                             | -                     |     | -          |     |
| GB plug  |                             | -                     |     | -          |     |
| Appliance weight (kg)  |                             | 7.0                   |     | 8.0        |     |
| Safety approved  |                             | ■                     |     | ■          |     |


■ Yes, model has this feature. – Feature not available for this model.  
All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

# Gas hobs

## iQ 700 ER9A6SD70

Gas hob  
Black ceramic glass

90cm

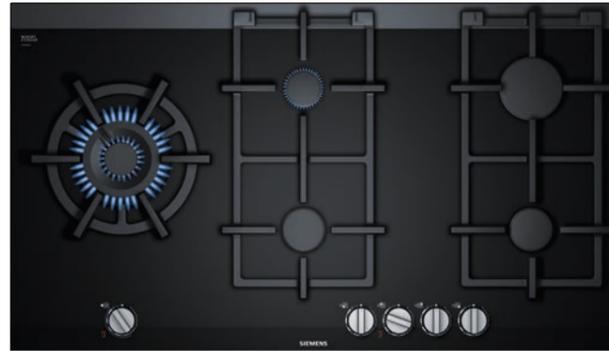

2  
Year Warranty



**stepFlame technology**  
Introducing the ground-breaking innovation in gas hobs: stepFlame. Offering 9 precise power levels to give you the control of an electric hob, with gas.

### Gas hob specifications



| APPLIANCE TYPE   |  | GAS HOB             |  |
|--|--|---------------------|--|
| <b>Design family</b>                                     |  | <b>iQ 700</b>       |  |
| Model number   | Stainless steel / stainless steel trim | ER9A6SD70           |  |
|  | Black / premium black                  | -                   |  |
|  | White / premium white                  | -                   |  |
| <b>DESIGN</b>  |  |                     |  |
| Width (mm)   |  | 912                 |  |
| Control position   |  | Front               |  |
| <b>KEY FEATURES</b>                                      |  |                     |  |
| stepFlame technology                                     |  | ■                   |  |
| Digital power level display                              |  | ■                   |  |
| Number of dual circuit wok style burners <sup>1</sup>    |  | 1                   |  |
| High power (5.0kW+) wok burner <sup>2</sup>              |  | ■                   |  |
| Dual control wok burner <sup>3</sup>                     |  | ■                   |  |
| 'Diamond' shape burner layout <sup>4</sup>               |  | -                   |  |
| Dishwasher safe pan supports <sup>5</sup>                |  | ■                   |  |
| Hob surface type   |  | Ceramic glass       |  |
| <b>FEATURES</b>  |  |                     |  |
| Number of cooking zones                                  |  | 4                   |  |
| Individual power levels                                  |  | 9                   |  |
| Variable power levels                                    |  | -                   |  |
| Ignition via control dials                               |  | ■                   |  |
| Flame-failure safety device                              |  | ■                   |  |
| Cast iron pan supports (number)                          |  | 3 x dishwasher safe |  |
| Cast iron finish pan supports (number)ww                 |  | -                   |  |
| Enamelled steel pan supports (number)                    |  | -                   |  |
| Low profile single piece burners                         |  | ■                   |  |
| Two piece burners  |  | -                   |  |
| Comfort profile  |  | ■                   |  |
| Can be combined with other models with comfort profile   |  | ■                   |  |
| Installation flush with work top possible                |  | -                   |  |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>               |  |                     |  |
| Nominal voltage (V)                                      |  | 220-240             |  |
| Maximum gas power output load (W)                        |  | 13,700              |  |
| Total connected electrical load (W)                      |  | 2.0                 |  |
| Cable length (cm)  |  | 150                 |  |
| GB plug  |  | -                   |  |
| Left burner power (kW)                                   |  | 6.00                |  |
| Front left burner power (kW)                             |  | 1.10                |  |
| Back left burner power (kW)                              |  | 1.90                |  |
| Centre/centre front burner power (kW)                    |  | -                   |  |
| Centre back burner power (kW)                            |  | -                   |  |
| Front right burner power (kW)                            |  | 1.90                |  |
| Back right burner power (kW)                             |  | 2.80                |  |
| Right burner power (kW)                                  |  | -                   |  |
| Pre-set for natural gas                                  |  | ■                   |  |
| CE Marked  |  | ■                   |  |
| <b>STANDARD ACCESSORIES</b>                              |  |                     |  |
| Wok stand <sup>6</sup>                                   |  | ■                   |  |
| LPG jets   |  | 28-30 / 37mbar      |  |
| <b>OPTIONAL ACCESSORIES</b>                              |  |                     |  |
| Connecting strip to link to other comfort profile models |  | HZ394301            |  |

■ Yes, model has this feature. - Feature not available for this model.  
All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring.  
<sup>2</sup>High power output for rapid heating – especially valuable for flash and wok frying.  
<sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently.  
<sup>4</sup>Diamond refers to the visual layout of the burners – i.e. Diamond shape as opposed to normal square layout for 60cm hobs.  
Diamond layout offers:  
– greater convenience / accessibility with 2 large pans at the same time.  
– compared to models with wok on the rear zones, you can work with larger diameter wok pans without touching the rear wall and forcing the pan off centre over the burner.  
– no need to reach over front zones to access the higher power burners.  
– compared with a model with a wok at the front left there is a safety argument as it offers a good compromise between easy access and child safety.  
– compared to wok front level, the extra distance to control dials allows a higher power wok burner to be used without making the controls too hot and offering added convenience in terms of power available.  
<sup>5</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.  
<sup>6</sup>For round based pans.

### Gas hob specifications



| APPLIANCE TYPE   |  | GAS HOBS            |                     |                |                |
|--|--|---------------------|---------------------|----------------|----------------|
| <b>Design family</b>                                     |  | <b>iQ 700</b>       | <b>iQ 700</b>       | <b>iQ 500</b>  | <b>iQ 500</b>  |
| Model number   | Stainless steel / stainless steel trim | ER7A6RD70           | ER6A6PD70           | -              | -              |
|  | Black / premium black                  | -                   | -                   | EP9A6S890      | EP7A6QB90      |
|  | White / premium white                  | -                   | -                   | -              | -              |
| <b>DESIGN</b>  |  |                     |                     |                |                |
| Width (mm)   |  | 750                 | 602                 | 915            | 752            |
| Control position   |  | Front               | Front               | Front          | Front          |
| <b>KEY FEATURES</b>                                      |  |                     |                     |                |                |
| stepFlame technology                                     |  | ■                   | ■                   | ■              | ■              |
| Digital power level display                              |  | ■                   | ■                   | -              | -              |
| Number of dual circuit wok style burners <sup>1</sup>    |  | 1                   | 1                   | 1              | 1              |
| High power (5.0kW+) wok burner <sup>2</sup>              |  | -                   | -                   | -              | -              |
| Dual control wok burner <sup>3</sup>                     |  | -                   | -                   | -              | -              |
| 'Diamond' shape burner layout <sup>4</sup>               |  | -                   | -                   | -              | -              |
| Dishwasher safe pan supports <sup>5</sup>                |  | ■                   | ■                   | -              | -              |
| Hob surface type   |  | Ceramic glass       | Ceramic glass       | Tempered glass | Tempered glass |
| <b>FEATURES</b>  |  |                     |                     |                |                |
| Number of cooking zones                                  |  | 4                   | 4                   | 5              | 5              |
| Individual power levels                                  |  | 9                   | 9                   | 9              | 9              |
| Variable power levels                                    |  | -                   | -                   | -              | -              |
| Ignition via control dials                               |  | ■                   | ■                   | ■              | ■              |
| Flame-failure safety device                              |  | ■                   | ■                   | ■              | ■              |
| Cast iron pan supports (number)                          |  | 2 x dishwasher safe | 2 x dishwasher safe | 5              | 5              |
| Cast iron finish pan supports (number)ww                 |  | -                   | -                   | -              | -              |
| Enamelled steel pan supports (number)                    |  | -                   | -                   | -              | -              |
| Low profile single piece burners                         |  | ■                   | ■                   | -              | -              |
| Two piece burners  |  | -                   | -                   | ■              | ■              |
| Comfort profile  |  | ■                   | ■                   | -              | -              |
| Can be combined with other models wwith comfort profile  |  | ■                   | ■                   | -              | -              |
| Installation flush with work top possible                |  | -                   | -                   | ■              | ■              |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>               |  |                     |                     |                |                |
| Nominal voltage (V)                                      |  | 220-240             | 220-240             | 220-240        | 220-240        |
| Maximum gas power output load (W)                        |  | 11,900              | 7,700               | 11,500         | 11,500         |
| Total connected electrical load (W)                      |  | 2.0                 | 2.0                 | 1.0            | 1.0            |
| Cable length (cm)  |  | 100                 | 100                 | 150            | 100            |
| GB plug  |  | -                   | -                   | -              | -              |
| Left burner power (kW)                                   |  | -                   | -                   | 4.00           | -              |
| Front left burner power (kW)                             |  | 1.90                | 1.10                | -              | 1.00           |
| Back left burner power (kW)                              |  | 1.90                | 1.90                | -              | 1.75           |
| Centre/centre front burner power (kW)                    |  | 4.20                | -                   | 1.00           | 4.00           |
| Centre back burner power (kW)                            |  | -                   | -                   | 1.75           | -              |
| Front right burner power (kW)                            |  | 1.10                | 1.90                | 1.75           | 1.75           |
| Back right burner power (kW)                             |  | 2.80                | 2.80                | 3.00           | 3.00           |
| Right burner power (kW)                                  |  | -                   | -                   | -              | -              |
| Pre-set for natural gas                                  |  | ■                   | ■                   | ■              | ■              |
| CE Marked  |  | ■                   | ■                   | ■              | ■              |
| <b>STANDARD ACCESSORIES</b>                              |  |                     |                     |                |                |
| Wok stand <sup>6</sup>                                   |  | ■                   | -                   | -              | -              |
| LPG jets   |  | 28-30 / 37mbar      | 28-30 / 37mbar      | 28-30 / 37mbar | 28-30 / 37mbar |
| <b>OPTIONAL ACCESSORIES</b>                              |  |                     |                     |                |                |
| Connecting strip to link to other comfort profile models |  | HZ394301            | HZ394301            | -              | -              |

■ Yes, model has this feature. - Feature not available for this model.  
All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring.  
<sup>2</sup>High power output for rapid heating – especially valuable for flash and wok frying.  
<sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently.  
<sup>4</sup>Diamond refers to the visual layout of the burners – i.e. Diamond shape as opposed to normal square layout for 60cm hobs.  
Diamond layout offers:  
– greater convenience / accessibility with 2 large pans at the same time.  
– compared to models with wok on the rear zones, you can work with larger diameter wok pans without touching the rear wall and forcing the pan off centre over the burner.  
– no need to reach over front zones to access the higher power burners.  
– compared with a model with a wok at the front left there is a safety argument as it offers a good compromise between easy access and child safety.  
– compared to wok front level, the extra distance to control dials allows a higher power wok burner to be used without making the controls too hot and offering added convenience in terms of power available.  
<sup>5</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.  
<sup>6</sup>For round based pans.

Gas hob specifications



| APPLIANCE TYPE   | GAS HOBS                               |                 |                 |                 |
|--|--|-----------------|-----------------|-----------------|
| Design family  | IQ500                                  | IQ500           | IQ500           | IQ500           |
| Model number   | Stainless steel / stainless steel trim | EC9A5SB90       | EC7A5RB90       | EC6A5HC90       |
|  | Black / premium black                  | EP6A6HB20       | –               | –               |
|  | White / premium white                  | –               | –               | –               |
| <b>DESIGN</b>  |  |                 |                 |                 |
| Width (mm)   | 590                                    | 915             | 750             | 582             |
| Control position   | Front                                  | Front           | Front           | Front           |
| <b>KEY FEATURES</b>                                      |  |                 |                 |                 |
| stepFlame technology                                     | ■                                      | ■               | ■               | ■               |
| Digital power level display                              | –                                      | –               | –               | –               |
| Number of dual circuit wok style burners <sup>1</sup>    | 1                                      | 1               | 1               | 1               |
| High power (5.0kW+) wok burner <sup>2</sup>              | –                                      | ■               | ■               | –               |
| Dual control wok burner <sup>3</sup>                     | –                                      | ■               | ■               | –               |
| 'Diamond' shape burner layout <sup>4</sup>               | –                                      | –               | –               | –               |
| Dishwasher safe pan supports <sup>5</sup>                | –                                      | –               | –               | –               |
| Hob surface type   | Black tempered glass                   | Stainless steel | Stainless steel | Stainless steel |
| <b>FEATURES</b>  |  |                 |                 |                 |
| Number of cooking zones                                  | 4                                      | 5               | 5               | 4               |
| Individual power levels                                  | 9                                      | 9               | 9               | 9               |
| Variable power levels                                    | –                                      | –               | –               | –               |
| Ignition via control dials                               | ■                                      | ■               | ■               | ■               |
| Flame-failure safety device                              | ■                                      | ■               | ■               | ■               |
| Cast iron pan supports (number)                          | 4                                      | 3               | 3               | 2               |
| Cast iron finish pan supports (number)ww                 | –                                      | –               | –               | –               |
| Enamelled steel pan supports (number)                    | –                                      | –               | –               | –               |
| Low profile single piece burners                         | –                                      | –               | –               | –               |
| Two piece burners  | ■                                      | ■               | ■               | ■               |
| Comfort profile  | –                                      | –               | –               | –               |
| Can be combined with other models with comfort profile   | –                                      | –               | –               | –               |
| Installation flush with work top possible                | ■                                      | –               | –               | –               |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>               |  |                 |                 |                 |
| Nominal voltage (V)                                      | 220-240                                | 220-240         | 220-240         | 220-240         |
| Maximum gas power output load (W)                        | 8,000                                  | 12,500          | 12,500          | 8,000           |
| Total connected electrical load (W)                      | 1.0                                    | 1.0             | 1.0             | 1.0             |
| Cable length (cm)  | 100                                    | 100             | 100             | 100             |
| GB plug  | –                                      | –               | –               | –               |
| Left burner power (kW)                                   | –                                      | 5.00            | –               | –               |
| Front left burner power (kW)                             | 1.75                                   | –               | 1.00            | 1.75            |
| Back left burner power (kW)                              | 1.75                                   | –               | 1.75            | 1.75            |
| Centre/centre front burner power (kW)                    | –                                      | 1.00            | 5.00            | –               |
| Centre back burner power (kW)                            | –                                      | 1.75            | –               | –               |
| Front right burner power (kW)                            | 1.00                                   | 1.75            | 1.75            | 1.00            |
| Back right burner power (kW)                             | 3.50                                   | 3.00            | 3.00            | 3.30            |
| Right burner power (kW)                                  | –                                      | –               | –               | –               |
| Pre-set for natural gas                                  | ■                                      | ■               | ■               | ■               |
| CE Marked  | ■                                      | ■               | ■               | ■               |
| <b>STANDARD ACCESSORIES</b>                              |  |                 |                 |                 |
| Wok stand <sup>6</sup>                                   | –                                      | –               | –               | –               |
| LPG jets   | 28-30 / 37mbar                         | 28-30 / 37mbar  | 28-30 / 37mbar  | 28-30 / 37mbar  |
| <b>OPTIONAL ACCESSORIES</b>                              |  |                 |                 |                 |
| Connecting strip to link to other comfort profile models | –                                      | –               | –               | –               |

■ Yes, model has this feature. – Feature not available for this model.  
 All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring.  
<sup>2</sup>High power output for rapid heating – especially valuable for flash and wok frying.  
<sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently.  
<sup>4</sup>Diamond refers to the visual layout of the burners – i.e. Diamond shape as opposed to normal square layout for 60cm hobs.  
 Diamond layout offers:  
 – greater convenience / accessibility with 2 large pans at the same time.  
 – compared to models with wok on the rear zones, you can work with larger diameter wok pans without touching the rear wall and forcing the pan off centre over the burner.  
 – no need to reach over front zones to access the higher power burners.  
 – compared with a model with a wok at the front left there is a safety argument as it offers a good compromise between easy access and child safety.  
 – compared to wok front level, the extra distance to control dials allows a higher power wok burner to be used without making the controls too hot and offering added convenience in terms of power available.  
<sup>5</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.  
<sup>6</sup>For round based pans.

Gas hob specifications



| APPLIANCE TYPE   | GAS HOBS                               |                 |                 |                 |
|--|--|-----------------|-----------------|-----------------|
| Design family  | IQ500                                  | IQ300           | IQ100           | IQ100           |
| Model number   | Stainless steel / stainless steel trim | EC6A5PB90       | EG7B5QB90       | EB6B5PB60       |
|  | Black / premium black                  | –               | –               | –               |
|  | White / premium white                  | –               | –               | –               |
| <b>DESIGN</b>  |  |                 |                 |                 |
| Width (mm)   | 582                                    | 750             | 580             | 580             |
| Control position   | Front                                  | Front           | Right side      | Right side      |
| <b>KEY FEATURES</b>                                      |  |                 |                 |                 |
| stepFlame technology                                     | ■                                      | –               | –               | –               |
| Digital power level display                              | –                                      | –               | –               | –               |
| Number of dual circuit wok style burners <sup>1</sup>    | –                                      | 1               | 1               | –               |
| High power (5.0kW+) wok burner <sup>2</sup>              | –                                      | ■               | –               | –               |
| Dual control wok burner <sup>3</sup>                     | –                                      | ■               | –               | –               |
| 'Diamond' shape burner layout <sup>4</sup>               | –                                      | –               | –               | –               |
| Dishwasher safe pan supports <sup>5</sup>                | –                                      | ■               | –               | –               |
| Hob surface type   | Stainless steel                        | Stainless steel | Stainless steel | Stainless steel |
| <b>FEATURES</b>  |  |                 |                 |                 |
| Number of cooking zones                                  | 4                                      | 5               | 4               | 4               |
| Individual power levels                                  | 9                                      | –               | –               | –               |
| Variable power levels                                    | –                                      | ■               | ■               | ■               |
| Ignition via control dials                               | ■                                      | ■               | ■               | ■               |
| Flame-failure safety device                              | ■                                      | ■               | ■               | ■               |
| Cast iron pan supports (number)                          | 2                                      | 3               | –               | –               |
| Cast iron finish pan supports (number)ww                 | –                                      | –               | 2               | 2               |
| Enamelled steel pan supports (number)                    | –                                      | –               | –               | –               |
| Low profile single piece burners                         | –                                      | –               | –               | –               |
| Two piece burners  | ■                                      | ■               | ■               | ■               |
| Comfort profile  | –                                      | –               | –               | –               |
| Can be combined with other models with comfort profile   | –                                      | –               | –               | –               |
| Installation flush with work top possible                | –                                      | –               | –               | –               |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>               |  |                 |                 |                 |
| Nominal voltage (V)                                      | 220-240                                | 220-240         | 220-240         | 220-240         |
| Maximum gas power output load (W)                        | 7,500                                  | 10,800          | 7,700           | 7,400           |
| Total connected electrical load (W)                      | 1.0                                    | 1.0             | 1.0             | 1.0             |
| Cable length (cm)  | 100                                    | 150             | 100             | 100             |
| GB plug  | –                                      | –               | –               | –               |
| Left burner power (kW)                                   | –                                      | –               | –               | –               |
| Front left burner power (kW)                             | 1.75                                   | 1.00            | 3.30            | 3.00            |
| Back left burner power (kW)                              | 1.75                                   | 1.75            | 1.70            | 1.70            |
| Centre/centre front burner power (kW)                    | –                                      | 3.30            | –               | –               |
| Centre back burner power (kW)                            | –                                      | –               | –               | –               |
| Front right burner power (kW)                            | 1.00                                   | 1.75            | 1.00            | 1.00            |
| Back right burner power (kW)                             | 3.00                                   | 3.00            | 1.70            | 1.70            |
| Right burner power (kW)                                  | –                                      | –               | –               | –               |
| Pre-set for natural gas                                  | ■                                      | ■               | ■               | ■               |
| CE Marked  | ■                                      | ■               | ■               | ■               |
| <b>STANDARD ACCESSORIES</b>                              |  |                 |                 |                 |
| Wok stand <sup>6</sup>                                   | –                                      | –               | –               | –               |
| LPG jets   | 28-30 / 37mbar                         | 28-30 / 37mbar  | 28-30 / 37mbar  | 28-30 / 37mbar  |
| <b>OPTIONAL ACCESSORIES</b>                              |  |                 |                 |                 |
| Connecting strip to link to other comfort profile models | –                                      | –               | –               | –               |

■ Yes, model has this feature. – Feature not available for this model.  
 All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring.  
<sup>2</sup>High power output for rapid heating – especially valuable for flash and wok frying.  
<sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently.  
<sup>4</sup>Diamond refers to the visual layout of the burners – i.e. Diamond shape as opposed to normal square layout for 60cm hobs.  
 Diamond layout offers:  
 – greater convenience / accessibility with 2 large pans at the same time.  
 – compared to models with wok on the rear zones, you can work with larger diameter wok pans without touching the rear wall and forcing the pan off centre over the burner.  
 – no need to reach over front zones to access the higher power burners.  
 – compared with a model with a wok at the front left there is a safety argument as it offers a good compromise between easy access and child safety.  
 – compared to wok front level, the extra distance to control dials allows a higher power wok burner to be used without making the controls too hot and offering added convenience in terms of power available.  
<sup>5</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.  
<sup>6</sup>For round based pans.

# Domino hobs

## iQ 500 ET475FYB1E

Teppan Yaki domino hob  
Steel/black glass

40cm



2  
Year Warranty

### Flexible cooking to your exact tastes:

Create your own bespoke cooking area with a modular domino hob mix. If one hob isn't enough or if you'd prefer a mix of fuel types, take a look through our selection of domino cooktops. The Siemens range offers specialist models such as a Teppan Yaki or handy, single wok burner, which are perfect as an add-on to your current hob. The sleek black designs with steel dials or touchSlider controls perfectly bring the range together, meaning a combination can be installed to create your ideal cooking station.



### Domino hob specifications

| APPLIANCE TYPE  | TEPPAN YAKI DOMINO HOB                                | FLEXINDUCTION DOMINO HOB |
|---|---|--------------------------|
| <b>Design family</b>  | iQ 500  | iQ 700                   |
| Model number  | Black glass / stainless steel trim<br>Stainless steel | EX375FXB1E               |
|   | ET475FYB1E  | -                        |
| <b>DESIGN</b>   |   |                          |
| Hob width (mm)  | 392   | 302                      |
| Side controls   | -   | -                        |
| Front controls  | ■   | ■                        |
| Control dials   | -   | -                        |
| touchControl  | ■   | ■                        |
| touchSlider operation   | ■   | ■                        |
| All-around trim   | -   | -                        |
| Three-sided bevelled frameless finish                               | -   | -                        |
| Flush-fitting design / installation                                 | -   | -                        |
| Design trim (front facette with side trim)                          | ■   | ■                        |
| Bevelled front  | -   | -                        |
| Can be installed with a Siemens Domino hob                          | ■   | ■                        |
| <b>KEY FEATURES</b>   |   |                          |
| Electronic control  | ■   | ■                        |
| Electronic power level display                                      | ■   | ■                        |
| Automatic safety switch off   | ■   | ■                        |
| Control panel lock  | -   | -                        |
| Super boost function  | -   | -                        |
| powerBoost setting  | -   | ■                        |
| quickStart  | -   | -                        |
| reStart   | -   | -                        |
| Energy consumption display  | -   | -                        |
| Automatic pan recognition   | -   | ■                        |
| Power management function   | -   | ■                        |
| Connection current management                                       | -   | -                        |
| <b>FEATURES</b>   |   |                          |
| Number of power levels  | 9   | 17                       |
| Main on/off switch  | ■   | ■                        |
| Timer for all zones   | ■   | ■                        |
| Two-stage residual heat indicators (H/h)                            | ■   | ■                        |
| Control panel pause   | -   | ■                        |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                          |   |                          |
| Number of cooking zones   | 2   | 2                        |
| Number of flexinduction zones                                       | -   | 1                        |
| Number of dual / extendible zones                                   | -   | -                        |
| Number of triple / extendible zones                                 | -   | -                        |
| Left zones flexinduction connected – power (kW) / dimensions (mm)   | -   | -                        |
| Right zones flexinduction connected – power (kW) / dimensions (mm)  | -   | -                        |
| Centre zones flexinduction connected – power (kW) / dimensions (mm) | -   | 1.0-3.6 / 760            |
| Left front zone – power (kW) / dimensions (mm)                      | -   | -                        |
| Left rear zone – power (kW) / dimensions (mm)                       | -   | -                        |
| Centre front zone – power (kW) / dimensions (mm)                    | 0.95 / 292 x 344                                      | -                        |
| Centre rear zone – power (kW) / dimensions (mm)                     | -   | -                        |
| Right front zone – power (kW) / dimensions (mm)                     | -   | -                        |
| Right rear zone – power (kW) / dimensions (mm)                      | -   | -                        |
| Nominal voltage (V)   | 220-240   | 220-240                  |
| Total connected electrical load (W)                                 | 1,900   | 3,600                    |
| Cable length (cm)   | 110   | 110                      |
| GB plug   | -   | -                        |
| Appliance weight (kg)   | 11.0  | 6.0                      |
| Safety approved   | ■   | ■                        |

■ Yes, model has this feature. – Feature not available for this model.  
All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.



### Domino hob specifications

| APPLIANCE TYPE   | WOK DOMINO GAS HOB                     | DOMINO GAS HOB      |
|--|--|---------------------|
| <b>Design family</b>                                     | iQ 700                                 | iQ 700              |
| Model number   | Stainless steel / stainless steel trim | ER3A6AD70           |
|  | ER3A6AD70                              | ER3A6BD70           |
| <b>DESIGN</b>  |  |                     |
| Width (mm)   | 302                                    | 302                 |
| Control position   | Front                                  | Front               |
| <b>KEY FEATURES</b>                                      |  |                     |
| stepFlame technology                                     | ■                                      | ■                   |
| Digital power level display                              | ■                                      | ■                   |
| Number of dual circuit wok style burners <sup>1</sup>    | 1                                      | -                   |
| High power (5.0kW+) wok burner <sup>2</sup>              | ■                                      | -                   |
| Dual control wok burner <sup>3</sup>                     | ■                                      | -                   |
| 'Diamond' shape burner layout <sup>4</sup>               | -                                      | -                   |
| Dishwasher safe pan supports <sup>5</sup>                | ■                                      | ■                   |
| Hob surface type   | Black ceramic glass                    | Black ceramic glass |
| <b>FEATURES</b>  |  |                     |
| Number of cooking zones                                  | 1                                      | 2                   |
| Individual power levels                                  | 9                                      | 9                   |
| Variable power levels                                    | -                                      | -                   |
| Ignition via control dials                               | ■                                      | ■                   |
| Flame-failure safety device                              | ■                                      | ■                   |
| Cast iron pan supports (number)                          | 1 x dishwasher safe                    | 1 x dishwasher safe |
| Cast iron finish pan supports (number)                   | -                                      | -                   |
| Enamelled steel pan supports (number)                    | -                                      | -                   |
| Low profile single piece burners                         | ■                                      | ■                   |
| Two piece burners  | -                                      | -                   |
| Comfort profile  | ■                                      | ■                   |
| Can be combined with other models with comfort profile   | ■                                      | ■                   |
| Installation flush with work top possible                | -                                      | -                   |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>               |  |                     |
| Nominal voltage (V)                                      | 220-240                                | 220-240             |
| Maximum gas power output load (W)                        | 6,000                                  | 4,700               |
| Total connected electrical load (W)                      | 1.0                                    | 1.0                 |
| Cable length (cm)  | 100                                    | 100                 |
| GB plug  | -                                      | -                   |
| Left burner power (kW)                                   | -                                      | -                   |
| Front left burner power (kW)                             | -                                      | -                   |
| Back left burner power (kW)                              | -                                      | -                   |
| Centre/centre front burner power (kW)                    | 6.00                                   | 1.90                |
| Centre back burner power (kW)                            | -                                      | 2.80                |
| Front right burner power (kW)                            | -                                      | -                   |
| Back right burner power (kW)                             | -                                      | -                   |
| Right burner power (kW)                                  | -                                      | -                   |
| Pre-set for natural gas                                  | ■                                      | ■                   |
| CE Marked  | ■                                      | ■                   |
| <b>STANDARD ACCESSORIES</b>                              |  |                     |
| Wok stand <sup>6</sup>                                   | ■                                      | -                   |
| LPG jets   | 28-30 / 37mbar                         | 28-30 / 37mbar      |
| <b>OPTIONAL ACCESSORIES</b>                              |  |                     |
| Connecting strip to link to other comfort profile models | HEZ394301                              | HEZ394301           |

■ Yes, model has this feature. – Feature not available for this model.  
All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.  
<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring.  
<sup>2</sup>High power output for rapid heating – especially valuable for flash and wok frying.  
<sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently.  
<sup>4</sup>Diamond refers to the visual layout of the burners – i.e. Diamond shape as opposed to normal square layout for 60cm hobs.  
Diamond layout offers:  
– greater convenience / accessibility with 2 large pans at the same time.  
– compared to models with wok on the rear zones, you can work with larger diameter wok pans without touching the rear wall and forcing the pan off centre over the burner.  
– no need to reach over front zones to access the higher power burners.  
– compared with a model with a wok at the front left there is a safety argument as it offers a good compromise between easy access and child safety.  
– compared to wok front level, the extra distance to control dials allows a higher power wok burner to be used without making the controls too hot and offering added convenience in terms of power available.  
<sup>5</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.  
<sup>6</sup>For round based pans.



Models shown: ET475FYB1E Teppan Yaki domino hob and ER3A6AD70 wok domino hob

# Hoods. Outstanding performance, intelligently designed.

The kitchen is the heart of the home. Not only is it a place to cook, it is a place to entertain, relax after a hard day's work, or spend time with friends and family.

Siemens hoods work hard to keep your kitchen space fresh, and full of cleaner air whilst also providing ambient lighting. There is a hood for all kitchen designs, including the inductionAir which combines our advanced flexInduction hob with a high-performance extractor for even clearer views in your kitchen. See the hobs section for details on the inductionAir (pages 61, 72 and 73).


Whether you choose a sleek ceiling hood, state-of-the-art downDraft hood, a classic chimney hood or canopy style hood our solutions will provide innovative design and a stylish finish to your kitchen. Selected Siemens hoods come with a quiet and energy efficient motor so you can cook in a more comfortable surrounding.

Siemens hood warranties:

**2** Year Warranty  
A Two Year Warranty is available on all Siemens hoods listed in this brochure to protect against manufacturing and material faults during this warranty period.

To find out more about your warranty and for registration please refer to page 179.

## Siemens Ventilation Showcase

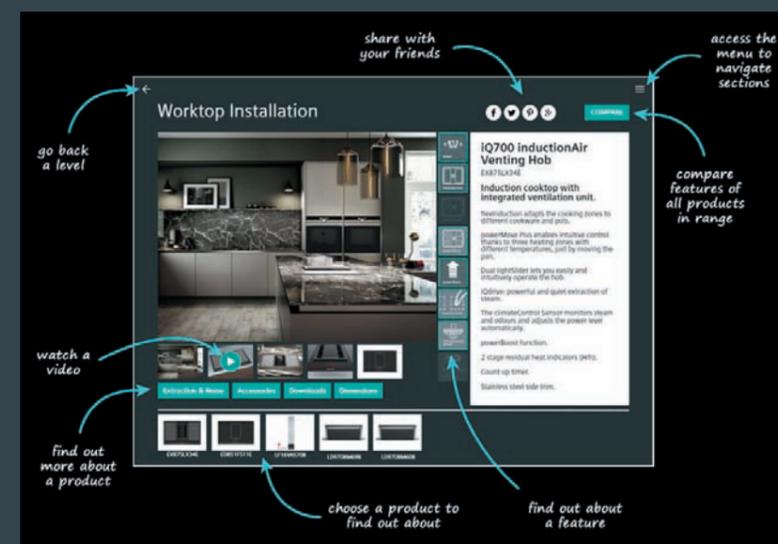

Discover the entire Siemens Ventilation range in more detail, watch videos, learn more about the features and functions and installation methods by visiting our online Siemens Ventilation Showcase: [siemens-home.bsh-group.com/uk/ventilation-brochure](http://siemens-home.bsh-group.com/uk/ventilation-brochure)



Model shown: LC97FVW69B angled hood

# Installation solutions for every kitchen.

## Worktop installation.

downDraft hood.



The perfect solution for keeping your kitchen design clear and with unhindered sightlines, this worktop ventilation system doesn't need any wall or ceiling mounts. When the ventilation system is integrated into your hob, it is able to extract cooking smells right at the source.

## Ceiling installation.

Island and ceiling hoods.



Ideal if your hob is in the centre of your room. Our ceiling hoods can either be bold design statements installed over island units, or blend as unobtrusively into the ceiling itself as standard kitchen lighting.



## Wall installation.

Decorative hoods, glass, box and pyramid chimney hoods.



Our stylish wall-mounted ventilation can be as beautiful and design led as they are effective. Our stunning angled and flat hoods feature emotionLight Pro lighting that allows you to choose from 256 colours using the Home Connect app so you can create ambience in your living space. Our more traditional pyramid, chimney and box chimney hoods provide a classic but contemporary ventilation solution.

## Integrated furniture installation.

Canopy, telescopic and integrated hoods.



If you need to blend the hood into existing wall-mounted kitchen units, choose from a number of options perfect for mounting inside a cupboard space. These concealed hoods are ideal for a sleek modern kitchen.

# Hood installation options.



Model shown: LC97FVW69B flat glass hood

## Ducted or recirculated?

For optimum performance, your extractor hood should be ducted to the outside of the house, so that the extracted air is vented outside. But sometimes this is not practical, so most Siemens hoods can also operate in recirculating mode; where the air is passed through the metal filter to remove grease, and then through a carbon filter to remove odours before being directed back into the kitchen.


Although the extraction rate is slightly lower when using this method than ducted extraction and the carbon odour filter will need to be replaced, recirculating the air offers an energy efficient benefit; cool air is retained in the home in the summer and warm air does not vent out during winter months.

### Ducted Ventilation

- Extracts up to 98% of odours with perfect installation
- Extracts steam
- Effectively planned ducting system required

### Recirculated Ventilation

- Removes up to 95% of odours with cleanAir filters
- Easy to install – no ducting required
- Separate recirculation kit required

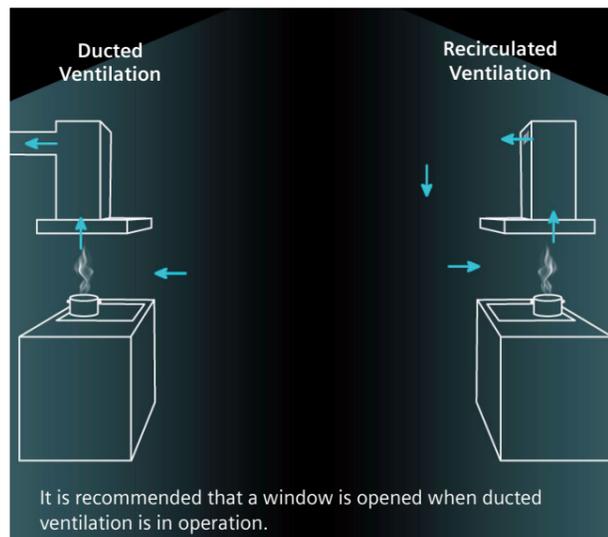

## The power to perform.

A chosen hood must be powerful enough to effectively remove moisture and cooking odours from a kitchen. We recommend the hood should be able to change the air in the kitchen 6-12 times per hour. Using this quick calculation, you can check whether a hood is sufficiently powerful. Firstly, calculate the volume of the kitchen (HxWxD metres). Next multiply that figure by 12. The resulting figure is the ideal extraction rate required in intensive mode. Match this to a lower power level on the hood to avoid having to run at full power for increased efficiency.

### FOR EXAMPLE


Room: 4m x 4m x 2.5m = 40m<sup>3</sup>

12 changes per hour in intensive operation: 12 x 40m<sup>3</sup> = 480m<sup>3</sup>/h

So the hood must achieve >480m<sup>3</sup>/h in intensive mode.



## Recirculation filters.

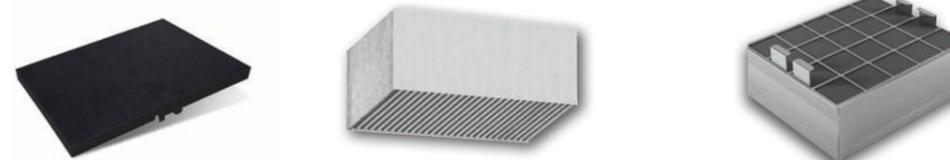

|                 | ACTIVE CARBON FILTER                     | CLEAN AIR FILTER*  | REGENERATIVE CLEAN AIR FILTER*  |
|-----------------|--|--|---|
| Odour reduction | Up to 86%                                | Up to 95%  | Up to 95% or up to 86% if installed without chimney piece   |
| Lifetime        | 6-12 months                              | 12 months  | 10 years  |
| Benefits        | Simple installation, Anti-fish treatment | Increased surface area, High odour reduction, Up to 3dB (A) sound reduction, improved extraction and performance, Anti-fish treatment  | High odour reduction, Up to 3dB (A) sound reduction, Regenerated in the oven every 4 months recommended (2 hours, 200°C), Improved extraction performance |
| Installation    | Behind grease filters, inside the hood   | Extra module required to house the CleanAir filter<br>Option 1: stainless steel module attached to hood chimney<br>Option 2: Integrated plastic module fitted inside the chimney piece | Extra module required (as per CleanAir filter) onto chimney or inside chimney. Chimless installation possible (Angled and flat hoods only)                |

\*CleanAir and Regenerative filters not available for all styles of hood. Additional module may be required to house the filter. Images for example only, different filters may come in a different size and style.

## State-of-the-art efficiency with our iQ700 hoods with iQ drive.



Siemens iQ700 hoods feature innovative technology that saves energy. This is thanks to the highly efficient, durable brushless iQdrive motor which is powerful, but requires very little energy to run. Capable of handling odours and grease in the most challenging cooking situations, and specially designed to last longer. The brushless iQdrive motor at the heart of our selected iQ700 hoods is capable of extracting a measured value of up to 991m<sup>3</sup>/h in our most powerful hood\*.

\*LC91KWW60B



# Completely automatic control with cookConnect and the climateControl sensor.



## Control two appliances with one: cookConnect.

Explore more seamless cooking experiences by using the cookConnect system to connect your hob and hood, so they work together effortlessly.



### cookConnect system


Hobs featuring Siemens cookConnect technology can now talk to cookConnect hoods via WiFi. Either connect the two appliances directly, or through the Home Connect App. Once connected just switch on the hob and the hood will start automatically. Smart sensors in the hood detect steam and odours to adjust and optimise the extraction rate to keep your kitchen fresh and the steam under control. In addition to automatic extraction the lights will also illuminate your cooking space as soon as you turn the hob on. When you're finished, you no longer need to worry about turning the hood off as the the hood will turn itself off automatically once the climateControl sensor detects no further changes in the air quality.



### climateControl sensor

The climateControl sensor automatically adjusts the power level of the hood depending on the level of steam and odours keeping the kitchen fresher without having to manually adjust the power yourself. The climateControl Sensor is activated by selecting the "auto" button.



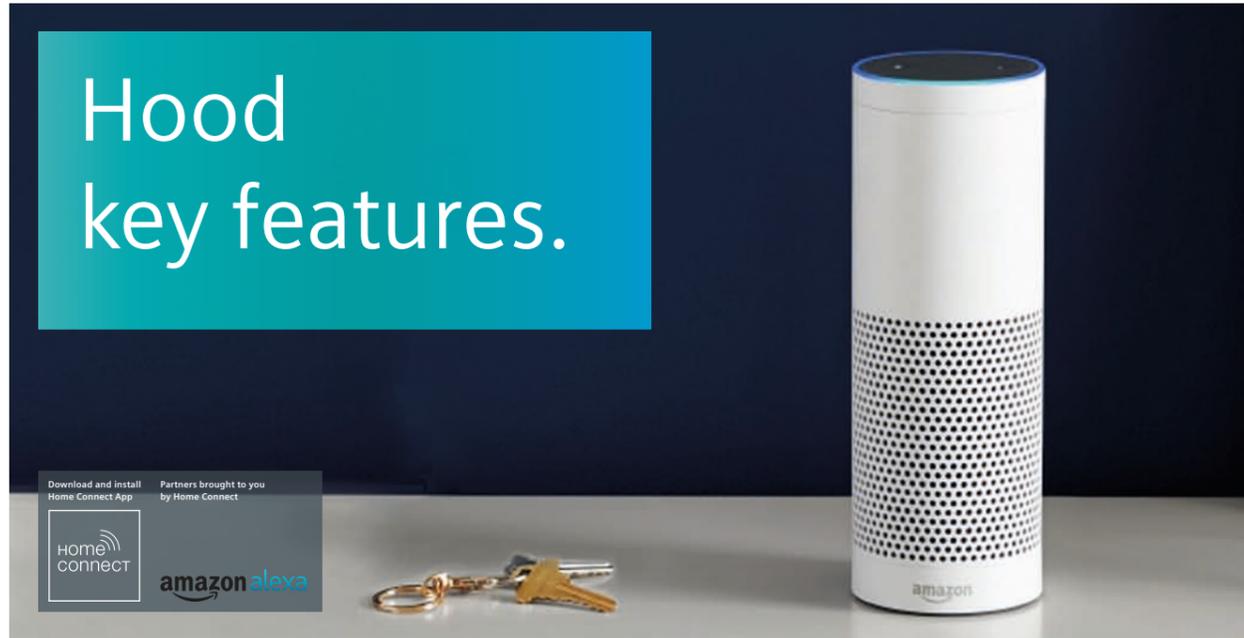

## Hoods with Home Connect make cooking a breeze.

### Home Connect

For Wi-Fi enabled hoods with Home Connect, explore more versatile ways of cooking. Control the lighting, select a power level, or even the fan run-on option, directly using your smartphone or tablet.

Take connected cooking a step further by using our voice control partner, Amazon Alexa, to also control these settings. Multi-task while you cook by using your voice to control the lights or power level with ease.

Through the app you can even activate the automatic mode climateControl sensor, where the hood extractor will adjust its extraction rate depending on the amount of steam and odours so you have less to worry about when cooking.

With the cookConnect system you can even utilise the Home Connect App to connect your hood and hob together. This feature allows you to change your hood settings from the hob, so you have complete control from just one appliance.


## Lighting to match your mood. Your extractor hood, your style, your light.



### emotionLight

Your extractor hood now adapts to your taste. Simply choose between many different background light colours – for an extractor hood that matches your preferences. The colour range is extendable via the Home Connect App, choose from 256 colours.

Using our partner, IFTTT, you can now set up Applets to change the colour of your hood depending on a variety of factors. For example if you purchased a Siemens oven with Home Connect, you could programme the hood colour to change to red when the oven finishes cooking. Simple ways to create new possibilities in your household.

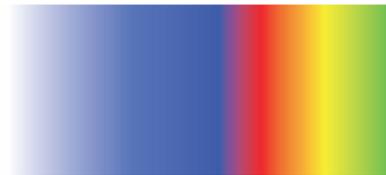

Models shown below: **LC91KWW60B** black glass angled chimney hood showing emotionLight colour examples



## Other lighting options.



### LED Illumination


All Siemens hoods are equipped with state-of-the-art LED lighting, ensuring the hob is illuminated evenly and clearly.



### softLight with Dimmer

Allows you to dim the lights of the hood, perfect for when you're finished cooking and want to create a subtle glow in your kitchen.

## Controlling your hood.

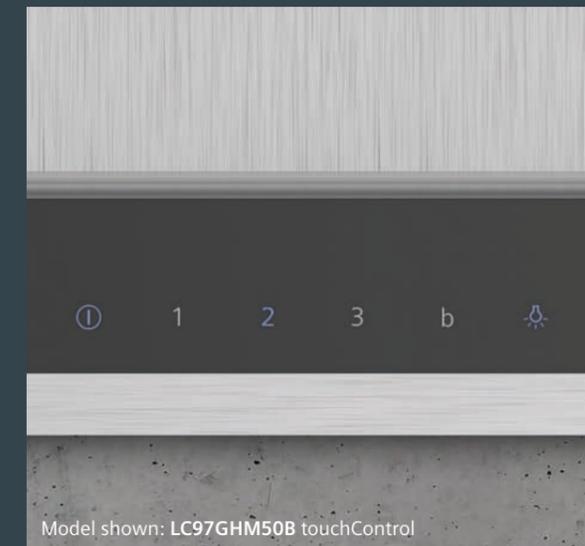

### touchControl

The design of touchControl is integrated into the black glass panel for easy control at the touch of a finger, not to mention sleek design and easy cleaning.



### touchSlider

Control your Siemens hood with ease by simply sliding your finger along the touchSlider to select the power level. Stunning design meets sleek control with touchSlider.



### Remote control

With a hood installed in the ceiling it is important to have complete control. Siemens ceiling hoods come with a remote control to change and manage each setting with ease.



### PushControl

Simply select the setting by pushing the button.

Model shown: LC97GHM50B touchControl

## Other product features



### Width

Indicates the width of the hood. Siemens offer a wide range of hoods to fit different sized niches with our range of hobs. For optimal results, the cooker hood should be at least as wide as the hob. Our hood widths range from 370-1200mm.



### Energy efficient hoods\*

Siemens hoods feature innovations that make them incredibly energy efficient to run, from our durable and quiet brushless iQdrive motor to LED lighting.

\*For individual product energy efficiency ratings please check individual product specifications.

### Intensive setting

The intensive setting creates a powerful boost of extraction, perfect for tackling demanding food such as stir fry or steamed vegetables. This ensures moisture is properly eradicated, without misting windows and keeping the kitchen air fresher.

### Boost Position

For our Angled and Flat hoods, the Boost Position is enabled by slightly pulling the front panel out to capture more steam and draw more air through the hood, which is particularly effective when frying meat or fish.

### Interval Operation

With interval ventilation, the hood switches on automatically at the lowest level for 10 minutes every hour, to keep the air in the kitchen refreshed. The interval ventilation switches off after 24 hours.

### Automatic after running time

This convenient feature reduces cooking odours by allowing the extractor to carry on running automatically after cooking has finished at a low speed for 3 - 30 minutes - the duration the extractor carries on for depends on the model.

### Filter indication indicator system

The filter saturation indicators let you know when your hood's grease filters need to be cleaned with an illuminated symbol on the hood. For hoods installed with a recirculation filter, the saturation indicator will also notify you when the recirculation filter should be replaced or regenerated (depending on type of filter installed).

# Elite design and exciting innovations to impress in your kitchen: studioLine hoods.

The premium Siemens studioLine hood collection consists of one varioLift hood, three ceiling hoods, two decorative wall hoods and one downdraft hood.

Our studioLight highlight, the varioLift hood, has an impressive mechanism that means it can be lowered by up to 5 positions for maximum effect when cooking or raised to seamlessly integrate into your kitchen. Operate this appliance using voice control, or by using a remote control.

Equally the white stainless steel and white gloss ceiling hoods are elegant and sophisticated in their appearance and offer top of the range features including cookConnect; the ability to pair the hood appliance with a matching hob so the hood reacts to the hobs cooking speeds and other functions.

If you're looking for appliances to perfectly match other blackSteel studioLine appliances then our studioLine wall hoods, with their subtle operating panel, will ensure a striking design statement in your kitchen space. The disguised high-quality black metal grease filters perfectly combine form and function whilst the emotionLight Pro, exclusive to these models, offers 256 adjustable ambient background colours through the Home Connect app so you can set the ideal mood in your living space.

With options including Home Connect, LED lights and quieter iQ drive motors, explore the beautiful and impressive studioLine hoods collection with their incredible technology that helps cooking and entertaining become enjoyable and more care-free.

studioLine

Whether you are elevated or relaxed, our new varioLift works around you.

studioLine

The studioLine hood appliances are more than just highly functional equipment – they form part of an ambitious lifestyle and an expression of individuality. Siemens appliances are created for those who want to turn every day into something extraordinary.



**cookConnect system**

Available on selected Siemens studioLine hoods, connect this hood to a hob with the cookConnect feature and enjoy managing your hob while the hood sensors follow your cooking method and settings automatically.



**climateControl sensor**

Experience seamless cooking with climateControl. This worry free function senses the volume of steam during the cooking process, adjusting the appliance automatically to ensure odours and steam are removed as quickly as possible through the hood.



**iQdrive**

Selected studioLine hoods feature innovative technology that saves energy. This is thanks to the highly efficient, durable brushless iQdrive motor which is powerful, but requires very little energy to run.



**lightTemperature**

Unique to studioLine, the adjustable LED lights offer the ability to set the lighting at a desired white colour temperature. Use the Home Connect App to adjust the hue emitted from the LED lights from cool to warm white (2,700 K - 5,000 K) via the sliding adjustment scale. This feature enables you to adjust the type of white light to align with other kitchen lighting or to set the right ambience in the room.



LR99CQS25B ceiling hood



LD97DBM69B downDraft hood



LC91KWW69B Angled extractor hood



The new varioLift hood, coming September 2019. Bringing versatility and drama to the kitchen.




It's functional but show-stopping ability to move up and down from the ceiling seamlessly using either a remote control, through the hob or through the Home Connect App offers you more space as and when you need it. You can really tailor your kitchen space with this appliance, with a height that can be adjusted to 5 different height settings through the Home Connect App - for extra flexibility. Remote control gives you even more versatility as you can hide the appliance away when you are entertaining, creating a more spacious feel in your kitchen. Adversely you can bring the hood closer down depending on what you are cooking for easier access to the filters for cleaning. Moving the hood closer to the cooking improves performance as you can bring cooking steam closer to the extractor fan. With the integrated iQdrive you will receive quieter noise levels and you can even manage this appliance by using voice control, through Home Connect partner Amazon Alexa.

**Unique filter**

The studioLine varioLift hood is designed primarily for recirculation. The hood therefore comes with premium recirculation filters to keep the air in your kitchen fresh.

New CleanAir Plus filters feature the benefits of CleanAir filters with added anti-pollen properties. This special biofunctional layer binds and deactivates allergens.

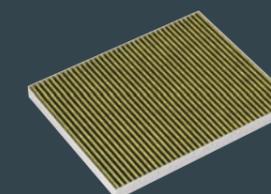

LR18HLT25 varioLift extractor hood

# Ceiling hoods

**iQ 700 LR18HLT25**

Available from September 2019



Ceiling hood  
Stainless steel and white glass

90cm



### The studioLine varioLift ceiling hood: performance meets design

Lowered for maximum effect when cooking or raised to seamlessly integrate into your kitchen. All the time at your service via voice control.

Thanks to its varioLift function, the hood can be lowered to the desired height close to the source of steam and odours, and then moved out of sight when not in use.



### Ceiling hood specifications

| APPLIANCE TYPE   | CEILING HOOD                  |
|--|-------------------------------|
| <b>Design family</b>   | <b>iQ 500</b>                 |
| Model number   | LR18HLT25                     |
| Colour   | Stainless steel & white glass |
| <b>KEY FEATURES</b>  |                               |
| emotionLight Pro   | –                             |
| Home Connect   | ■                             |
| cookConnect hob based hood control                                       | ■                             |
| climateControl sensor  | ■                             |
| Adjustable LED white colour temperature                                  | ■                             |
| iQdrive  | ■                             |
| Intensive setting / Automatic intensive revert <sup>1</sup>              | ■ / ■                         |
| Grease / charcoal filter saturation indicators                           | ■ / ■                         |
| <b>FEATURES</b>  |                               |
| Suitable for ducted / recirculating operation                            | ■ / ■                         |
| Type of control  | Remote Control                |
| Power levels   | 3 + 2 intensive               |
| Electronic power level display   | –                             |
| Interval operation   | ■                             |
| Automatic after running (minutes)  | 10                            |
| Lighting   | 6 x LED lights                |
| softLight with dimmer function   | ■                             |
| Number of metal grease filter cassettes                                  | 3                             |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                               |                               |
| Appliance width (mm)   | 1050                          |
| <b>Extraction Rate in m<sup>3</sup>/h <sup>3,4</sup></b>                 |                               |
| – ducted / recirculating at power level 1                                | – / 204                       |
| – ducted / recirculating at power level 2                                | – / 315                       |
| – ducted / recirculating at power level 3                                | – / 417                       |
| – ducted / recirculating at power level 4 or intensive setting 1         | – / 573                       |
| – ducted / recirculating, intensive setting or intensive setting 2       | – / 706                       |
| <b>Noise level (sound power) based on dB(A) re 1 pW <sup>3,5</sup></b>   |                               |
| – ducted / recirculating at power level 1                                | – / 43                        |
| – ducted / recirculating at power level 2                                | – / 55                        |
| – ducted / recirculating at power level 3                                | – / 63                        |
| – ducted / recirculating at power level 4 or intensive setting 1         | – / 71                        |
| – ducted / recirculating, intensive setting or intensive setting 2       | – / 75                        |
| Pipe outlet diameter (mm)  | N/A                           |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)           | 700 / 700                     |
| GB plug  | –                             |
| Energy rating  | N/A                           |
| <b>OPTIONAL ACCESSORIES <sup>2</sup></b>                                 |                               |
| Recirculating kit  | CleanAir Filters Included     |
| CleanAir Recirculating Module with Filter (Stainless Steel)              | –                             |
| CleanAir Recirculating Module with Filter (White)                        | –                             |
| Regenerative CleanAir Recirculating Module with Filter (Stainless Steel) | –                             |
| Regenerative CleanAir Recirculating Module with Filter (White)           | –                             |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive.

<sup>2</sup>A type of recirculating kit is required if recirculating.

<sup>3</sup>Air flow and noise declarations made in line with CECEC Code of Conduct.

<sup>4</sup>Measured according to EN61591 on largest pipe diameter.

<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.



### Ceiling hood specifications

| APPLIANCE TYPE   | CEILING HOODS       |                     |                     |                 |
|--|---------------------|---------------------|---------------------|-----------------|
| <b>Design family</b>   | <b>iQ 700</b>       | <b>iQ 700</b>       | <b>iQ 700</b>       | <b>iQ 500</b>   |
| Model number   | LR29CQ525B          | LR99CQ525B          | LR97CQ525B          | LR97CAQ50B      |
| Colour   | White & white glass | White & white glass | White & white glass | Stainless steel |
| <b>KEY FEATURES</b>  |                     |                     |                     |                 |
| emotionLight Pro   | –                   | –                   | –                   | –               |
| Home Connect   | ■                   | ■                   | ■                   | ■               |
| cookConnect hob based hood control                                       | ■                   | ■                   | ■                   | ■               |
| climateControl sensor  | ■                   | ■                   | ■                   | –               |
| Adjustable LED white colour temperature                                  | ■                   | ■                   | ■                   | –               |
| iQdrive  | ■                   | ■                   | ■                   | ■               |
| Intensive setting / Automatic intensive revert <sup>1</sup>              | ■ / ■               | ■ / ■               | ■ / ■               | ■ / ■           |
| Grease / charcoal filter saturation indicators                           | ■ / ■               | ■ / ■               | ■ / ■               | ■ / ■           |
| <b>FEATURES</b>  |                     |                     |                     |                 |
| Suitable for ducted / recirculating operation                            | ■ / ■               | ■ / ■               | ■ / ■               | ■ / ■           |
| Type of control  | Remote Control      | Remote Control      | Remote Control      | Remote Control  |
| Power levels   | 3 + 2 intensive     | 3 + 2 intensive     | 3 + 2 intensive     | 3 + 2 intensive |
| Electronic power level display   | –                   | –                   | –                   | –               |
| Interval operation   | ■                   | ■                   | ■                   | ■               |
| Automatic after running (minutes)  | 10                  | 10                  | 10                  | 10              |
| Lighting   | LED panel           | LED panel           | 4 x LED lights      | 4 x LED lights  |
| softLight with dimmer function   | ■                   | ■                   | ■                   | ■               |
| Number of metal grease filter cassettes                                  | 2                   | 2                   | 2                   | 2               |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                               |                     |                     |                     |                 |
| Appliance width (mm)   | 1200                | 900                 | 900                 | 900             |
| <b>Extraction Rate in m<sup>3</sup>/h <sup>3,4</sup></b>                 |                     |                     |                     |                 |
| – ducted / recirculating at power level 1                                | 265 / 197           | 265 / 197           | 265 / 200           | 265 / 200       |
| – ducted / recirculating at power level 2                                | 331 / 313           | 331 / 313           | 335 / 316           | 335 / 316       |
| – ducted / recirculating at power level 3                                | 458 / 419           | 458 / 419           | 458 / 422           | 458 / 422       |
| – ducted / recirculating at power level 4 or intensive setting 1         | 672 / 537           | 672 / 537           | 594 / 513           | 594 / 513       |
| – ducted / recirculating, intensive setting or intensive setting 2       | 933 / 637           | 933 / 637           | 798 / 565           | 798 / 565       |
| <b>Noise level (sound power) based on dB(A) re 1 pW <sup>3,5</sup></b>   |                     |                     |                     |                 |
| – ducted / recirculating at power level 1                                | 41 / 47             | 41 / 47             | 41 / 46             | 41 / 46         |
| – ducted / recirculating at power level 2                                | 47 / 56             | 47 / 56             | 47 / 57             | 47 / 57         |
| – ducted / recirculating at power level 3                                | 56 / 63             | 56 / 63             | 56 / 63             | 56 / 63         |
| – ducted / recirculating at power level 4 or intensive setting 1         | 64 / 68             | 64 / 68             | 62 / 67             | 62 / 67         |
| – ducted / recirculating, intensive setting or intensive setting 2       | 70 / 72             | 70 / 72             | 68 / 69             | 68 / 69         |
| Pipe outlet diameter (mm)  | 150                 | 150                 | 150                 | 150             |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)           | 650 / 650           | 650 / 650           | 650 / 650           | 650 / 650       |
| GB plug  | ■                   | ■                   | ■                   | ■               |
| Energy rating  | A                   | A                   | A                   | A               |
| <b>OPTIONAL ACCESSORIES <sup>2</sup></b>                                 |                     |                     |                     |                 |
| Recirculating kit  | –                   | –                   | –                   | –               |
| CleanAir Recirculating Module with Filter (Stainless Steel)              | LZ20JCC50           | LZ20JCC50           | LZ20JCC50           | LZ20JCC50       |
| CleanAir Recirculating Module with Filter (White)                        | LZ20JCC20           | LZ20JCC20           | LZ20JCC20           | LZ20JCC20       |
| Regenerative CleanAir Recirculating Module with Filter (Stainless Steel) | LZ20JCD50           | LZ20JCD50           | LZ20JCD50           | LZ20JCD50       |
| Regenerative CleanAir Recirculating Module with Filter (White)           | LZ20JCD20           | LZ20JCD20           | LZ20JCD20           | LZ20JCD20       |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive.

<sup>2</sup>A type of recirculating kit is required if recirculating.

<sup>3</sup>Air flow and noise declarations made in line with CECEC Code of Conduct.

<sup>4</sup>Measured according to EN61591 on largest pipe diameter.

<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.



Model shown: LD97DBM69B downDraft hood

## The finishing touch for your kitchen. Now with flexible installation.


Extract cooking smells at source with the iQ700 downDraft hood, ideal for keeping the sightlines of open plan kitchens. Conveniently placed within the worktop, this elegant hood can be automatically raised when needed, then disappears at the touch of a button. There is no need to worry about losing all your storage space beneath as you can place the motor somewhere more convenient with the remote installation kit.



Model shown: LD97DBM60B downDraft hood

## Improved performance. Premium design.

The Siemens Remote Motor Installation Mounting Kit (LZ29IDM00) frees up space under the worktop and provides the option to mount the motor up to 3 metres away from the appliance. Image for illustrative purposes only. Ducting not supplied.

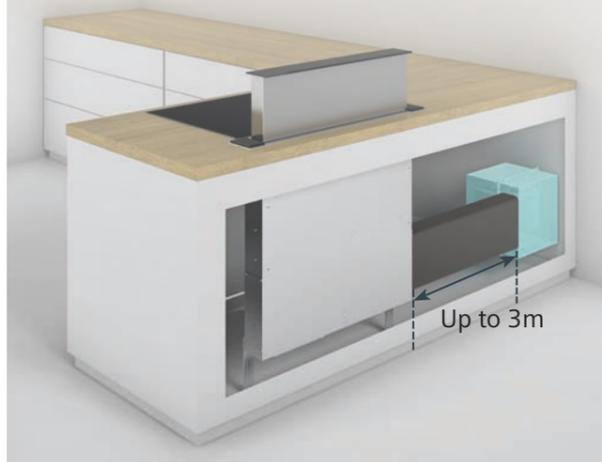

# downDraft hoods

**iQ700** LD97DBM69B

studioLine

downDraft hood  
Stainless steel and black glass



**2**  
Year Warranty

studioLine  
downDraft hood specifications

| APPLIANCE TYPE  | DOWNDRAFT HOODS               |                               |
|---|-------------------------------|-------------------------------|
|   | iQ700                         | iQ700                         |
| Design family   | LD97DBM69B                    | LD97DBM60B                    |
| Model number  | LD97DBM69B                    | LD97DBM60B                    |
| Colour  | Stainless steel & black glass | Stainless steel & black glass |
| <b>KEY FEATURES</b>   |                               |                               |
| emotionLight Pro  | –                             | –                             |
| Home Connect  | –                             | –                             |
| cookConnect hob based hood control                                    | –                             | –                             |
| climateControl sensor   | –                             | –                             |
| Adjustable LED white colour temperature                               | –                             | –                             |
| iQdrive   | –                             | –                             |
| Intensive setting / Automatic intensive revert <sup>1</sup>           | ■ / ■                         | ■ / ■                         |
| Grease / charcoal filter saturation indicators                        | ■ / ■                         | ■ / ■                         |
| <b>FEATURES</b>   |                               |                               |
| Suitable for ducted / recirculating operation                         | ■ / ■                         | ■ / ■                         |
| Type of control   | Touch Control                 | Touch Control                 |
| Power levels  | 3 + 2 intensive               | 3 + 2 intensive               |
| Electronic power level display  | –                             | –                             |
| Interval operation  | –                             | –                             |
| Automatic after running (minutes)                                     | 10                            | 10                            |
| Lighting  | LED 7W strip                  | LED 7W strip                  |
| softLight with dimmer function  | –                             | –                             |
| Number of metal grease filter cassettes                               | 2                             | 2                             |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                            |                               |                               |
| Appliance width (mm)  | 912                           | 912                           |
| <b>Extraction Rate in m<sup>3</sup>/h<sup>3,4</sup></b>               |                               |                               |
| - ducted / recirculating at power level 1                             | 260 / 230                     | 260 / 230                     |
| - ducted / recirculating at power level 2                             | 428 / 410                     | 428 / 410                     |
| - ducted / recirculating at power level 3                             | 530 / 452                     | 530 / 452                     |
| - ducted / recirculating at power level 4 or intensive setting 1      | 630 / 482                     | 630 / 482                     |
| - ducted / recirculating, intensive setting or intensive setting 2    | 750 / 500                     | 750 / 500                     |
| <b>Noise level (sound power) based on dB(A) re 1 pW<sup>3,5</sup></b> |                               |                               |
| - ducted / recirculating at power level 1                             | 43 / 37                       | 43 / 37                       |
| - ducted / recirculating at power level 2                             | 58 / 70                       | 58 / 70                       |
| - ducted / recirculating at power level 3                             | 62 / 72                       | 62 / 72                       |
| - ducted / recirculating at power level 4 or intensive setting 1      | 66 / 74                       | 66 / 74                       |
| - ducted / recirculating, intensive setting or intensive setting 2    | 67 / 75                       | 67 / 75                       |
| Pipe outlet diameter (mm)   | 150                           | 150                           |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)        | –                             | –                             |
| GB plug   | ■                             | ■                             |
| Energy rating   | A                             | A                             |
| <b>OPTIONAL ACCESSORIES<sup>7</sup></b>                               |                               |                               |
| Recirculating kit   | LZ29IDP00                     | LZ29IDP00                     |
| downDraft remote motor mounting kit                                   | LZ29IDM00                     | LZ29IDM00                     |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive.

<sup>2</sup>A type of recirculating kit is required if recirculating.

<sup>3</sup>Air Flow and noise declarations made in line with CECEC Code of Conduct.

<sup>4</sup>Measured according to EN61591 on largest pipe diameter.

<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.




Model shown: LF31IVV60  
island cube hood

# Island hoods

## iQ 700 LF31IVV60

Island cube hood  
Black glass

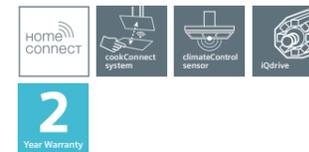

### Island hood specifications

| APPLIANCE TYPE  | ISLAND CUBE              | ISLAND          |                           |
|---|--------------------------|-----------------|---------------------------|
| Design family   | iQ 700                   | iQ 700          | iQ 300                    |
| Model number  | LF31IVV60                | LF918UV50B      | LF97GBM50B                |
| Colour  | Black glass              | Stainless steel | Stainless steel and glass |
| <b>KEY FEATURES</b>   |                          |                 |                           |
| emotionLight Pro  | -                        | -               | -                         |
| Home Connect  | ■                        | ■               | -                         |
| cookConnect hob based hood control                                    | ■                        | ■               | -                         |
| climateControl sensor   | ■                        | ■               | -                         |
| Adjustable LED white colour temperature                               | -                        | -               | -                         |
| iQdrive   | ■                        | -               | -                         |
| Intensive setting / Automatic intensive revert <sup>1</sup>           | ■ / ■                    | ■ / ■           | ■ / ■                     |
| Grease / charcoal filter saturation indicators                        | ■ / ■                    | ■ / ■           | - / -                     |
| <b>FEATURES</b>   |                          |                 |                           |
| Suitable for ducted / recirculating operation                         | - / ■                    | ■ / ■           | ■ / ■                     |
| Type of control   | Touch Control            | Touch Control   | Touch Control             |
| Power levels  | 3 + 2 intensive          | 3 + 2 intensive | 3 + 1 intensive           |
| Electronic power level display  | ■                        | ■               | -                         |
| Interval operation  | -                        | -               | -                         |
| Automatic after running (minutes)                                     | 10                       | 10              | -                         |
| Lighting  | 4 x LED lights           | 4 x LED lights  | 4 x LED lights            |
| softLight with dimmer function  | ■                        | ■               | ■                         |
| Number of metal grease filter cassettes                               | 1                        | 3               | 2                         |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                            |                          |                 |                           |
| Appliance width (mm)  | 370                      | 898             | 898                       |
| <b>Extraction Rate in m<sup>3</sup>/h<sup>3,4</sup></b>               |                          |                 |                           |
| - ducted / recirculating at power level 1                             | - / 180                  | 283 / 171       | 243 / 173                 |
| - ducted / recirculating at power level 2                             | - / 310                  | 443 / 315       | 328 / 253                 |
| - ducted / recirculating at power level 3                             | - / 390                  | 597 / 359       | 429 / 315                 |
| - ducted / recirculating at power level 4 or intensive setting 1      | - / 450                  | 815 / 392       | - / -                     |
| - ducted / recirculating, intensive setting or intensive setting 2    | - / 510                  | 980 / 427       | 732 / 384                 |
| <b>Noise level (sound power) based on dB(A) re 1 pW<sup>4,5</sup></b> |                          |                 |                           |
| - ducted / recirculating at power level 1                             | - / 52                   | 43 / 59         | 47 / 62                   |
| - ducted / recirculating at power level 2                             | - / 64                   | 55 / 69         | 54 / 69                   |
| - ducted / recirculating at power level 3                             | - / 69                   | 62 / 72         | 60 / 73                   |
| - ducted / recirculating at power level 4 or intensive setting 1      | - / 72                   | 69 / 74         | - / -                     |
| - ducted / recirculating, intensive setting or intensive setting 2    | - / 74                   | 73 / 76         | 71 / 77                   |
| Pipe outlet diameter (mm)   | N/A                      | 150 / 120       | 150 / 120                 |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)        | 550 / 650                | 550 / 650       | 550 / 650                 |
| GB plug   | -                        | ■               | ■                         |
| Energy rating   | N/A                      | A+              | B                         |
| <b>OPTIONAL ACCESSORIES<sup>7</sup></b>                               |                          |                 |                           |
| Recirculating kit   | CleanAir Filter Included | LZ53850         | LZ53650                   |
| CleanAir Recirculating filter kit (stainless steel module)            | -                        | LZ57600         | LZ57500                   |
| Replacement Regenerative CleanAir filter                              | -                        | LZ00XXP00       | LZ00XXP00                 |

■ Yes, model has this feature. - Feature not available for this model.  
<sup>1</sup>Power automatically reverts back to normal setting after intensive.  
<sup>2</sup>A type of recirculating kit is required if recirculating.  
<sup>3</sup>Air Flow and noise declarations made in line with CECEC Code of Conduct.  
<sup>4</sup>Measured according to EN61591 on largest pipe diameter.  
<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.  
<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

# Decorative hoods

**iQ 700 LC91KWW69B**

Angled chimney hood  
Black glass

90cm



2  
Year Warranty



## Angled hood specifications

| APPLIANCE TYPE   | ANGLED HOOD     |
|--|-----------------|
| <b>Design family</b>   | iQ 700          |
| Model number   | LC91KWW69B      |
| Colour   | Black Glass     |
| <b>KEY FEATURES</b>  |                 |
| emotionLight Pro   | ■               |
| Home Connect   | ■               |
| cookConnect hob based hood control                                 | ■               |
| climateControl sensor  | ■               |
| Adjustable LED white colour temperature                            | -               |
| iQdrive  | ■               |
| Intensive setting / Automatic intensive revert <sup>1</sup>        | ■ / ■           |
| Grease / charcoal filter saturation indicators                     | ■ / ■           |
| <b>FEATURES</b>  |                 |
| Suitable for ducted / recirculating operation                      | ■ / ■           |
| Type of control  | Touch Control   |
| Power levels   | 3 + 2 intensive |
| Electronic power level display                                     | -               |
| Interval operation   | ■               |
| Automatic after running (minutes)                                  | 10              |
| Lighting   | 2 x LED lights  |
| softLight with dimmer function                                     | ■               |
| Number of metal grease filter cassettes                            | 2               |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                         |                 |
| Appliance width (mm)   | 890             |
| Extraction Rate in m <sup>3</sup> /h <sup>3,4</sup>                |                 |
| - ducted / recirculating at power level 1                          | 298 / 199       |
| - ducted / recirculating at power level 2                          | 383 / 321       |
| - ducted / recirculating at power level 3                          | 527 / 435       |
| - ducted / recirculating at power level 4 or intensive setting 1   | 710 / 531       |
| - ducted / recirculating, intensive setting or intensive setting 2 | 988 / 587       |
| Noise level (sound power) based on dB(A) re 1 pW <sup>1,5</sup>    |                 |
| - ducted / recirculating at power level 1                          | 42 / 50         |
| - ducted / recirculating at power level 2                          | 48 / 60         |
| - ducted / recirculating at power level 3                          | 56 / 67         |
| - ducted / recirculating at power level 4 or intensive setting 1   | 62 / 73         |
| - ducted / recirculating, intensive setting or intensive setting 2 | 69 / 76         |
| Pipe outlet diameter (mm)  | 150 / 120       |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)     | 450 / 600       |
| GB plug  | ■               |
| Energy rating  | A+              |
| <b>OPTIONAL ACCESSORIES <sup>2</sup></b>                           |                 |
| Recirculating kit  | LZ10AKU00       |
| Recirculating kit (without chimney)                                | LZ10AKT00       |
| Regenerative CleanAir recirculating kit                            | LZ10AKS00       |
| Regenerative CleanAir recirculating kit (without chimney)          | LZ10AKR00       |

■ Yes, model has this feature. - Feature not available for this model.  
<sup>1</sup>Power automatically reverts back to normal setting after intensive.  
<sup>2</sup>A type of recirculating kit is required if recirculating.  
<sup>3</sup>Air Flow and noise declarations made in line with CECEC Code of Conduct.  
<sup>4</sup>Measured according to EN61591 on largest pipe diameter.  
<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.  
<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

## Angled and flat hood specifications

| APPLIANCE TYPE   | FLAT HOOD       | ANGLED HOODS    |                 |                 |                 |
|--|-----------------|-----------------|-----------------|-----------------|-----------------|
| <b>Design family</b>   | iQ 700          | iQ 700          | iQ 300          | iQ 300          | iQ 300          |
| Model number   | LC91KWW69B      | LC91KWW60B      | LC87KBM60B      | LC87KHM60B      | LC67KHM60B      |
| Colour   | Black glass     |
| <b>KEY FEATURES</b>  |                 |                 |                 |                 |                 |
| emotionLight Pro   | ■               | ■               | -               | -               | -               |
| Home Connect   | ■               | ■               | -               | -               | -               |
| cookConnect hob based hood control                                 | ■               | ■               | -               | -               | -               |
| climateControl sensor  | ■               | ■               | -               | -               | -               |
| Adjustable LED white colour temperature                            | -               | -               | -               | -               | -               |
| iQdrive  | ■               | ■               | -               | -               | -               |
| Intensive setting / Automatic intensive revert <sup>1</sup>        | ■ / ■           | ■ / ■           | ■ / ■           | ■ / ■           | ■ / ■           |
| Grease / charcoal filter saturation indicators                     | ■ / ■           | ■ / ■           | - / -           | - / -           | - / -           |
| <b>FEATURES</b>  |                 |                 |                 |                 |                 |
| Suitable for ducted / recirculating operation                      | ■ / ■           | ■ / ■           | ■ / ■           | ■ / ■           | ■ / ■           |
| Type of control  | Touch Control   | Touch Control   | Touch Control   | Touch Control   | Touch Control   |
| Power levels   | 3 + 2 intensive | 3 + 2 intensive | 3 + 1 intensive | 3 + 1 intensive | 3 + 1 intensive |
| Electronic power level display                                     | ■               | ■               | -               | -               | -               |
| Interval operation   | -               | -               | -               | -               | -               |
| Automatic after running (minutes)                                  | 10              | 10              | -               | -               | -               |
| Lighting   | 2 x LED lights  |
| softLight with dimmer function                                     | ■               | ■               | -               | -               | -               |
| Number of metal grease filter cassettes                            | 2               | 2               | 2               | 2               | 2               |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                         |                 |                 |                 |                 |                 |
| Appliance width (mm)   | 890             | 890             | 790             | 790             | 590             |
| Extraction Rate in m <sup>3</sup> /h <sup>3,4</sup>                |                 |                 |                 |                 |                 |
| - ducted / recirculating at power level 1                          | 227 / 130       | 293 / 199       | 252 / 209       | 253 / 218       | 253 / 218       |
| - ducted / recirculating at power level 2                          | 320 / 218       | 393 / 347       | 321 / 286       | 332 / 293       | 332 / 293       |
| - ducted / recirculating at power level 3                          | 394 / 294       | 525 / 447       | 408 / 386       | 416 / 388       | 416 / 388       |
| - ducted / recirculating at power level 4 or intensive setting 1   | 532 / 409       | 712 / 539       | - / -           | - / -           | - / -           |
| - ducted / recirculating, intensive setting or intensive setting 2 | 717 / 527       | 991 / 624       | 676 / 565       | 700 / 557       | 700 / 557       |
| Noise level (sound power) based on dB(A) re 1 pW <sup>1,5</sup>    |                 |                 |                 |                 |                 |
| - ducted / recirculating at power level 1                          | 43 / 43         | 45 / 51         | 48 / 54         | 48 / 55         | 48 / 55         |
| - ducted / recirculating at power level 2                          | 52 / 54         | 50 / 63         | 54 / 61         | 53 / 60         | 53 / 60         |
| - ducted / recirculating at power level 3                          | 57 / 60         | 58 / 69         | 57 / 67         | 58 / 66         | 58 / 66         |
| - ducted / recirculating at power level 4 or intensive setting 1   | 64 / 67         | 65 / 74         | - / -           | - / -           | - / -           |
| - ducted / recirculating, intensive setting or intensive setting 2 | 70 / 73         | 71 / 78         | 67 / 75         | 67 / 75         | 67 / 75         |
| Pipe outlet diameter (mm)  | 150 / 120       | 150 / 120       | 150 / 120       | 150 / 120       | 150 / 120       |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)     | 450 / 600       | 450 / 600       | 450 / 600       | 450 / 600       | 450 / 600       |
| GB plug  | ■               | ■               | ■               | ■               | ■               |
| Energy rating  | B               | A+              | B               | B               | B               |
| <b>OPTIONAL ACCESSORIES <sup>2</sup></b>                           |                 |                 |                 |                 |                 |
| Recirculating kit  | LZ10AFU00       | LZ10AKU00       | LZ10AKU00       | LZ10AKU00       | LZ10AKU00       |
| Recirculating kit (without chimney)                                | LZ10AFT00       | LZ10AKT00       | LZ10AKT00       | LZ10AKT00       | LZ10AKT00       |
| Regenerative CleanAir recirculating kit                            | LZ10AFS00       | LZ10AKS00       | LZ10AKS00       | LZ10AKS00       | LZ10AKS00       |
| Regenerative CleanAir recirculating kit (without chimney)          | LZ10AFR00       | LZ10AKR00       | LZ10AKR00       | LZ10AKR00       | LZ10AKR00       |

■ Yes, model has this feature. - Feature not available for this model.  
<sup>1</sup>Power automatically reverts back to normal setting after intensive.  
<sup>2</sup>A type of recirculating kit is required if recirculating.  
<sup>3</sup>Air Flow and noise declarations made in line with CECEC Code of Conduct.  
<sup>4</sup>Measured according to EN61591 on largest pipe diameter.  
<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.  
<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

# Glass chimney hoods

## iQ300 LC97GHM50B

Straight glass chimney hood  
Stainless steel

90cm



2  
Year Warranty



### Glass hood specifications

| APPLIANCE TYPE  | STRAIGHT GLASS HOOD     |
|---|-------------------------|
| <b>Design family</b>  | iQ300                   |
| Model number  | LC97GHM50B              |
| Colour  | Stainless steel & glass |
| <b>KEY FEATURES</b>   |                         |
| emotionLight Pro  | -                       |
| Home Connect  | -                       |
| cookConnect hob based hood control                                    | -                       |
| climateControl sensor   | -                       |
| Adjustable LED white colour temperature                               | -                       |
| iQdrive   | -                       |
| Intensive setting / Automatic intensive revert <sup>1</sup>           | ■ / ■                   |
| Grease / charcoal filter saturation indicators                        | - / -                   |
| <b>FEATURES</b>   |                         |
| Suitable for ducted / recirculating operation                         | ■ / ■                   |
| Type of control   | Touch Control           |
| Power levels  | 3 + 1 intensive         |
| Electronic power level display  | -                       |
| Interval operation  | -                       |
| Automatic after running (minutes)                                     | -                       |
| Lighting  | 2 x LED lights          |
| softLight with dimmer function  | -                       |
| Number of metal grease filter cassettes                               | 2                       |
| <b>PERFORMANCE/TECHNICAL INFORMATION</b>                              |                         |
| Appliance width (mm)  | 900                     |
| <b>Extraction Rate in m<sup>3</sup>/h<sup>3,4</sup></b>               |                         |
| - ducted / recirculating at power level 1                             | 269 / 183               |
| - ducted / recirculating at power level 2                             | 342 / 262               |
| - ducted / recirculating at power level 3                             | 458 / 321               |
| - ducted / recirculating at power level 4 or intensive setting 1      | - / -                   |
| - ducted / recirculating, intensive setting or intensive setting 2    | 752 / 379               |
| <b>Noise level (sound power) based on dB(A) re 1 pW<sup>3,5</sup></b> |                         |
| - ducted / recirculating at power level 1                             | 52 / 63                 |
| - ducted / recirculating at power level 2                             | 57 / 70                 |
| - ducted / recirculating at power level 3                             | 64 / 73                 |
| - ducted / recirculating at power level 4 or intensive setting 1      | - / -                   |
| - ducted / recirculating, intensive setting or intensive setting 2    | 73 / 76                 |
| Pipe outlet diameter (mm)   | 150 / 120               |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)        | 550 / 650               |
| GB plug   | ■                       |
| Energy rating   | B                       |
| <b>OPTIONAL ACCESSORIES<sup>2</sup></b>                               |                         |
| Recirculating kit   | LZ10DXU00               |
| Recirculating kit (without chimney)                                   | LZ57000                 |
| Regenerative CleanAir recirculating kit                               | LZ10FXI00               |
| Regenerative CleanAir recirculating kit (without chimney)             | LZ10FXJ00               |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive.

<sup>2</sup>A type of recirculating kit is required if recirculating.

<sup>3</sup>Air Flow and noise declarations made in line with CECEC Code of Conduct.

<sup>4</sup>Measured according to EN61591 on largest pipe diameter.

<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.



### Glass hood specifications

| APPLIANCE TYPE  | STRAIGHT GLASS HOOD     | CURVED GLASS HOODS      |                         |
|---|-------------------------|-------------------------|-------------------------|
| <b>Design family</b>  | iQ300                   | iQ300                   | iQ300                   |
| Model number  | LC67GHM50B              | LC97AFM50B              | LC67AFM50B              |
| Colour  | Stainless steel & glass | Stainless steel & glass | Stainless steel & glass |
| <b>KEY FEATURES</b>   |                         |                         |                         |
| emotionLight Pro  | -                       | -                       | -                       |
| Home Connect  | -                       | -                       | -                       |
| cookConnect hob based hood control                                    | -                       | -                       | -                       |
| climateControl sensor   | -                       | -                       | -                       |
| Adjustable LED white colour temperature                               | -                       | -                       | -                       |
| iQdrive   | -                       | -                       | -                       |
| Intensive setting / Automatic intensive revert <sup>1</sup>           | ■ / ■                   | ■ / ■                   | ■ / ■                   |
| Grease / charcoal filter saturation indicators                        | - / -                   | - / -                   | - / -                   |
| <b>FEATURES</b>   |                         |                         |                         |
| Suitable for ducted / recirculating operation                         | ■ / ■                   | ■ / ■                   | ■ / ■                   |
| Type of control   | Touch Control           | Touch Control           | Touch Control           |
| Power levels  | 3 + 1 intensive         | 3 + 1 intensive         | 3 + 1 intensive         |
| Electronic power level display  | -                       | -                       | -                       |
| Interval operation  | -                       | -                       | -                       |
| Automatic after running (minutes)                                     | -                       | -                       | -                       |
| Lighting  | 2 x LED lights          | 2 x LED lights          | 2 x LED lights          |
| softLight with dimmer function  | -                       | -                       | -                       |
| Number of metal grease filter cassettes                               | 1                       | 1                       | 1                       |
| <b>PERFORMANCE/TECHNICAL INFORMATION</b>                              |                         |                         |                         |
| Appliance width (mm)  | 600                     | 900                     | 600                     |
| <b>Extraction Rate in m<sup>3</sup>/h<sup>3,4</sup></b>               |                         |                         |                         |
| - ducted / recirculating at power level 1                             | 276 / 199               | 260 / 202               | 266 / 213               |
| - ducted / recirculating at power level 2                             | 359 / 275               | 343 / 276               | 349 / 285               |
| - ducted / recirculating at power level 3                             | 470 / 329               | 463 / 327               | 474 / 331               |
| - ducted / recirculating at power level 4 or intensive setting 1      | - / -                   | - / -                   | - / -                   |
| - ducted / recirculating, intensive setting or intensive setting 2    | 697 / 382               | 702 / 380               | 715 / 379               |
| <b>Noise level (sound power) based on dB(A) re 1 pW<sup>3,5</sup></b> |                         |                         |                         |
| - ducted / recirculating at power level 1                             | 52 / 62                 | 54 / 63                 | 54 / 65                 |
| - ducted / recirculating at power level 2                             | 58 / 69                 | 60 / 70                 | 61 / 70                 |
| - ducted / recirculating at power level 3                             | 64 / 73                 | 67 / 74                 | 67 / 73                 |
| - ducted / recirculating at power level 4 or intensive setting 1      | - / -                   | - / -                   | - / -                   |
| - ducted / recirculating, intensive setting or intensive setting 2    | 72 / 76                 | 74 / 77                 | 74 / 76                 |
| Pipe outlet diameter (mm)   | 150 / 120               | 150 / 120               | 150 / 120               |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)        | 550 / 650               | 550 / 650               | 550 / 650               |
| GB plug   | ■                       | ■                       | ■                       |
| Energy rating   | B                       | B                       | B                       |
| <b>OPTIONAL ACCESSORIES<sup>2</sup></b>                               |                         |                         |                         |
| Recirculating kit   | LZ10DXU00               | LZ10DXU00               | LZ10DXU00               |
| Recirculating kit (without chimney)                                   | LZ57000                 | LZ57000                 | LZ57000                 |
| Regenerative CleanAir recirculating kit                               | LZ10FXI00               | LZ10FXI00               | LZ10FXI00               |
| Regenerative CleanAir recirculating kit (without chimney)             | LZ10FXJ00               | LZ10FXJ00               | LZ10FXJ00               |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive.

<sup>2</sup>A type of recirculating kit is required if recirculating.

<sup>3</sup>Air Flow and noise declarations made in line with CECEC Code of Conduct.

<sup>4</sup>Measured according to EN61591 on largest pipe diameter.

<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.



# Box chimney hoods

## iQ 700 LC91BUV50B

Box chimney hood  
Stainless steel

90cm



2  
Year Warranty



| APPLIANCE TYPE  | BOX CHIMNEY HOOD |
|---|------------------|
| <b>Design family</b>  | iQ 700           |
| Model number  | LC91BUV50B       |
| Colour  | Stainless steel  |
| <b>KEY FEATURES</b>   |                  |
| emotionLight Pro  | -                |
| Home Connect  | ■                |
| cookConnect hob based hood control                                    | ■                |
| climateControl sensor   | ■                |
| Adjustable LED white colour temperature                               | -                |
| iQdrive   | ■                |
| Intensive setting / Automatic intensive revert <sup>1</sup>           | ■ / ■            |
| Grease / charcoal filter saturation indicators                        | ■ / ■            |
| <b>FEATURES</b>   |                  |
| Suitable for ducted / recirculating operation                         | ■ / ■            |
| Type of control   | Touch Control    |
| Power levels  | 3 + 2 intensive  |
| Electronic power level display  | ■                |
| Interval operation  | -                |
| Automatic after running (minutes)                                     | 10               |
| Lighting  | 3 x LED lights   |
| softLight with dimmer function  | ■                |
| Number of metal grease filter cassettes                               | 3                |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                            |                  |
| Appliance width (mm)  | 898              |
| <b>Extraction Rate in m<sup>3</sup>/h<sup>3,4</sup></b>               |                  |
| - ducted / recirculating at power level 1                             | 276 / 175        |
| - ducted / recirculating at power level 2                             | 436 / 320        |
| - ducted / recirculating at power level 3                             | 601 / 362        |
| - ducted / recirculating at power level 4 or intensive setting 1      | 800 / 395        |
| - ducted / recirculating, intensive setting or intensive setting 2    | 964 / 428        |
| <b>Noise level (sound power) based on dB(A) re 1 pW<sup>5,5</sup></b> |                  |
| - ducted / recirculating at power level 1                             | 45 / 58          |
| - ducted / recirculating at power level 2                             | 56 / 70          |
| - ducted / recirculating at power level 3                             | 64 / 73          |
| - ducted / recirculating at power level 4 or intensive setting 1      | 70 / 74          |
| - ducted / recirculating, intensive setting or intensive setting 2    | 73 / 76          |
| Pipe outlet diameter (mm)   | 150 / 120        |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)        | 550 / 650        |
| GB plug   | ■                |
| Energy rating   | A+               |
| <b>OPTIONAL ACCESSORIES<sup>7</sup></b>                               |                  |
| Recirculating kit   | LZ53450          |
| Recirculating kit (without chimney)                                   | LZ57300          |
| Regenerative CleanAir recirculating kit                               | LZ10FXI05        |
| Regenerative CleanAir recirculating kit (without chimney)             | LZ10FXJ05        |

■ Yes, model has this feature. - Feature not available for this model.  
<sup>1</sup>Power automatically reverts back to normal setting after intensive.  
<sup>2</sup>A type of recirculating kit is required if recirculating.  
<sup>3</sup>Air Flow and noise declarations made in line with CECEC Code of Conduct.  
<sup>4</sup>Measured according to EN61591 on largest pipe diameter.  
<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.  
<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

## Box hood specifications



| APPLIANCE TYPE  | BOX CHIMNEY HOODS |                 |                 |                     |                     |
|---|-------------------|-----------------|-----------------|---------------------|---------------------|
| <b>Design family</b>  | iQ 300            | iQ 300          | iQ 300          | iQ 100              | iQ 100              |
| Model number  | LC97BHM50B        | LC77BHM50B      | LC67BHM50B      | LC94BBC50B          | LC64BBC50B          |
| Colour  | Stainless steel   | Stainless steel | Stainless steel | Stainless steel     | Stainless steel     |
| <b>KEY FEATURES</b>   |                   |                 |                 |                     |                     |
| emotionLight Pro  | -                 | -               | -               | -                   | -                   |
| Home Connect  | -                 | -               | -               | -                   | -                   |
| cookConnect hob based hood control                                    | -                 | -               | -               | -                   | -                   |
| climateControl sensor   | -                 | -               | -               | -                   | -                   |
| Adjustable LED white colour temperature                               | -                 | -               | -               | -                   | -                   |
| iQdrive   | -                 | -               | -               | -                   | -                   |
| Intensive setting / Automatic intensive revert <sup>1</sup>           | ■ / ■             | ■ / ■           | ■ / ■           | - / -               | - / -               |
| Grease / charcoal filter saturation indicators                        | - / -             | - / -           | - / -           | - / -               | - / -               |
| <b>FEATURES</b>   |                   |                 |                 |                     |                     |
| Suitable for ducted / recirculating operation                         | ■ / ■             | ■ / ■           | ■ / ■           | ■ / ■               | ■ / ■               |
| Type of control   | Touch Control     | Touch Control   | Touch Control   | Push Button Control | Push Button Control |
| Power levels  | 3 + 1 intensive   | 3 + 1 intensive | 3 + 1 intensive | 3                   | 3                   |
| Electronic power level display  | -                 | -               | -               | -                   | -                   |
| Interval operation  | -                 | -               | -               | -                   | -                   |
| Automatic after running (minutes)                                     | -                 | -               | -               | -                   | -                   |
| Lighting  | 2 x LED lights    | 2 x LED lights  | 2 x LED lights  | 2 x LED lights      | 2 x LED lights      |
| softLight with dimmer function  | -                 | -               | -               | -                   | -                   |
| Number of metal grease filter cassettes                               | 3                 | 2               | 2               | 3                   | 2                   |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                            |                   |                 |                 |                     |                     |
| Appliance width (mm)  | 900               | 750             | 600             | 900                 | 600                 |
| <b>Extraction Rate in m<sup>3</sup>/h<sup>3,4</sup></b>               |                   |                 |                 |                     |                     |
| - ducted / recirculating at power level 1                             | 266 / 187         | 266 / 187       | 269 / 183       | 198 / 120           | 198 / 122           |
| - ducted / recirculating at power level 2                             | 345 / 270         | 345 / 270       | 342 / 262       | 263 / 162           | 263 / 165           |
| - ducted / recirculating at power level 3                             | 453 / 324         | 453 / 324       | 458 / 321       | 365 / 195           | 365 / 197           |
| - ducted / recirculating at power level 4 or intensive setting 1      | - / -             | - / -           | - / -           | - / -               | - / -               |
| - ducted / recirculating, intensive setting or intensive setting 2    | 739 / 379         | 739 / 379       | 752 / 379       | - / -               | - / -               |
| <b>Noise level (sound power) based on dB(A) re 1 pW<sup>5,5</sup></b> |                   |                 |                 |                     |                     |
| - ducted / recirculating at power level 1                             | 52 / 63           | 52 / 63         | 52 / 63         | 49 / 55             | 49 / 56             |
| - ducted / recirculating at power level 2                             | 58 / 70           | 58 / 70         | 57 / 70         | 57 / 61             | 57 / 61             |
| - ducted / recirculating at power level 3                             | 65 / 74           | 65 / 74         | 64 / 73         | 64 / 66             | 63 / 66             |
| - ducted / recirculating at power level 4 or intensive setting 1      | - / -             | - / -           | - / -           | - / -               | - / -               |
| - ducted / recirculating, intensive setting or intensive setting 2    | 74 / 77           | 74 / 77         | 73 / 76         | - / -               | - / -               |
| Pipe outlet diameter (mm)   | 150 / 120         | 150 / 120       | 150 / 120       | 150 / 120           | 150 / 120           |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)        | 550 / 650         | 550 / 650       | 550 / 650       | 550 / 650           | 550 / 650           |
| GB plug   | ■                 | ■               | ■               | ■                   | ■                   |
| Energy rating   | B                 | B               | B               | D                   | D                   |
| <b>OPTIONAL ACCESSORIES<sup>7</sup></b>                               |                   |                 |                 |                     |                     |
| Recirculating kit   | LZ10DXU00         | LZ10DXU00       | LZ10DXU00       | LZ10DXU00           | LZ10DXU00           |
| Recirculating kit (without chimney)                                   | LZ57000           | LZ57000         | LZ57000         | LZ57000             | LZ57000             |
| Regenerative CleanAir recirculating kit                               | LZ10FXI00         | LZ10FXI00       | LZ10FXI00       | LZ10FXI00           | LZ10FXI00           |
| Regenerative CleanAir recirculating kit (without chimney)             | LZ10FXJ00         | LZ10FXJ00       | LZ10FXJ00       | LZ10FXJ00           | LZ10FXJ00           |

■ Yes, model has this feature. - Feature not available for this model.  
<sup>1</sup>Power automatically reverts back to normal setting after intensive.  
<sup>2</sup>A type of recirculating kit is required if recirculating.  
<sup>3</sup>Air Flow and noise declarations made in line with CECEC Code of Conduct.  
<sup>4</sup>Measured according to EN61591 on largest pipe diameter.  
<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.  
<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

# Pyramid hoods

## iQ 300 LC97QFM50B

Slim pyramid chimney hood  
Stainless steel

90cm



2  
Year Warranty



### Pyramid hood specifications

| APPLIANCE TYPE   | SLIM PYRAMID HOOD |
|--|-------------------|
| <b>Design family</b>   | <b>iQ 300</b>     |
| Model number   | LC97QFM50B        |
| Colour   | Stainless steel   |
| <b>KEY FEATURES</b>  |                   |
| emotionLight Pro   | -                 |
| Home Connect   | -                 |
| cookConnect hob based hood control                                     | -                 |
| climateControl sensor  | -                 |
| Adjustable LED white colour temperature                                | -                 |
| iQdrive  | -                 |
| Intensive setting / Automatic intensive revert <sup>1</sup>            | ■ / ■             |
| Grease / charcoal filter saturation indicators                         | - / -             |
| <b>FEATURES</b>  |                   |
| Suitable for ducted / recirculating operation                          | ■ / ■             |
| Type of control  | Touch Control     |
| Power levels   | 3 + 1 intensive   |
| Electronic power level display   | -                 |
| Interval operation   | -                 |
| Automatic after running (minutes)                                      | -                 |
| Lighting   | 2 x LED lights    |
| softLight with dimmer function   | -                 |
| Number of metal grease filter cassettes                                | 3                 |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                             |                   |
| Appliance width (mm)   | 900               |
| <b>Extraction Rate in m<sup>3</sup>/h <sup>3,4</sup></b>               |                   |
| - ducted / recirculating at power level 1                              | 279 / 198         |
| - ducted / recirculating at power level 2                              | 353 / 283         |
| - ducted / recirculating at power level 3                              | 462 / 346         |
| - ducted / recirculating at power level 4 or intensive setting 1       | - / -             |
| - ducted / recirculating, intensive setting or intensive setting 2     | 779 / 397         |
| <b>Noise level (sound power) based on dB(A) re 1 pW <sup>3,5</sup></b> |                   |
| - ducted / recirculating at power level 1                              | 50 / 64           |
| - ducted / recirculating at power level 2                              | 57 / 71           |
| - ducted / recirculating at power level 3                              | 64 / 74           |
| - ducted / recirculating at power level 4 or intensive setting 1       | - / -             |
| - ducted / recirculating, intensive setting or intensive setting 2     | 73 / 77           |
| Pipe outlet diameter (mm)  | 150 / 120         |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)         | 550 / 650         |
| GB plug  | ■                 |
| Energy rating  | B                 |
| <b>OPTIONAL ACCESSORIES <sup>2</sup></b>                               |                   |
| Recirculating kit  | LZ10DXU00         |
| Recirculating kit (without chimney)                                    | LZ57000           |
| Regenerative CleanAir recirculating kit                                | LZ10FXI00         |
| Regenerative CleanAir recirculating kit (without chimney)              | LZ10FXJ00         |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive.

<sup>2</sup>A type of recirculating kit is required if recirculating.

<sup>3</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

<sup>4</sup>Measured according to EN61591 on largest pipe diameter.

<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

### Pyramid hood specifications

| APPLIANCE TYPE   | SLIM PYRAMID HOOD | PYRAMID HOOD        | PYRAMID HOOD        |
|--|-------------------|---------------------|---------------------|
| <b>Design family</b>   | <b>iQ 300</b>     | <b>iQ 100</b>       | <b>iQ 100</b>       |
| Model number   | LC67QFM50B        | LC94PBC50B          | LC64PBC50B          |
| Colour   | Stainless steel   | Stainless steel     | Stainless steel     |
| <b>KEY FEATURES</b>  |                   |                     |                     |
| emotionLight Pro   | -                 | -                   | -                   |
| Home Connect   | -                 | -                   | -                   |
| cookConnect hob based hood control                                     | -                 | -                   | -                   |
| climateControl sensor  | -                 | -                   | -                   |
| Adjustable LED white colour temperature                                | -                 | -                   | -                   |
| iQdrive  | -                 | -                   | -                   |
| Intensive setting / Automatic intensive revert <sup>1</sup>            | ■ / ■             | - / -               | - / -               |
| Grease / charcoal filter saturation indicators                         | - / -             | - / -               | - / -               |
| <b>FEATURES</b>  |                   |                     |                     |
| Suitable for ducted / recirculating operation                          | ■ / ■             | ■ / ■               | ■ / ■               |
| Type of control  | Touch Control     | Push Button Control | Push Button Control |
| Power levels   | 3 + 1 intensive   | 3                   | 3                   |
| Electronic power level display   | -                 | -                   | -                   |
| Interval operation   | -                 | -                   | -                   |
| Automatic after running (minutes)                                      | -                 | -                   | -                   |
| Lighting   | 2 x LED lights    | 2 x LED lights      | 2 x LED lights      |
| softLight with dimmer function   | -                 | -                   | -                   |
| Number of metal grease filter cassettes                                | 2                 | 3                   | 2                   |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                             |                   |                     |                     |
| Appliance width (mm)   | 600               | 900                 | 600                 |
| <b>Extraction Rate in m<sup>3</sup>/h <sup>3,4</sup></b>               |                   |                     |                     |
| - ducted / recirculating at power level 1                              | 262 / 192         | 198 / 129           | 198 / 127           |
| - ducted / recirculating at power level 2                              | 339 / 275         | 263 / 174           | 263 / 171           |
| - ducted / recirculating at power level 3                              | 445 / 332         | 365 / 213           | 365 / 211           |
| - ducted / recirculating at power level 4 or intensive setting 1       | - / -             | - / -               | - / -               |
| - ducted / recirculating, intensive setting or intensive setting 2     | 747 / 389         | - / -               | - / -               |
| <b>Noise level (sound power) based on dB(A) re 1 pW <sup>3,5</sup></b> |                   |                     |                     |
| - ducted / recirculating at power level 1                              | 53 / 58           | 50 / 56             | 50 / 55             |
| - ducted / recirculating at power level 2                              | 59 / 68           | 57 / 62             | 58 / 62             |
| - ducted / recirculating at power level 3                              | 65 / 72           | 65 / 67             | 66 / 67             |
| - ducted / recirculating at power level 4 or intensive setting 1       | - / -             | - / -               | - / -               |
| - ducted / recirculating, intensive setting or intensive setting 2     | 73 / 76           | - / -               | - / -               |
| Pipe outlet diameter (mm)  | 150 / 120         | 150 / 120           | 150 / 120           |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)         | 550 / 650         | 550 / 650           | 550 / 650           |
| GB plug  | ■                 | ■                   | ■                   |
| Energy rating  | B                 | D                   | D                   |
| <b>OPTIONAL ACCESSORIES <sup>2</sup></b>                               |                   |                     |                     |
| Recirculating kit  | LZ10DXU00         | LZ52750             | LZ52750             |
| Recirculating kit (without chimney)                                    | LZ57000           | -                   | -                   |
| Regenerative CleanAir recirculating kit                                | LZ10FXI00         | -                   | -                   |
| Regenerative CleanAir recirculating kit (without chimney)              | LZ10FXJ00         | -                   | -                   |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive.

<sup>2</sup>A type of recirculating kit is required if recirculating.

<sup>3</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

<sup>4</sup>Measured according to EN61591 on largest pipe diameter.

<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

# Telescopic hoods

## iQ 500 LI97SA560B

Telescopic extractor hood  
Stainless steel

90cm



2  
Year Warranty



### Telescopic hood specifications

| APPLIANCE TYPE   | TELESCOPIC HOOD           |
|--|---------------------------|
| <b>Design family</b>   | iQ 500                    |
| Model number   | LI97SA560B                |
| Colour   | Stainless steel           |
| <b>KEY FEATURES</b>  |                           |
| emotionLight Pro   | -                         |
| Home Connect   | -                         |
| cookConnect hob based hood control                                     | -                         |
| climateControl sensor  | -                         |
| Adjustable LED white colour temperature                                | -                         |
| iQdrive  | -                         |
| Intensive setting / Automatic intensive revert <sup>1</sup>            | ■ / ■                     |
| Grease / charcoal filter saturation indicators                         | ■ / ■                     |
| <b>FEATURES</b>  |                           |
| Suitable for ducted / recirculating operation                          | ■ / ■                     |
| Type of control  | Soft Touch Button Control |
| Power levels   | 3 + 2 intensive           |
| Electronic power level display   | -                         |
| Interval operation   | -                         |
| Automatic after running (minutes)                                      | 10                        |
| Lighting   | 2 x LED lights            |
| softLight with dimmer function   | ■                         |
| Number of metal grease filter cassettes                                | 3                         |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                             |                           |
| Appliance width (mm)   | 898                       |
| <b>Extraction Rate in m<sup>3</sup>/h <sup>3,4</sup></b>               |                           |
| - ducted / recirculating at power level 1                              | 210 / 135                 |
| - ducted / recirculating at power level 2                              | 306 / 220                 |
| - ducted / recirculating at power level 3                              | 394 / 293                 |
| - ducted / recirculating at power level 4 or intensive setting 1       | 537 / 403                 |
| - ducted / recirculating, intensive setting or intensive setting 2     | 708 / 471                 |
| <b>Noise level (sound power) based on dB(A) re 1 pW <sup>3,5</sup></b> |                           |
| - ducted / recirculating at power level 1                              | 40 / 45                   |
| - ducted / recirculating at power level 2                              | 49 / 55                   |
| - ducted / recirculating at power level 3                              | 56 / 61                   |
| - ducted / recirculating at power level 4 or intensive setting 1       | 62 / 70                   |
| - ducted / recirculating, intensive setting or intensive setting 2     | 68 / 74                   |
| Pipe outlet diameter (mm)  | 150 / 120                 |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)         | 430 / 650                 |
| GB plug  | ■                         |
| Energy rating  | B                         |
| <b>OPTIONAL ACCESSORIES <sup>2</sup></b>                               |                           |
| Recirculating kit  | LZ45650                   |
| CleanAir Recirculating filter kit (stainless steel module)             | LZ46830                   |
| Replacement Regenerative CleanAir filter                               | LZ10ITP00                 |
| Steel finish profile/handle with opening for varioControl              | LZ49750                   |
| Steel finish profile/handle - black                                    | LZ49560                   |
| Lowering frame   | LZ49600                   |
| Bracket for installation in 90cm wide units                            | LZ49200                   |

■ Yes, model has this feature. - Feature not available for this model.  
<sup>1</sup>Power automatically reverts back to normal setting after intensive.  
<sup>2</sup>A type of recirculating kit is required if recirculating.  
<sup>3</sup>Air Flow and noise declarations made in line with CECEC Code of Conduct.  
<sup>4</sup>Measured according to EN61591 on largest pipe diameter.  
<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.  
<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

### Telescopic hood specifications

| APPLIANCE TYPE   | TELESCOPIC HOODS          |                           |                           |
|--|---------------------------|---------------------------|---------------------------|
| <b>Design family</b>   | iQ 500                    | iQ 300                    | iQ 300                    |
| Model number   | LI67SA560B                | LI94MA530B                | LI64MA530B                |
| Colour   | Stainless steel           | Stainless steel           | Stainless steel           |
| <b>KEY FEATURES</b>  |                           |                           |                           |
| emotionLight Pro   | -                         | -                         | -                         |
| Home Connect   | -                         | -                         | -                         |
| cookConnect hob based hood control                                     | -                         | -                         | -                         |
| climateControl sensor  | -                         | -                         | -                         |
| Adjustable LED white colour temperature                                | -                         | -                         | -                         |
| iQdrive  | -                         | -                         | -                         |
| Intensive setting / Automatic intensive revert <sup>1</sup>            | ■ / ■                     | ■ / ■                     | ■ / ■                     |
| Grease / charcoal filter saturation indicators                         | ■ / ■                     | - / -                     | - / -                     |
| <b>FEATURES</b>  |                           |                           |                           |
| Suitable for ducted / recirculating operation                          | ■ / ■                     | ■ / ■                     | ■ / ■                     |
| Type of control  | Soft Touch Button Control | Soft Touch Button Control | Soft Touch Button Control |
| Power levels   | 3 + 2 intensive           | 3 + 1 intensive           | 3 + 1 intensive           |
| Electronic power level display   | -                         | -                         | -                         |
| Interval operation   | -                         | -                         | -                         |
| Automatic after running (minutes)                                      | 10                        | 10                        | 10                        |
| Lighting   | 2 x LED lights            | 2 x LED lights            | 2 x LED lights            |
| softLight with dimmer function   | ■                         | -                         | -                         |
| Number of metal grease filter cassettes                                | 2                         | 3                         | 2                         |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                             |                           |                           |                           |
| Appliance width (mm)   | 598                       | 898                       | 598                       |
| <b>Extraction Rate in m<sup>3</sup>/h <sup>3,4</sup></b>               |                           |                           |                           |
| - ducted / recirculating at power level 1                              | 198 / 137                 | 163 / 105                 | 174 / 102                 |
| - ducted / recirculating at power level 2                              | 296 / 220                 | 223 / 140                 | 226 / 135                 |
| - ducted / recirculating at power level 3                              | 381 / 292                 | 265 / 166                 | 270 / 159                 |
| - ducted / recirculating at power level 4 or intensive setting 1       | 518 / 406                 | - / -                     | - / -                     |
| - ducted / recirculating, intensive setting or intensive setting 2     | 677 / 475                 | 412 / 178                 | 404 / 171                 |
| <b>Noise level (sound power) based on dB(A) re 1 pW <sup>3,5</sup></b> |                           |                           |                           |
| - ducted / recirculating at power level 1                              | 40 / 45                   | 50 / 57                   | 49 / 58                   |
| - ducted / recirculating at power level 2                              | 49 / 55                   | 56 / 65                   | 56 / 65                   |
| - ducted / recirculating at power level 3                              | 56 / 61                   | 63 / 70                   | 62 / 70                   |
| - ducted / recirculating at power level 4 or intensive setting 1       | 62 / 69                   | - / -                     | - / -                     |
| - ducted / recirculating, intensive setting or intensive setting 2     | 67 / 73                   | 70 / 71                   | 69 / 72                   |
| Pipe outlet diameter (mm)  | 150 / 120                 | 150 / 120                 | 150 / 120                 |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)         | 430 / 650                 | 430 / 650                 | 430 / 650                 |
| GB plug  | ■                         | ■                         | ■                         |
| Energy rating  | B                         | A                         | A                         |
| <b>OPTIONAL ACCESSORIES <sup>2</sup></b>                               |                           |                           |                           |
| Recirculating kit  | LZ45650                   | LZ45450                   | LZ45450                   |
| CleanAir Recirculating filter kit (stainless steel module)             | LZ46830                   | -                         | -                         |
| Replacement Regenerative CleanAir filter                               | LZ10ITP00                 | -                         | -                         |
| Steel finish profile/handle with opening for varioControl              | LZ46750                   | -                         | -                         |
| Steel finish profile/handle - black                                    | LZ46560                   | LZ49560                   | LZ46560                   |
| Lowering frame   | LZ46600                   | -                         | -                         |
| Bracket for installation in 90cm wide units                            | -                         | -                         | -                         |

■ Yes, model has this feature. - Feature not available for this model.  
<sup>1</sup>Power automatically reverts back to normal setting after intensive.  
<sup>2</sup>A type of recirculating kit is required if recirculating.  
<sup>3</sup>Air Flow and noise declarations made in line with CECEC Code of Conduct.  
<sup>4</sup>Measured according to EN61591 on largest pipe diameter.  
<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.  
<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

# Canopy hoods

## iQ 700 LB79585MGB

Canopy hood  
Stainless steel

70cm



Canopy hood specifications

| APPLIANCE TYPE   | CANOPY HOOD               |
|--|---------------------------|
| <b>Design family</b>   | iQ 700                    |
| Model number   | LB79585MGB                |
| Colour   | Stainless steel           |
| <b>KEY FEATURES</b>  |                           |
| emotionLight Pro   | –                         |
| Home Connect   | –                         |
| cookConnect hob based hood control                                     | –                         |
| climateControl sensor  | –                         |
| Adjustable LED white colour temperature                                | –                         |
| iQdrive  | ■                         |
| Intensive setting / Automatic intensive revert <sup>1</sup>            | ■ / ■                     |
| Grease / charcoal filter saturation indicators                         | ■ / –                     |
| <b>FEATURES</b>  |                           |
| Suitable for ducted / recirculating operation                          | ■ / ■                     |
| Type of control  | Soft Touch Button Control |
| Power levels   | 3 + 1 intensive           |
| Electronic power level display   | –                         |
| Interval operation   | ■                         |
| Automatic after running (minutes)                                      | 30                        |
| Lighting   | 2 x LED lights            |
| softLight with dimmer function   | ■                         |
| Number of metal grease filter cassettes                                | 2                         |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                             |                           |
| Appliance width (mm)   | 700                       |
| <b>Extraction Rate in m<sup>3</sup>/h <sup>3,4</sup></b>               |                           |
| – ducted / recirculating at power level 1                              | 210 / 170                 |
| – ducted / recirculating at power level 2                              | 380 / 250                 |
| – ducted / recirculating at power level 3                              | 575 / 310                 |
| – ducted / recirculating at power level 4 or intensive setting 1       | – / –                     |
| – ducted / recirculating, intensive setting or intensive setting 2     | 775 / 380                 |
| <b>Noise level (sound power) based on dB(A) re 1 pW <sup>3,5</sup></b> |                           |
| – ducted / recirculating at power level 1                              | 46 / 57                   |
| – ducted / recirculating at power level 2                              | 55 / 66                   |
| – ducted / recirculating at power level 3                              | 64 / 71                   |
| – ducted / recirculating at power level 4 or intensive setting 1       | – / –                     |
| – ducted / recirculating, intensive setting or intensive setting 2     | 70 / 75                   |
| Pipe outlet diameter (mm)  | 150 / 120                 |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)         | 500 / 650                 |
| GB plug  | ■                         |
| Energy rating  | A++                       |
| <b>OPTIONAL ACCESSORIES <sup>2</sup></b>                               |                           |
| Recirculating kit  | LZ55750                   |
| CleanAir Recirculating filter kit (stainless steel module)             | LZ46830                   |
| Replacement Regenerative CleanAir filter                               | LZ10ITP00                 |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive.

<sup>2</sup>A type of recirculating kit is required if recirculating.

<sup>3</sup>Air Flow and noise declarations made in line with CECEC Code of Conduct.

<sup>4</sup>Measured according to EN61591 on largest pipe diameter.

<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.



Canopy hood specifications

| APPLIANCE TYPE   | CANOPY HOODS              |                           |                         |                         |                         |
|--|---------------------------|---------------------------|-------------------------|-------------------------|-------------------------|
| Design family  | iQ 500                    | iQ 500                    | iQ 300                  | iQ 300                  | iQ 100                  |
| Model number   | LB78574GB                 | LB57574GB                 | LB75565GB               | LB55565GB               | LB53NAA30B              |
| Colour   | Stainless steel           | Stainless steel           | Silver metallic lacquer | Silver metallic lacquer | Silver metallic lacquer |
| <b>KEY FEATURES</b>  |                           |                           |                         |                         |                         |
| emotionLight Pro   | –                         | –                         | –                       | –                       | –                       |
| Home Connect   | –                         | –                         | –                       | –                       | –                       |
| cookConnect hob based hood control                                     | –                         | –                         | –                       | –                       | –                       |
| climateControl sensor  | –                         | –                         | –                       | –                       | –                       |
| Adjustable LED white colour temperature                                | –                         | –                         | –                       | –                       | –                       |
| iQdrive  | –                         | –                         | –                       | –                       | –                       |
| Intensive setting / Automatic intensive revert <sup>1</sup>            | ■ / ■                     | ■ / ■                     | ■ / –                   | ■ / –                   | – / –                   |
| Grease / charcoal filter saturation indicators                         | – / –                     | – / –                     | – / –                   | – / –                   | – / –                   |
| <b>FEATURES</b>  |                           |                           |                         |                         |                         |
| Suitable for ducted / recirculating operation                          | ■ / ■                     | ■ / ■                     | ■ / ■                   | ■ / ■                   | ■ / ■                   |
| Type of control  | Soft Touch Button Control | Soft Touch Button Control | Slider Switch           | Slider Switch           | Push Button Control     |
| Power levels   | 3 + 1 intensive           | 3 + 1 intensive           | 3 + 1 intensive         | 3 + 1 intensive         | 3                       |
| Electronic power level display   | –                         | –                         | –                       | –                       | –                       |
| Interval operation   | –                         | –                         | –                       | –                       | –                       |
| Automatic after running (minutes)                                      | –                         | –                         | –                       | –                       | –                       |
| Lighting   | 2 x LED lights            | 2 x LED lights            | 2 x LED lights          | 2 x LED lights          | 2 x LED lights          |
| softLight with dimmer function   | –                         | –                         | –                       | –                       | –                       |
| Number of metal grease filter cassettes                                | 2                         | 1                         | 2                       | 2                       | 1                       |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                             |                           |                           |                         |                         |                         |
| Appliance width (mm)   | 700                       | 520                       | 730                     | 530                     | 534                     |
| <b>Extraction Rate in m<sup>3</sup>/h <sup>3,4</sup></b>               |                           |                           |                         |                         |                         |
| – ducted / recirculating at power level 1                              | 345 / 210                 | 295 / 210                 | 198 / 139               | 196 / 134               | 120 / 110               |
| – ducted / recirculating at power level 2                              | 540 / 270                 | 450 / 260                 | 287 / 206               | 280 / 198               | 160 / 160               |
| – ducted / recirculating at power level 3                              | 630 / 300                 | 560 / 290                 | 379 / 278               | 362 / 268               | 300 / 300               |
| – ducted / recirculating at power level 4 or intensive setting 1       | – / –                     | – / –                     | – / –                   | – / –                   | – / –                   |
| – ducted / recirculating, intensive setting or intensive setting 2     | 730 / 310                 | 615 / 300                 | 638 / 408               | 618 / 395               | – / –                   |
| <b>Noise level (sound power) based on dB(A) re 1 pW <sup>3,5</sup></b> |                           |                           |                         |                         |                         |
| – ducted / recirculating at power level 1                              | 53 / 67                   | 50 / 66                   | 38/49                   | 38 / 49                 | 46 / 49                 |
| – ducted / recirculating at power level 2                              | 63 / 71                   | 63 / 71                   | 49/58                   | 49 / 58                 | 50 / 53                 |
| – ducted / recirculating at power level 3                              | 66 / 73                   | 67 / 74                   | 56/65                   | 56 / 64                 | 61 / 65                 |
| – ducted / recirculating at power level 4 or intensive setting 1       | – / –                     | – / –                     | – / –                   | – / –                   | – / –                   |
| – ducted / recirculating, intensive setting or intensive setting 2     | 69 / 74                   | 70 / 75                   | 68 / 72                 | 68 / 72                 | – / –                   |
| Pipe outlet diameter (mm)  | 150 / 120                 | 150 / 120                 | 150 / 120               | 150 / 120               | 120                     |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)         | 500 / 650                 | 500 / 650                 | 650 / 650               | 650 / 650               | 550 / 650               |
| GB plug  | ■                         | ■                         | ■                       | ■                       | ■                       |
| Energy rating  | C                         | C                         | C                       | C                       | D                       |
| <b>OPTIONAL ACCESSORIES <sup>2</sup></b>                               |                           |                           |                         |                         |                         |
| Recirculating kit  | LZ55750                   | LZ55750                   | LZ73050                 | LZ73050                 | LZ10INT00               |
| CleanAir Recirculating filter kit (stainless steel module)             | LZ46830                   | LZ46830                   | –                       | –                       | –                       |
| Replacement Regenerative CleanAir filter                               | LZ10ITP00                 | LZ10ITP00                 | –                       | –                       | –                       |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive.

<sup>2</sup>A type of recirculating kit is required if recirculating.

<sup>3</sup>Air Flow and noise declarations made in line with CECEC Code of Conduct.

<sup>4</sup>Measured according to EN61591 on largest pipe diameter.

<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.





Model shown:  
LE66MAC00B integrated extractor hood

# Integrated hoods

## iQ 100 LE66MAC00B

Integrated extractor hood  
Metallic silver

60cm



2  
Year Warranty

### Integrated hood specifications



| APPLIANCE TYPE  | INTEGRATED HOODS        |                         |
|---|-------------------------|-------------------------|
|   | iQ 100                  | iQ 100                  |
| Design family   | LE66MAC00B              | LE63MAC00B              |
| Model number  | LE66MAC00B              | LE63MAC00B              |
| Colour  | Silver Metallic Lacquer | Silver Metallic Lacquer |
| <b>KEY FEATURES</b>   |                         |                         |
| emotionLight Pro  | -                       | -                       |
| Home Connect  | -                       | -                       |
| cookConnect hob based hood control                                    | -                       | -                       |
| climateControl sensor   | -                       | -                       |
| Adjustable LED white colour temperature                               | -                       | -                       |
| iQdrive   | -                       | -                       |
| Intensive setting / Automatic intensive revert <sup>1</sup>           | - / -                   | - / -                   |
| Grease / charcoal filter saturation indicators                        | - / -                   | - / -                   |
| <b>FEATURES</b>   |                         |                         |
| Suitable for ducted / recirculating operation                         | ■ / ■                   | ■ / ■                   |
| Type of control   | Push Button Control     | Push Button Control     |
| Power levels  | 3                       | 3                       |
| Electronic power level display  | -                       | -                       |
| Interval operation  | -                       | -                       |
| Automatic after running (minutes)                                     | -                       | -                       |
| Lighting  | 2 x LED lights          | 2 x LED lights          |
| softLight with dimmer function  | -                       | -                       |
| Number of metal grease filter cassettes                               | 2                       | 2                       |
| <b>PERFORMANCE / TECHNICAL INFORMATION</b>                            |                         |                         |
| Appliance width (mm)  | 599                     | 599                     |
| <b>Extraction Rate in m<sup>3</sup>/h<sup>3,4</sup></b>               |                         |                         |
| - ducted / recirculating at power level 1                             | 256 / 208               | 240 / 224               |
| - ducted / recirculating at power level 2                             | 352 / 320               | 288 / 256               |
| - ducted / recirculating at power level 3                             | 625 / 416               | 368 / 272               |
| - ducted / recirculating at power level 4 or intensive setting 1      | - / -                   | - / -                   |
| - ducted / recirculating, intensive setting or intensive setting 2    | - / -                   | - / -                   |
| <b>Noise level (sound power) based on dB(A) re 1 pW<sup>3,5</sup></b> |                         |                         |
| - ducted / recirculating at power level 1                             | 49 / 57                 | 52 / 64                 |
| - ducted / recirculating at power level 2                             | 56 / 68                 | 56 / 67                 |
| - ducted / recirculating at power level 3                             | 70 / 75                 | 62 / 68                 |
| - ducted / recirculating at power level 4 or intensive setting 1      | - / -                   | - / -                   |
| - ducted / recirculating, intensive setting or intensive setting 2    | - / -                   | - / -                   |
| Pipe outlet diameter (mm)   | 150 / 120               | 150 / 120               |
| Minimum distance above an electric / gas hob <sup>6</sup> (mm)        | 500 / 650               | 500 / 650               |
| GB plug   | ■                       | ■                       |
| Energy rating   | B                       | D                       |
| <b>OPTIONAL ACCESSORIES<sup>2</sup></b>                               |                         |                         |
| Recirculating kit   | LZ10IMA00               | LZ10IMA00               |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive.

<sup>2</sup>A type of recirculating kit is required if recirculating.

<sup>3</sup>Air Flow and noise declarations made in line with CECEC Code of Conduct.

<sup>4</sup>Measured according to EN61591 on largest pipe diameter.

<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

# Intelligent refrigeration and freezing appliances for long lasting freshness.

Siemens built-in cooling appliances provide the ultimate way to store food flexibly and correctly for even more freshness.

From our smallest built-in fridge to our most impressive studioLine aCool range, each appliance brings you more freshness and convenience. Now you are finally able to combine Siemens cooling appliances exactly the way you want – with the right combinations for every individual requirement, taste and kitchen design. Siemens built-in fridges, freezers and wine coolers come in a wide range of models so that you have full flexibility when planning your kitchen.

Siemens cooling warranties:

**5 Year Warranty**  
A Siemens five year warranty is available on all Siemens built-in aCool appliances and freestanding American fridge freezers listed in this brochure to protect against manufacturing or material faults and defects during this warranty period.

**2 Year Warranty**  
All Siemens cooling appliances have a two year manufacturer's warranty as standard to protect against manufacturing or material faults.

**Compressor Drive 10 Year Warranty**  
Available on selected Siemens built-in fridges and fridge freezers, this warranty covers defects in the compressor motor.

To find out more about your warranty and for registration please refer to page 179.




# Keep your food fresher for longer: hyperFresh technology.




Model shown: hyperFresh premium

Set the right conditions to ensure your food stays fresher for longer: hyperFresh humidity drawers and 0°C chiller drawers.

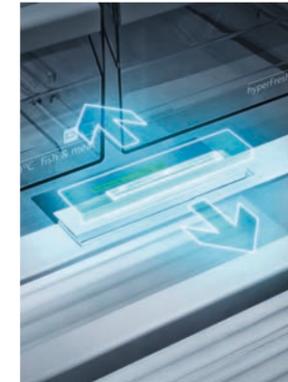

**Freshness controlled: hyperFresh**  
Simply use the stylish control panel to adjust the humidity in the fridge. The hyperFresh drawer with rippled base allows cool air to circulate around your fruit and vegetables easily. As a result, the quality and freshness of your food will be retained.

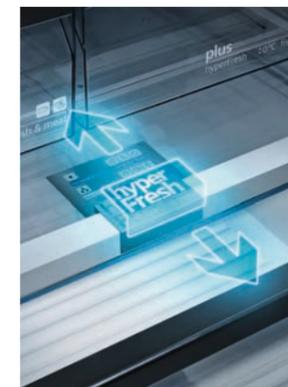

**Shelf life maximised: hyperFresh plus**  
The hyperFresh plus drawer doesn't just store food, it provides the right conditions to keep them fresher for longer. Whether it's fruit or vegetables, increase shelf life and reduce food waste. Simply switch between the 2 control settings, and the humidity will be adjusted for optimum storage of your food.



**Food stays fresh for longer: hyperFresh premium**  
Enjoy fresher food with hyperFresh premium. With a choice of 3 humidity controls, simply select whether it's fruit, vegetables, or both that you want to store. The hyperFresh Premium drawer will regulate how much humidity your food receives. Be in control; these innovative drawers help to keep in nutrients and minerals to create delicious meals and fewer trips to the supermarkets, saving you time, effort and money. hyperFresh Premium is available in selected Siemens single door fridges only.



**hyperFresh 0°C chiller drawers. Perfectly fresh for fish and meat:**  
**hyperFresh and hyperFresh plus models:**  
The two hyperFresh 0°C chiller drawers are especially designed for the storage needs of fish and meat. Keep them fresher in ideal conditions near 0°C to retain the vitamins and minerals for longer. With two separate compartments the transfer of unpleasant smells will be avoided.

**hyperFresh Premium models:** These variants come complete with a larger full-length 0°C chiller drawer, where fish and meat are stored at the perfect temperature.

# Create a combination to fit your lifestyle.

Our cooling appliances come in a wide range of heights and widths to allow you to create the perfect combination for your kitchen.

↑  
**177.2**  
cm  
↓

Height

◀ **59.8** ▶  
cm

Width

**Height and width**  
Our built-in cooling appliances are available in a range of heights and widths to fit your kitchen design and available space.

## Height and width:

All dimensions are shown as Height x Width


| aCool  | American Style   | Fridge Freezers  | Single Door Fridges   | Single Door Freezers   |
|--|--|--|---|--|
|  |  |  |  |  |
| 212.5 x 90.8cm<br>212.5 x 75.6cm<br>212.5 x 60.3cm<br>212.5 x 45.1cm               | 178.6 x 90.8cm<br>177 x 91cm<br>175.6 x 91.2cm                                     | 177.2 x 55.8cm<br>177.2 x 54.1cm   | 177.2 x 59.8cm<br>177.2 x 54cm<br>139.7 x 55.8cm<br>122.1 x 54.1cm<br>82 x 59.8cm   | 177.2 x 55.8cm<br>82 x 59.8cm  |

## Fridge Freezer split options:

60  
40

Fridge  
Freezer split %

**Fridge Freezer split**  
Our range of fridge freezers are available in a variety of sizes with different splits of fridge areas and freezer areas. Alternatively, you can create a bespoke split using separate fridge and freezer units stacked or paired side-by-side.

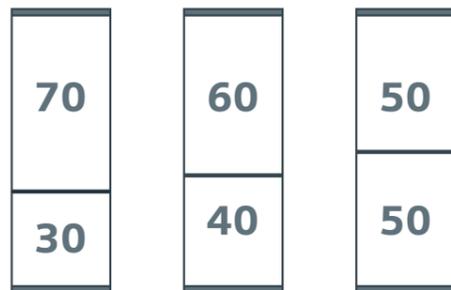

## Flexible shelves and door racks.

Expect nothing but convenience with easyLift shelves. Even when full, you can raise or lower the shelf by 6cm to make room for taller items – ideal for serving jugs. Our easyLift door trays are also great for large bottles in the fridge door, the shelf can be adjusted to meet the flexible requirements of your lifestyle.



Over and under example for illustrative purposes

## Flexible modularFit cooling integrated appliances.

**Siemens modularFit appliances are freely combinable.**

You need a kitchen that matches your lifestyle. That's why you're able to combine our single door cooling and freezing appliances exactly the way you want – with the right combinations for every individual requirement and taste. But the flexibility does not stop with the way you can arrange your kitchen. With unique and innovative cooling technologies the appliances even enrich your everyday life. Siemens modularFit appliances come with a feeling of flexibility and exciting innovations like hyperFresh and noFrost technology. The simple installation as well as an energy efficiency category up to A+++ offers maximum flexibility and freshness.

**Combine your cooling and freezing appliances the way you want: modularFit.** Whether it is on top or next to each other: thanks to the anti-condensation technology you are able to match cooling and freezing appliances however you like. The innovative technology prevents build-up of moisture between the appliances.



Side-by-side example for illustrative purposes

# Explore more cooling features.

## Experience intelligent cool with Home Connect.

### Home Connect fridges

Cooling appliances with Home Connect offer you the ability to flexibly control your appliances using your mobile phone or smart phone. This means you can control your appliance out of home; for example adjusting the fridge temperature to cool down as you are on your way home from a food shop, for extra convenience, and setting your fridge to holiday mode whilst at the airport.



## Energy efficient cooling



Nearly every cooling appliance in the new Siemens built-in range is up to 20% more energy efficient than its equivalent A-rated appliance.

With ratings from A+++ to A, discover our range of energy efficient cooling appliances.

## Type of control



In-door LCD display precision control at the touch of a button. The in-door LCD display allows the optimum temperature for food to be maintained easily, which in turn keeps your food fresher for longer.



Interior LCD display

## LED Light



The new integrated long-lasting LED lights available on most of our range fit flush in the side walls or ceiling and illuminate the interior uniformly and perfectly without blinding you.



## Storage solutions for all of your needs



Telescopic rails



Bottle rack



freshProtectbox



**Ergonomically ideal access**  
Fully-retractable drawers on telescopic rails create an easy access shelving zone. This allows you to easily pull the drawers out further, giving you a better overview of all food items and making them easier to remove.



**Bottle rack**  
Available on some models, the perfect place to store wine of all varieties and make the best use of space in your fridge. The wave-shaped bottle rack can be positioned in a variety of places and safely stores bottles without them rolling back and forth.



**freshProtectbox**  
Provides the optimum temperature for individual foods, allowing them to stay fresher for longer. Fresh ingredients are critical to delicious meals, but also count for less wastage and fewer trips to the supermarket – saving you, the consumer, time and money.

## Choosing the right hinge: fixed and sliding.

Siemens built-in cooling appliances are available with specific types of hinges that either aid the installation and design of your kitchen or can be matched for replacement appliances.



### Fixed hinge

A fixed hinge means that the furniture door is mounted to the appliance door. Advantages of a fixed hinge mean that Siemens can offer softClosing doors that automatically close at an angle of approx 15°-20° preventing the door from accidentally being left open. The installation also offers better access to the appliance interior and due to the optimised width, higher energy efficiency with competitive volume.

### Sliding hinge

A sliding hinge means that the furniture door is mounted at the kitchen cabinet body as well as a sliding rail to connect the fridge and furniture door.



### Heavy duty softClose

Adding to the ambience of any kitchen, the heavy duty softClose hinge dampens the closing of the door even when shut forcefully to keep your kitchen feeling calm.

They are thoroughly tested to withstand constant opening and closing, the softClose door retracts effortlessly and creates minimal noise. In addition to aesthetics, a softClose door ensures that items within the fridge aren't disturbed from a heavy impact, meaning no spills to clean.

Heavy duty softClose hinge is available on aCool models only.

# Freezer features.



Model shown: K186FHD40 studioLine noFrost fridge freezer

With noFrost technology you'll never have the job of defrosting the freezer again.



**noFrost**  
Defrosting the freezer is now done automatically. Siemens freezers are equipped with intelligent sensor-controlled technology to save the chore of defrosting the freezer. An air-circulation system guides the humidity to the outside of the refrigerator into an external evaporation tray, and sensors measure the degree of humidity and any frost production – ensuring the appliance is periodically defrosted without the need to turn off the appliance or empty it out. Also, ice no longer forms on the inside of the refrigerator, and the appliance's energy consumption remains consistently low.



**lowFrost**  
For those models that come with lowFrost, life is still made easier. lowFrost reduces the build-up of frost by up to 50%, so there is no need to defrost the freezer as often, only once every 3 to 4 years. Designed to save you time and provide added convenience, you can spend your time on the things you enjoy, not defrosting your freezer.

## Storage made easy with bigBox



Big enough for your lifestyle, the bigBox has the capacity for storing whole frozen turkeys, as well as the height to hold dessert glasses upright. Ideal for the holidays and entertaining.



Model shown: KA92NLB35G American fridge freezer



**superFreeze function**  
superFreeze makes sure that warmer food added to the freezer doesn't raise the freezer temperature, stopping food partially defrosting.



**Easy to refill for continuous ice: the iceTwister.**  
Enjoy your own personal ice cube service. Simply activate the iceTwister and receive up to 20 ice cubes at once right away. The water tank is very easy to remove for reliable refilling.



**superCool**  
You can use the superCool button to quickly reduce the temperature in the refrigerator to +2 °C. This prevents an undesirable rise in the temperature of your already chilled food whenever you add food that is not as cold.



**iceDispenser**  
Models with this feature are able to dispense ice when needed thanks to a plumbed water connection. Depending on model, ice is available as cubes or crushed.



## studioLine: exquisitely designed cooling appliances.

An ultimate collection with the very best food and drink storage solutions.

Beautifully designed top of the range cooling appliances, created to impress.

With high quality materials and finishes, a classic but striking appearance and superior features our studioLine and studioLine aCool models are sure to be a talking point in your kitchen. Across the range explore adjustable LED lights, Home Connect, full colour TFT displays, and flexible food and wine shelving storage solutions.

studioLine

# Key features: studioLine.

## Discover our most sophisticated cooling appliance range: aCool

aCool appliances allow you to create bespoke designs that are both elegant and functional to suit your individual taste. Although they may be behind closed doors our stunning range of built-in cooling appliances will become the talking point of any kitchen.

aCool appliances are the ultimate in refrigeration and freezing for your kitchen. Designed to impress, they feature ample storage space and ensure your kitchen makes a statement. The modular range means that you have the choice to fit each appliance in different combinations. The aCool range includes fridges, freezers and wine cabinets. aCool accessories are sold separately, please speak to your preferred kitchen specialist for installation options and more information.

5

Year Warranty

### Five Year warranty

A Five Year Warranty is offered on all studioLine aCool appliances to cover manufacturing or material faults. For more information please see page 179.



Sabbath mode

### Sabbath mode

When Sabbath mode is switched on, the following settings are switched off: audible signals, interior lighting, automatic super freezing, messages on the display panel, the background illumination of the display panel is reduced and buttons are locked.



Holiday mode

### Holiday mode

When you're on holiday or a business trip, Holiday Mode will ensure that food in the freezer stays cold enough to maintain freshness whilst reducing its energy output. Our fridges also feature a warning alarm that signals when the door has been left open, ensuring that energy isn't needlessly wasted and preserving the food inside.



### Heavy duty hinge

The heavy duty softClose hinges dampen the closing of the door even when shut forcefully to keep your kitchen feeling calm. They are thoroughly tested to withstand constant opening and closing.



### Multi-level glass shelves with back wall hanging system and door bin adjustments

Easily and practically move both the door bins and back wall shelves up and down to suit your storage requirements and create additional space for extra tall items. Customise the internal storage of your cooling appliance around your lifestyle and individual preference.



TFT Display

### TFT colour user interface

Control all functions of your aCool appliance with just a soft touch on the clearly arranged full touchControl TFT colour display. Especially practical yet precise temperature setting.



Ice cube maker

### Ice cube maker and container

Convenient and simple to use our models with the integrated ice cube maker deliver ice cubes whenever you want them. Ice cubes can simply be scooped out directly from the ice box container.



Telescopic rails

### Improved interior flexibility with telescopic rails

Thanks to the fully retractable drawers on telescopic rails, you can easily pull the drawers out further to give you a better overview of all food items, making them easier to remove.



LED illumination

### Brings more light into the dark: LED lighting

The new integrated long-lasting LED lights are flush in the side walls or ceiling and illuminate the interior brightly and evenly without dazzling. The wine coolers even come with a choice of five different light scenarios to choose from. It's also possible to direct the intensity of lighting in two out of three different compartments, thus creating individual light ambiances.

# Combined to stand out: studioLine.

The closer to perfection you get, the more you'll find in the details. That's why every single one of our premium aCool appliances follows the principle of the perfect fit.

We understand that the idea of the perfect cooling zone solution shouldn't be restricted. That's why it's possible to combine appliances from the aCool range together seamlessly, whether it be fridge and freezer, fridge freezer and wine cabinet, or even a bank of three or four models. Bring together these appliances in any way you wish for unique cooling customisation. The doors on our aCool range are all fully reversible so you can even swap the position of the handle to suit your kitchen space.

Our examples will give you an impression of the possibilities that these appliances can create within your home.



Models shown: **CI36TP02** aCool fridge freezer and **CI24WP03** aCool wine cooler



Models shown: **CI18WP03** aCool wine cooler and **CI30BP02** aCool fridge freezer



Models shown: **CI30RP02** aCool 75cm wide fridge and **CI24WP03** aCool wine cooler

# aCool fridge freezers and fridges

**5** Year Warranty  
A Five year warranty is offered on all aCool appliances to cover manufacturing or material faults. For more information please see page 179.

## iQ 700 CI36TP02

aCool Fridge with two doors and one fully extendable noFrost freezer drawer  
212cm high

Grand opening.  
Every day.

Packed with innovative features, the all new studioLine premium built-in fridge freezer opens up to a massive and clear view.



The iQ700 aCool fridge freezer with French door is expertly designed to offer generous storage space for your fresh food, while the pull out drawer freezer is easily accessible for all your frozen food. Speak to your kitchen designer about how Siemens aCool appliances could create a lasting impression in your kitchen.

### multiAirflow system

This system works with the electronics to optimise the air circulation within the fridge and freezer compartments to ensure even cooling throughout the appliance. This means it will cool your groceries quickly no matter where they are placed. The back wall of the appliance has open vents which work with the cooling circuit to draw cold air into each compartment.



**hyperFresh Plus keeps food fresher for longer**  
The hyperFresh Plus drawer doesn't just store food, it provides them with the right conditions to keep them fresher for longer. Using the slider select whether it's fruit or vegetables, fish or meat, simply switch the control and the humidity will be adjusted for optimum storage of food.



### aCool fridge specifications

| APPLIANCE TYPE  | FRIDGE WITH TWO DOORS AND ONE FULLY EXTENDABLE NOFROST FREEZER DRAWER         | FRIDGE WITH ONE DOOR AND ONE FULLY EXTENDABLE NOFROST FREEZER DRAWER    | 60CM WIDE NOFROST BUILT-IN FRIDGE                         | 75CM WIDE NOFROST BUILT-IN FRIDGE                         |
|---|---|---|---|---|
| Design family   | iQ 700  | iQ 700  | iQ 700  | iQ 700  |
| Model number  | CI36TP02  | CI30BP02  | CI24RP02  | CI30RP02  |
| <b>DESIGN FEATURES</b>  |   |   |   |   |
| Flexible rail system for shelves and door racks                   | ■   | ■   | ■   | ■   |
| Type of hinge   | Heavy duty fixed  | Heavy duty fixed  | Heavy duty fixed  | Heavy duty fixed  |
| Reversible door   | Left and right doors  | Right reversible  | Right reversible  | Right reversible  |
| Light   | LED   | LED   | LED   | LED   |
| Number of compressors   | 2   | 2   | 1   | 1   |
| Number of cooling circuits  | 2   | 2   | 1   | 1   |
| Number of temperature zones                                       | 2   | 2   | 2   | 2   |
| <b>FOOD FRESHNESS SYSTEM</b>                                      |   |   |   |   |
| multiAirflow system   | ■   | ■   | ■   | ■   |
| 0° hyperFresh Plus temperature controlled drawer                  | ■   | ■   | ■   | ■   |
| <b>KEY FEATURES – FRIDGE SECTION</b>                              |   |   |   |   |
| Compressor drive motor  | –   | –   | –   | –   |
| Temperature display   | TFT display   | TFT display   | TFT display   | TFT display   |
| Number of shelves   | 3   | 3   | 4   | 4   |
| Number of drawers - full extension                                | 1   | 1   | –   | –   |
| Food preservation drawers with ribbed bottom and humidity control | crisperBox / hyperFresh Plus  | crisperBox / hyperFresh Plus  | crisperBox, hyperFresh Plus, hyperFresh Pro               | crisperBox, hyperFresh Plus, hyperFresh Pro               |
| Compartments  | Beverages, cheese, meat, vegetable  | Beverages, cheese, meat, vegetable                                      | Beverages, cheese, meat, vegetable                        | Beverages, cheese, meat, vegetable                        |
| Number of door bins   | 2 large, 4 small  | 1 large, 2 small  | 1 large, 3 small  | 1 large, 3 small  |
| Fast cooling switch   | ■   | ■   | ■   | ■   |
| Interior ventilation  | ■   | ■   | ■   | ■   |
| <b>KEY FEATURES – FREEZER SECTION</b>                             |   |   |   |   |
| Temperature display   | TFT display   | TFT display   | –   | –   |
| Internal automatic ice cube maker                                 | ■   | ■   | –   | –   |
| <b>FUNCTIONS</b>  |   |   |   |   |
| Home Connect  | ■   | ■   | ■   | ■   |
| Warning signal door open  | Acoustic  | Acoustic  | Acoustic  | Acoustic  |
| Additional settings   | Economy setting / holiday mode / Sabbath mode / superCool / superFreeze       | Economy setting / holiday mode / Sabbath mode / superCool / superFreeze | Economy setting / holiday mode / Sabbath mode / superCool | Economy setting / holiday mode / Sabbath mode / superCool |
| Temperature adjustable  | ■   | ■   | ■   | ■   |
| Warning / malfunction signal                                      | Warning signal door open  | Warning signal door open  | Warning signal door open                                  | Warning signal door open                                  |
| <b>ACCESSORIES</b>  |   |   |   |   |
| Optional accessories  | CI36Z490 / CI10ZH10<br>CI10Z491 / CI60Z000<br>CI60Z200 / CI36Z410<br>FI50Z000 | CI30Z5TB2 / CI10ZH10<br>CI10Z591 / CI60Z000<br>CI60Z200 / CI30Z200      | FI24Z090 / CI10ZH10<br>CI60Z000 / CI60Z200<br>CI24Z010    | FI30Z090 / CI10ZH10<br>CI60Z000 / CI60Z200<br>CI30Z010    |
| <b>DIMENSIONS AND INSTALLATION</b>                                |   |   |   |   |
| Climate class   | SN-T  | SN-T  | SN-T  | SN-T  |
| Height of the product (mm)  | 2125  | 2125  | 2125  | 2125  |
| Width of the product (mm)   | 908   | 756   | 603   | 756   |
| Depth of the product (mm)   | 608   | 608   | 608   | 608   |
| <b>PERFORMANCE AND CONSUMPTION</b>                                |   |   |   |   |
| Energy efficiency class   | A++   | A++   | A++   | A++   |
| Annual energy consumption <sup>1</sup> (kWh)                      | 346   | 301   | 131   | 141   |
| Unit net capacity - total (litres)                                | 518   | 418   | 356   | 463   |
| Unit net capacity - fridge (litres)                               | 378   | 308   | 321   | 416   |
| Separate 0° compartment net capacity (litres)                     | 34  | 27  | 35  | 47  |
| Unit net capacity - freezer (litres)                              | 140   | 110   | –   | –   |
| Noise level (dB)  | 42  | 42  | 40  | 40  |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Actual energy consumption will depend on how the appliance is used and where it is located.

# aCool freezers and wine coolers

**5**  
Year Warranty


**5 Year Warranty**  
A Five year warranty is offered on all aCool appliances to cover manufacturing or material faults. For more information please see page 179.

## IQ 700 FI24NP32

aCool built-in noFrost freezer  
212cm high

Beautifully displayed.  
Immaculately stored.

The premium built-in wine coolers and freezers are designed to impress with their outstanding features and exceptional finish.



**No more defrosting: the noFrost technology**  
With noFrost, a ventilation system diverts the humidity from the freezer compartment. As a result, the air remains dry. This reliably prevents frost from forming on the inside of the appliance or on your food.

**Temperature adjustable zones**  
All of our aCool appliances offer the ability to store different food and drink in multiple temperature zones within one appliance. With our wine cabinets store your wines on beautifully crafted oak shelving areas that offer independently controlled conditions from 5 – 2°C's, perfect for different times of wines in a single cooler.



aCool freezer / wine cooler specifications

| APPLIANCE TYPE  | 60CM WIDE NOFROST BUILT-IN FREEZER  | 75CM WIDE NOFROST BUILT-IN FREEZER                                | 60CM WIDE BUILT-IN WINE CABINET   | 45CM WIDE BUILT-IN WINE CABINET   |
|---|---|---|---|---|
| Design family   | IQ 700  | IQ 700  | IQ 700  | IQ 700  |
| Model Number  | FI24NP32  | FI30NP32  | CI24WP03  | CI18WP03  |
| <b>DESIGN FEATURES</b>  |   |   |   |   |
| Flexible rail system for shelves and door racks                 | ■   | ■   | –   | –   |
| Type of hinge   | Heavy duty fixed  | Heavy duty fixed  | Heavy duty fixed  | Heavy duty fixed  |
| Reversible door   | Right reversible  | Right reversible  | Right reversible. Tinted tempered glass door protects from UV light           | Right reversible. Tinted tempered glass door protects from UV light           |
| Light   | LED   | LED   | LED   | LED   |
| Number of compressors   | 1   | 1   | 1 Anti-vibration motor  | 1 Anti-vibration motor  |
| Number of cooling circuits                                      | 1   | 1   | 1   | 1   |
| Number of temperature zones                                     | 1   | 1   | 3   | 2   |
| <b>FOOD FRESHNESS SYSTEM</b>                                    |   |   |   |   |
| multiAirflow system   | –   | –   | –   | –   |
| 0° hyperFresh Plus temperature controlled drawer                | –   | –   | –   | –   |
| <b>KEY FEATURES – FRIDGE SECTION</b>                            |   |   |   |   |
| Compressor drive motor  | –   | –   | –   | –   |
| Temperature display   | –   | –   | TFT display   | TFT display   |
| Number of shelves   | –   | –   | 12 storage areas for 92 bottles   | 11 storage areas for 58 bottles   |
| Number of drawers - full extension                              | –   | –   | Presenter shelf and 5 different lighting scenarios                            | Presenter shelf and 5 different lighting scenarios                            |
| Food preservation drawers with ribbed bottom & humidity control | –   | –   | –   | –   |
| Compartments  | –   | –   | –   | –   |
| Number of door bins   | –   | –   | –   | –   |
| Fast cooling switch   | –   | –   | –   | –   |
| Interior ventilation  | –   | –   | ■   | ■   |
| <b>KEY FEATURES – FREEZER SECTION</b>                           |   |   |   |   |
| Temperature display   | LED   | LED   | –   | –   |
| Internal automatic ice cube maker                               | ■   | –   | –   | –   |
| Number of drawers with telescopic rails                         | 2   | 2   | –   | –   |
| Number of shelves   | 4   | 2   | –   | –   |
| Number of door bins   | 4   | 2   | –   | –   |
| <b>FUNCTIONS</b>  |   |   |   |   |
| Home Connect  | ■   | ■   | ■   | ■   |
| Warning signal door open  | Acoustic  | Acoustic  | Acoustic  | Acoustic  |
| Additional settings   | Economy setting / holiday mode / Sabbath mode / superCool                     | Economy setting / holiday mode / Sabbath mode / superCool         | Economy setting / Holiday mode / Sabbath mode                                 | Economy setting / Holiday mode  |
| Temperature adjustable  | ■   | ■   | ■   | ■   |
| Warning / malfunction signal                                    | Warning signal door open  | Warning signal door open  | Warning signal door open  | Warning signal door open  |
| <b>ACCESSORIES</b>  |   |   |   |   |
| Optional accessories  | FI24Z090 / CI10ZH10<br>CI60Z000 / CI60ZBL1<br>CI60Z200 / FI24Z010<br>FI50Z000 | FI30Z090 / CI10ZH10<br>CI60Z000 / CI60ZBL1<br>FI30Z000 / FI50Z000 | CI24Z590 / CI24Z690<br>CI10ZH10 / CI60Z000<br>CI60Z200 / CI60Z300<br>CI24Z010 | CI18Z590 / CI18Z690<br>CI10ZH10 / CI60Z000<br>CI60Z200 / CI60Z300<br>CI18Z010 |
| <b>DIMENSIONS AND INSTALLATION</b>                              |   |   |   |   |
| Climate class   | SN-T  | SN-T  | SN-T  | SN-T  |
| Height of the product (mm)                                      | 2125  | 2125  | 2125  | 2125  |
| Width of the product (mm)                                       | 603   | 756   | 603   | 451   |
| Depth of the product (mm)                                       | 608   | 608   | 608   | 608   |
| <b>PERFORMANCE AND CONSUMPTION</b>                              |   |   |   |   |
| Energy efficiency class   | A++   | A++   | A   | A   |
| Annual energy consumption <sup>1</sup> (kWh)                    | 284   | 340   | 171   | 167   |
| Unit net capacity - total (litres)                              | 328   | 429   | 361   | 263   |
| Unit net capacity - fridge (litres)                             | –   | –   | –   | –   |
| Separate 0° compartment net capacity (litres)                   | –   | –   | –   | –   |
| Unit net capacity - freezer (litres)                            | 328   | 429   | –   | –   |
| Noise level (dB)  | 42  | 42  | 42  | 42  |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.

# American fridge freezers

**5** Year Warranty  
A Five year warranty is offered on all American fridge freezer appliances to cover manufacturing or material faults. For more information please see page 179.

## American fridge freezers.

If you have extra kitchen space our stunning larger capacity iQ700, iQ500 and iQ300 American fridge freezers all feature innovative indoor electronics, intelligent noFrost technology, interior LED lighting, a minimum of 4 fridge shelf positions and 2 freezer compartments with superFreeze function, and are a welcome statement to any kitchen. Modern and classic in their appearance, choose from Siemens striking and sleek black glass, Inox-easyclean or stainless steel options.



### American fridge freezer specifications

| APPLIANCE TYPE                               | iQ700  | FREESTANDING 60CM  | iQ500                                       |
|--|--|--|---|
| <b>Design family</b>                         | iQ700  | iQ500  | iQ500                                       |
| Model number                                 | KA92NLB35G   | KA92DAI20G   | KA90DVI20G                                  |
| Availability                                 |  |  |   |
| <b>DESIGN FEATURES</b>                       |  |  |   |
| Colour of door panels                        | Black glass  | Inox-easyclean   | Stainless steel                             |
| Colour of sides                              | Chrome Inox-metallic   | Chrome Inox-metallic   | Grey  |
| Style of handle                              | Integrated vertical handle   | Vertical bar handle  | Vertical bar handle                         |
| Colour of handle                             | -  | Stainless steel  | Stainless steel                             |
| noFrost in fridge and freezer                | ■  | ■  | ■   |
| Home Connect, Wi-Fi dongle included          | -  | ■  | -   |
| <b>FOOD FRESHNESS SYSTEM</b>                 |  |  |   |
| hyperFresh                                   | 1 hyperfresh drawer with telescopic rails<br>1 vegetable drawer with telescopic rails<br>1 Chiller | 1 hyperfresh drawer with telescopic rails<br>1 vegetable drawer with telescopic rails<br>1 Chiller | 2 vegetable drawers on rails                |
| <b>KEY FEATURES – FRIDGE SECTION</b>         |  |  |   |
| Product highlights                           | LED  | LED  | LED   |
| Compressor drive motor                       | ■  | -  | -   |
| superCool                                    | ■  | ■  | ■   |
| Type of control                              | Electronic   | Electronic   | Electronic                                  |
| Number of shelves                            | 4  | 4  | 4   |
| Number of adjustable shelves                 | 3  | 3  | 1   |
| Shelves for bottles                          | ■  | ■  | -   |
| Number of door bins / shelves                | 5  | 4  | 4   |
| Temperature display                          | Digital  | Digital  | Digital                                     |
| Warning signal door open                     | Visual and audible   | Visual and audible   | Visual and audible                          |
| <b>KEY FEATURES – FREEZER SECTION</b>        |  |  |   |
| Door opened indicator                        | Visual and audible   | Visual and audible   | Visual and audible                          |
| superFreeze function                         | ■  | ■  | ■   |
| Temperature adjustable in freezer            | ■  | ■  | ■   |
| Number of ice cube trays                     | Twist ice box  | Automatic ice cube maker   | Automatic ice cube maker                    |
| Ice dispenser features                       | -  | Crushed ice, ice cubes, water, water filter  | Crushed ice, ice cubes, water, water filter |
| Number of freezer drawers                    | 2  | 2  | 2   |
| <b>ADDITIONAL INFORMATION</b>                |  |  |   |
| Energy efficiency class                      | A++  | A+   | A+  |
| Energy consumption annual <sup>1</sup> (kWh) | 385  | 443  | 436   |
| Total net capacity (litres)                  | 592  | 541  | 533   |
| Refrigerator net capacity (litres)           | 375  | 368  | 370   |
| Freezer net capacity (litres)                | 202  | 158  | 157   |
| Climate class                                | SN-T   | SN-T   | SN-T  |
| Noise level (dB [A] re 1pW)                  | 43   | 43   | 43  |
| Additional accessories included              | 2 x ice packs, 1 x egg tray  | 2 x ice pack, 1 x connection hose, 1 x egg tray  | 1 x connection hose, 1 x egg tray           |
| Height of product (mm)                       | 1756   | 1756   | 1770  |
| Width of product (mm)                        | 912  | 912  | 910   |
| Depth of product (mm)                        | 732  | 732  | 720   |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.  
<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C.  
Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

## iQ700 KA92NLB35G

### American fridge freezer Black



Temperature Display: Exterior Digital

### American fridge freezer specifications

| APPLIANCE TYPE                               | iQ500                         | iQ300                                   | iQ300                        |
|--|-------------------------------|---|------------------------------|
| <b>Design family</b>                         | iQ500                         | iQ300                                   | iQ300                        |
| Model number                                 | KA90IV20G                     | KA93NV1FP                               | KA90NV20G                    |
| Availability                                 |                               | FROM SEPTEMBER 2019                     | UNTIL SEPTEMBER 2019         |
| <b>DESIGN FEATURES</b>                       |                               |   |                              |
| Colour of door panels                        | Inox-easyclean                | Stainless steel                         | Inox-easyclean               |
| Colour of sides                              | Grey                          | Grey                                    | Grey                         |
| Style of handle                              | Vertical bar handle           | Vertical bar handle                     | Vertical bar handle          |
| Colour of handle                             | Stainless steel               | Stainless steel                         | Stainless steel              |
| noFrost in fridge and freezer                | ■                             | ■                                       | ■                            |
| Home Connect, Wi-Fi dongle included          | -                             | -                                       | -                            |
| <b>FOOD FRESHNESS SYSTEM</b>                 |                               |   |                              |
| hyperFresh                                   | 2 vegetable drawers on rails  | 1 MultiBox drawer with telescopic rails | 2 vegetable drawers on rails |
| <b>KEY FEATURES – FRIDGE SECTION</b>         |                               |   |                              |
| Product highlights                           | LED                           | LED                                     | LED                          |
| Compressor drive motor                       | -                             | -                                       | -                            |
| superCool                                    | ■                             | ■                                       | ■                            |
| Type of control                              | Electronic                    | Electronic                              | Electronic                   |
| Number of shelves                            | 4                             | 4                                       | 4                            |
| Number of adjustable shelves                 | 0                             | 3                                       | 1                            |
| Shelves for bottles                          | -                             | -                                       | -                            |
| Number of door bins / shelves                | 4                             | 5                                       | 5                            |
| Temperature display                          | Digital                       | Digital                                 | Digital                      |
| Warning signal door open                     | Visual and audible            | Visual and audible                      | Visual and audible           |
| <b>KEY FEATURES – FREEZER SECTION</b>        |                               |   |                              |
| Door opened indicator                        | Visual and audible            | Visual and audible                      | Visual and audible           |
| superFreeze function                         | ■                             | ■                                       | ■                            |
| Temperature adjustable in freezer            | ■                             | ■                                       | ■                            |
| Number of ice cube trays                     | Automatic ice cube maker      | Twist ice box                           | 2 ice cube trays             |
| Ice dispenser features                       | Crushed ice, ice cubes, water | -                                       | -                            |
| Number of freezer drawers                    | 2                             | 2                                       | 2                            |
| <b>ADDITIONAL INFORMATION</b>                |                               |   |                              |
| Energy efficiency class                      | A+                            | A++                                     | A+                           |
| Energy consumption annual <sup>1</sup> (kWh) | 432                           | 363                                     | 475                          |
| Total net capacity (litres)                  | 523                           | 560                                     | 573                          |
| Refrigerator net capacity (litres)           | 360                           | 371                                     | 373                          |
| Freezer net capacity (litres)                | 157                           | 189                                     | 195                          |
| Climate class                                | SN-T                          | SN-T                                    | SN-T                         |
| Noise level (dB [A] re 1pW)                  | 43                            | 42                                      | 44                           |
| Additional accessories included              | 1 x egg tray                  | 1 x egg tray                            | 1 x egg tray                 |
| Height of product (mm)                       | 1770                          | 1786                                    | 1770                         |
| Width of product (mm)                        | 910                           | 908                                     | 910                          |
| Depth of product (mm)                        | 720                           | 685                                     | 720                          |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.  
<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C.  
Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

# noFrost bottom fridge freezers



## iQ 700 K186FHD40

noFrost bottom fridge freezer  
177cm high



### noFrost bottom fridge freezer specifications

| APPLIANCE TYPE                           | NOFROST BOTTOM FRIDGE FREEZER   |
|--|---|
| Design family                            | <b>iQ 700</b>   |
| Model number                             | K186FHD40   |
| <b>DESIGN FEATURES</b>                   |   |
| Fridge / Freezer split                   | 60 / 40   |
| noFrost                                  | ■   |
| lowFrost or Manual defrost               | -   |
| softClose hinge                          | ■   |
| Type of hinge (reversible)               | Fixed hinge   |
| Home Connect                             | Remote Monitoring and Control   |
| <b>FOOD FRESHNESS SYSTEM</b>             |   |
| hyperFresh                               | 2 hyperFresh Premium 0° drawers   |
| <b>KEY FEATURES – FRIDGE SECTION</b>     |   |
| Compressor drive motor                   | -   |
| Light                                    | LED with soft start   |
| superCool                                | ■   |
| Type of control                          | Electronic  |
| Number of shelves                        | 3   |
| Number of adjustable shelves             | 2   |
| Number of door bins / shelves            | 2   |
| Type of shelves                          | Safety glass  |
| Temperature display                      | Digital 7 segment   |
| Warning signal door open                 | Visual and audible  |
| Bottle shelves in fridge                 | -   |
| <b>KEY FEATURES – FREEZER SECTION</b>    |   |
| Door opened indicator                    | Visual and audible  |
| superFreeze function                     | ■   |
| Temperature adjustable in freezer        | ■   |
| Number of ice cube trays                 | 1   |
| Number of freezer drawers                | 3   |
| <b>ADDITIONAL INFORMATION</b>            |   |
| Energy efficiency class                  | A+++  |
| Energy consumption annual (kWh)          | 162   |
| Total net capacity (litres)              | 223   |
| Refrigerator net capacity 4°-8° (litres) | 101   |
| Refrigerator net capacity 0° (litres)    | 55  |
| Freezer net capacity litres              | 67  |
| Climate class                            | SN-T  |
| Noise level (dB [A] re 1pW)              | 38  |
| Additional accessories included          | 2 x ice packs, 3 x egg tray, 1 x ice cube tray with lid, 1 x bottle holder in door tray |
| Height of product (mm)                   | 1772  |
| Width of product (mm)                    | 558   |
| Depth of product (mm)                    | 545   |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located  
<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C  
 Climate zone T = designed to operate in ambient temperature of +18°C to 43°C



### noFrost bottom fridge freezer specifications

| APPLIANCE TYPE                           | NOFROST BOTTOM FRIDGE FREEZER   | NOFROST BOTTOM FRIDGE FREEZER                  | NOFROST BOTTOM FRIDGE FREEZER                  | NOFROST BOTTOM FRIDGE FREEZER                  |
|--|---|--|--|--|
| Design family                            | <b>iQ 700</b>   | <b>iQ 500</b>                                  | <b>iQ 500</b>                                  | <b>iQ 300</b>                                  |
| Model number                             | K186FPF30G  | K185NAD30G                                     | K186NHD30                                      | K186NVF30G                                     |
| <b>DESIGN FEATURES</b>                   |   |  |  |  |
| Fridge / Freezer split                   | 60 / 40   | 50 / 50  | 60 / 40  | 60 / 40  |
| noFrost                                  | ■   | ■  | ■  | ■  |
| lowFrost or Manual defrost               | -   | -  | -  | -  |
| softClose hinge                          | -   | ■  | ■  | -  |
| Type of hinge (reversible)               | Fixed hinge   | Fixed hinge                                    | Fixed hinge                                    | Fixed hinge                                    |
| Home Connect                             | -   | -  | Remote Monitoring and Control                  | -  |
| <b>FOOD FRESHNESS SYSTEM</b>             |   |  |  |  |
| hyperFresh                               | 1 hyperFresh Premium 0° drawer  | 1 hyperFresh Plus drawer                       | 1 hyperFresh Plus drawer                       | 1 hyperFresh vegetable drawer                  |
| <b>KEY FEATURES – FRIDGE SECTION</b>     |   |  |  |  |
| Compressor drive motor                   | -   | ■  | -  | ■  |
| Light                                    | LED   | LED  | LED with Soft Start                            | LED  |
| superCool                                | ■   | ■  | ■  | -  |
| Type of control                          | Electronic  | Electronic                                     | Electronic                                     | Electronic                                     |
| Number of shelves                        | 3   | 4  | 5  | 4  |
| Number of adjustable shelves             | 2   | 3  | 4  | 3  |
| Number of door bins / shelves            | 2   | 3  | 5  | 4  |
| Type of shelves                          | Safety glass  | Safety glass                                   | Safety glass                                   | Safety glass                                   |
| Temperature display                      | Digital 7 segment   | Digital 7 segment                              | Digital 7 segment                              | Digital 7 segment                              |
| Warning signal door open                 | Visual and audible  | Visual and audible                             | Visual and audible                             | No signal                                      |
| Bottle shelves in fridge                 | -   | -  | 1 bottle support grid                          | -  |
| <b>KEY FEATURES – FREEZER SECTION</b>    |   |  |  |  |
| Door opened indicator                    | Visual and audible  | Visual and audible                             | Visual and audible                             | No signal                                      |
| superFreeze function                     | ■   | ■  | ■  | ■  |
| Temperature adjustable in freezer        | ■   | ■  | ■  | -  |
| Number of ice cube trays                 | 1   | 1  | 1  | 1  |
| Number of freezer drawers                | 3   | 4  | 3  | 3  |
| <b>ADDITIONAL INFORMATION</b>            |   |  |  |  |
| Energy efficiency class                  | A++   | A++  | A++  | A++  |
| Energy consumption annual (kWh)          | 232   | 232  | 221  | 222  |
| Total net capacity (litres)              | 223   | 246  | 255  | 255  |
| Refrigerator net capacity 4°-8° (litres) | 101   | 154  | 188  | 188  |
| Refrigerator net capacity 0° (litres)    | 55  | -  | -  | -  |
| Freezer net capacity litres              | 67  | 92   | 67   | 67   |
| Climate class                            | SN-ST   | SN-ST  | SN-ST  | SN-ST  |
| Noise level (dB [A] re 1pW)              | 38  | 39   | 39   | 39   |
| Additional accessories included          | 2 x ice packs, 3 x egg tray, 1 x ice cube tray with lid, 1 x bottle holder in door tray | 2 x ice packs, 2 x egg tray, 1 x ice cube tray | 2 x ice packs, 2 x egg tray, 1 x ice cube tray | 2 x ice packs, 2 x egg tray, 1 x ice cube tray |
| Height of product (mm)                   | 1772  | 1772   | 1772   | 1772   |
| Width of product (mm)                    | 558   | 558  | 558  | 541  |
| Depth of product (mm)                    | 545   | 545  | 545  | 545  |

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located  
<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C  
 Climate zone T = designed to operate in ambient temperature of +18°C to 43°C

# lowFrost bottom fridge freezers

## iQ 700 K187FPF30

lowFrost bottom fridge freezer  
177cm high



2  
Year Warranty

lowFrost bottom  
fridge freezer  
specifications

| APPLIANCE TYPE                           | LOWFROST BOTTOM FRIDGE FREEZER  | LOWFROST BOTTOM FRIDGE FREEZER  | LOWFROST BOTTOM FRIDGE FREEZER                 |
|--|---|---|--|
| Design family                            | iQ 700  | iQ 700  | iQ 500   |
| Model number                             | K187FPF30   | K184FPF30   | K187SAF30G                                     |
| <b>DESIGN FEATURES</b>                   |   |   |  |
| Fridge / Freezer split                   | 70 / 30   | 60 / 40   | 70 / 30  |
| noFrost                                  | –   | –   | –  |
| lowFrost or Manual defrost               | lowFrost  | lowFrost  | lowFrost                                       |
| softClose hinge                          | –   | –   | –  |
| Type of hinge (reversible)               | Fixed hinge   | Fixed hinge   | Fixed hinge                                    |
| Home Connect                             | –   | –   | –  |
| <b>FOOD FRESHNESS SYSTEM</b>             |   |   |  |
| hyperFresh                               | 1 hyperFresh Premium 0° drawer  | 1 hyperFresh Premium 0° drawer  | 1 hyperFresh Plus drawer                       |
| <b>KEY FEATURES – FRIDGE SECTION</b>     |   |   |  |
| Compressor drive motor                   | –   | –   | ■  |
| Light                                    | LED   | LED   | LED  |
| superCool                                | ■   | ■   | ■  |
| Type of control                          | Electronic  | Electronic  | Electronic                                     |
| Number of shelves                        | 4   | 3   | 5  |
| Number of adjustable shelves             | 3   | 2   | 4  |
| Number of door bins / shelves            | 3   | 2   | 5  |
| Type of shelves                          | Safety glass  | Safety glass  | Safety glass                                   |
| Temperature display                      | Digital 7 segment   | Digital 7 segment   | Digital 7 segment                              |
| Warning signal door open                 | Visual and audible  | Visual and audible  | Visual and audible                             |
| Bottle shelves in fridge                 | –   | –   | –  |
| <b>KEY FEATURES – FREEZER SECTION</b>    |   |   |  |
| Door opened indicator                    | Visual and audible  | Visual and audible  | Visual and audible                             |
| superFreeze function                     | ■   | ■   | ■  |
| Temperature adjustable in freezer        | ■   | ■   | ■  |
| Number of ice cube trays                 | 1   | 1   | 1  |
| Number of freezer drawers                | 2   | 3   | 2  |
| <b>ADDITIONAL INFORMATION</b>            |   |   |  |
| Energy efficiency class                  | A++   | A++   | A++  |
| Energy consumption annual (kWh)          | 225   | 159   | 225  |
| Total net capacity (litres)              | 235   | 230   | 270  |
| Refrigerator net capacity 4°-8° (litres) | 118   | 101   | 209  |
| Refrigerator net capacity 0° (litres)    | 55  | 55  | –  |
| Freezer net capacity litres              | 62  | 74  | 61   |
| Climate class                            | SN-ST   | SN-T  | SN-T   |
| Noise level (dB [A] re 1pW)              | 37  | 36  | 36   |
| Additional accessories included          | 2 x ice packs, 3 x egg tray, 1 x ice cube tray with lid, 1 x bottle holder in door tray | 2 x ice packs, 3 x egg tray, 1 x ice cube tray with lid, 1 x bottle holder in door tray | 2 x ice packs, 2 x egg tray, 1 x ice cube tray |
| Height of product (mm)                   | 1772  | 1772  | 1772   |
| Width of product (mm)                    | 558   | 558   | 558  |
| Depth of product (mm)                    | 545   | 545   | 545  |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located  
<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C  
 Climate zone T = designed to operate in ambient temperature of +18°C to 43°C

lowFrost bottom  
fridge freezer  
specifications



| APPLIANCE TYPE                           | LOWFROST BOTTOM FRIDGE FREEZER                 | STATIC FRIDGE FREEZER     |
|--|--|--|--|--|--|---------------------------|
| Design family                            | iQ 500   | iQ 300   | iQ 300   | iQ 300   | iQ 300   | iQ 100                    |
| Model number                             | K186SAF30G                                     | K186VVF30G                                     | K187VVF30G                                     | K187VVS30G                                     | K185VVF30G                                     | K138VX22GB                |
| <b>DESIGN FEATURES</b>                   |  |  |  |  |  |                           |
| Fridge / Freezer split                   | 60 / 40  | 60 / 40  | 70 / 30  | 70 / 30  | 50 / 50  | 70 / 30                   |
| noFrost                                  | –  | –  | –  | –  | –  | –                         |
| lowFrost or Manual defrost               | lowFrost                                       | lowFrost                                       | lowFrost                                       | lowFrost                                       | lowFrost                                       | Manual                    |
| softClose hinge                          | –  | –  | –  | –  | –  | –                         |
| Type of hinge (reversible)               | Fixed hinge                                    | Fixed hinge                                    | Fixed hinge                                    | Sliding hinge                                  | Fixed hinge                                    | Sliding hinge             |
| Home Connect                             | –  | –  | –  | –  | –  | –                         |
| <b>FOOD FRESHNESS SYSTEM</b>             |  |  |  |  |  |                           |
| hyperFresh                               | 1 hyperFresh Plus drawer                       | 1 hyperFresh vegetable drawer                  | 1 hyperFresh vegetable drawer                  | 1 hyperFresh vegetable drawer                  | 1 hyperFresh vegetable drawer                  | 1 vegetable drawer        |
| <b>KEY FEATURES – FRIDGE SECTION</b>     |  |  |  |  |  |                           |
| Compressor drive motor                   | ■  | ■  | ■  | ■  | ■  | –                         |
| Light                                    | LED  | LED  | LED  | LED  | LED  | LED                       |
| superCool                                | ■  | –  | –  | –  | –  | –                         |
| Type of control                          | Electronic                                     | Electronic                                     | Electronic                                     | Electronic                                     | Electronic                                     | Electronic                |
| Number of shelves                        | 5  | 4  | 5  | 5  | 4  | 5                         |
| Number of adjustable shelves             | 4  | 3  | 4  | 4  | 3  | 4                         |
| Number of door bins / shelves            | 5  | 4  | 5  | 5  | 4  | –                         |
| Type of shelves                          | Safety glass                                   | Safety glass              |
| Temperature display                      | Digital 7 segment                              | Digital LED                                    | Digital LED                                    | Digital LED                                    | Digital LED                                    | No temperature indication |
| Warning signal door open                 | Visual and audible                             | No signal                                      | No signal                                      | No signal                                      | No signal                                      | No signal                 |
| Bottle shelves in fridge                 | –  | –  | –  | –  | –  | –                         |
| <b>KEY FEATURES – FREEZER SECTION</b>    |  |  |  |  |  |                           |
| Door opened indicator                    | Visual and audible                             | No signal                                      | No signal                                      | No signal                                      | No signal                                      | No signal                 |
| superFreeze function                     | ■  | ■  | ■  | ■  | ■  | –                         |
| Temperature adjustable in freezer        | ■  | –  | –  | –  | –  | –                         |
| Number of ice cube trays                 | 1  | 1  | 1  | 1  | 1  | –                         |
| Number of freezer drawers                | 3  | 3  | 2  | 2  | 4  | 3                         |
| <b>ADDITIONAL INFORMATION</b>            |  |  |  |  |  |                           |
| Energy efficiency class                  | A++  | A++  | A++  | A++  | A++  | A+                        |
| Energy consumption annual (kWh)          | 218  | 231  | 227  | 227  | 239  | 275                       |
| Total net capacity (litres)              | 265  | 267  | 272  | 272  | 259  | 276                       |
| Refrigerator net capacity 4°-8° (litres) | 191  | 191  | 209  | 209  | 157  | 217                       |
| Refrigerator net capacity 0° (litres)    | –  | –  | –  | –  | –  | –                         |
| Freezer net capacity litres              | 74   | 76   | 63   | 63   | 102  | 59                        |
| Climate class                            | SN-ST  | SN-T   | SN-T   | SN-T   | SN-T   | SN-ST                     |
| Noise level (dB [A] re 1pW)              | 36   | 38   | 38   | 38   | 38   | 40                        |
| Additional accessories included          | 2 x ice packs, 2 x egg tray, 1 x ice cube tray | 2 x ice packs, 2 x egg tray, 1 x ice cube tray | 2 x ice packs, 2 x egg tray, 1 x ice cube tray | 2 x ice packs, 2 x egg tray, 1 x ice cube tray | 2 x ice packs, 2 x egg tray, 1 x ice cube tray | –                         |
| Height of product (mm)                   | 1772   | 1772   | 1772   | 1772   | 1772   | 1772                      |
| Width of product (mm)                    | 558  | 541  | 541  | 541  | 541  | 541                       |
| Depth of product (mm)                    | 545  | 545  | 545  | 545  | 545  | 545                       |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located  
<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C  
 Climate zone T = designed to operate in ambient temperature of +18°C to 43°C

# Single door fridges



## iQ 700 KI81FHD40

studioLine

Single door fridge  
177cm high



2  
Year Warranty

### Single door fridge specifications

| APPLIANCE TYPE                                   | FRIDGE 177CM                                    |
|--|---|
| Design family                                    | iQ 700  |
| Model number                                     | KI81FHD40                                       |
| <b>DESIGN FEATURES</b>                           |   |
| noFrost  | -   |
| lowFrost or Manual defrost                       | -   |
| softClose hinge                                  | ■   |
| Type of hinge (reversible)                       | Fixed hinge                                     |
| Home Connect                                     | ■   |
| <b>FOOD FRESHNESS SYSTEM</b>                     |   |
| hyperFresh                                       | 3 hyperFresh Premium 0° drawers                 |
| <b>KEY FEATURES – FRIDGE SECTION</b>             |   |
| Compressor drive motor                           | -   |
| Light  | LED   |
| superCool  | ■   |
| Type of control                                  | 1 x 7 segment                                   |
| Number of shelves                                | 7   |
| Number of adjustable shelves                     | 6   |
| Number of door bins / shelves                    | 7   |
| Type of shelves                                  | Glass   |
| Temperature display                              | Digital   |
| Warning signal door open                         | ■   |
| Defrost system in fridge                         | Automatic                                       |
| Bottle shelves in fridge                         | -   |
| <b>KEY FEATURES – FREEZER SECTION</b>            |   |
| Light in freezer                                 | -   |
| Warning signal door open                         | -   |
| superFreeze function                             | -   |
| Temperature adjustable in freezer                | -   |
| Number of ice cube trays                         | -   |
| Number of freezing flaps                         | -   |
| Number of freezer drawers                        | -   |
| <b>ADDITIONAL INFORMATION</b>                    |   |
| Energy efficiency class                          | A+++  |
| Energy consumption annual (kWh)                  | 87  |
| Total net capacity including 0° drawers (litres) | 289   |
| Refrigerator net capacity 0° (litres)            | 83  |
| Freezer net capacity (litres)                    | -   |
| Climate class                                    | SN-T  |
| Noise level (dB [A] re 1pW)                      | 36  |
| Additional accessories included                  | 3 x egg tray,<br>1 x bottle holder in door tray |
| Height of product (mm)                           | 1772  |
| Width of product (mm)                            | 558   |
| Depth of product (mm)                            | 545   |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located

<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C  
Climate zone T = designed to operate in ambient temperature of +18°C to 43°C



### Single door fridge specifications

| APPLIANCE TYPE                                   | FRIDGE 177CM                                    | FRIDGE 177CM  | FRIDGE 177CM  | FRIDGE 177CM  | FRIDGE 177CM                   |
|--|---|---|---|---|--------------------------------|
| Design family                                    | iQ 700  | iQ 500  | iQ 500  | iQ 500  | iQ 300                         |
| Model number                                     | KI81FPF30G                                      | KI81RAD30   | KI81RAF30G  | KI82LAF30   | KI81RV530G                     |
| <b>DESIGN FEATURES</b>                           |   |   |   |   |                                |
| noFrost  | -   | -   | -   | -   | -                              |
| lowFrost or Manual defrost                       | -   | -   | -   | -   | -                              |
| softClose hinge                                  | -   | ■   | -   | -   | -                              |
| Type of hinge (reversible)                       | Fixed hinge                                     | Fixed hinge   | Fixed hinge   | Fixed hinge   | Sliding hinge                  |
| Home Connect                                     | -   | -   | -   | -   | -                              |
| <b>FOOD FRESHNESS SYSTEM</b>                     |   |   |   |   |                                |
| hyperFresh                                       | 3 hyperFresh Premium 0° drawers                 | 2 hyperFresh vegetable drawers, 1 with telescopic rails | 2 hyperFresh vegetable drawers, 1 with telescopic rails | 2 hyperFresh vegetable drawers, 1 with telescopic rails | 2 hyperFresh vegetable drawers |
| <b>KEY FEATURES – FRIDGE SECTION</b>             |   |   |   |   |                                |
| Compressor drive motor                           | -   | ■   | ■   | ■   | ■                              |
| Light  | LED   | LED   | LED   | LED   | LED                            |
| superCool  | ■   | ■   | ■   | ■   | ■                              |
| Type of control                                  | 1 x 7 segment                                   | 1 x 7 segment   | 1 x 7 segment   | 1 x 7 segment   | 1 x LED chain                  |
| Number of shelves                                | 7   | 7   | 7   | 5   | 7                              |
| Number of adjustable shelves                     | 6   | 6   | 6   | 4   | 6                              |
| Number of door bins / shelves                    | 7   | 7   | 7   | 5   | 7                              |
| Type of shelves                                  | Glass   | Glass   | Glass   | Glass   | Glass                          |
| Temperature display                              | Digital   | Digital   | Digital   | Digital   | Digital                        |
| Warning signal door open                         | ■   | ■   | ■   | ■   | -                              |
| Defrost system in fridge                         | Automatic                                       | Automatic   | Automatic   | Automatic   | Automatic                      |
| Bottle shelves in fridge                         | -   | 1 bottle support grid                                   | 1 bottle support grid                                   | -   | -                              |
| <b>KEY FEATURES – FREEZER SECTION</b>            |   |   |   |   |                                |
| Light in freezer                                 | -   | -   | -   | -   | -                              |
| Warning signal door open                         | -   | -   | -   | ■   | -                              |
| superFreeze function                             | -   | -   | -   | -   | -                              |
| Temperature adjustable in freezer                | -   | -   | -   | -   | -                              |
| Number of ice cube trays                         | -   | -   | -   | 1 ice cube tray   | -                              |
| Number of freezing flaps                         | -   | -   | -   | -   | -                              |
| Number of freezer drawers                        | -   | -   | -   | -   | -                              |
| <b>ADDITIONAL INFORMATION</b>                    |   |   |   |   |                                |
| Energy efficiency class                          | A++   | A++   | A++   | A++   | A++                            |
| Energy consumption annual (kWh)                  | 131   | 116   | 116   | 209   | 116                            |
| Total net capacity including 0° drawers (litres) | 289   | 319   | 319   | 286   | 319                            |
| Refrigerator net capacity 0° (litres)            | 83  | -   | -   | -   | -                              |
| Freezer net capacity (litres)                    | -   | -   | -   | 34  | -                              |
| Climate class                                    | SN-T  | SN-T  | SN-T  | SN-ST   | SN-T                           |
| Noise level (dB [A] re 1pW)                      | 37  | 37  | 37  | 36  | 37                             |
| Additional accessories included                  | 3 x egg tray,<br>1 x bottle holder in door tray | 2 x egg tray  | 2 x egg tray  | 2 x egg tray,<br>1 x ice cube tray                      | 2 x egg tray                   |
| Height of product (mm)                           | 1772  | 1772  | 1772  | 1772  | 1772                           |
| Width of product (mm)                            | 558   | 558   | 558   | 558   | 541                            |
| Depth of product (mm)                            | 545   | 545   | 545   | 545   | 545                            |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located

<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C  
Climate zone T = designed to operate in ambient temperature of +18°C to 43°C

# Single door fridges and freezers

## IQ 500 GI81NAE30G

Single door freezer  
177cm high



2  
Year Warranty

Single door fridges and freezer specifications

| APPLIANCE TYPE                                   | FREEZER 177CM      | FRIDGE 140CM                  |
|--|--------------------|-------------------------------|
| Design family                                    | IQ 500             | IQ 500                        |
| Model number                                     | GI81NAE30G         | KI51RAF30G                    |
| <b>DESIGN FEATURES</b>                           |                    |                               |
| noFrost  | ■                  | -                             |
| lowFrost or Manual defrost                       | -                  | -                             |
| softClose hinge                                  | -                  | -                             |
| Type of hinge (reversible)                       | Fixed hinge        | Fixed hinge                   |
| Home Connect                                     | -                  | -                             |
| <b>FOOD FRESHNESS SYSTEM</b>                     |                    |                               |
| hyperFresh                                       | -                  | 1 hyperFresh vegetable drawer |
| <b>KEY FEATURES – FRIDGE SECTION</b>             |                    |                               |
| Compressor drive motor                           | -                  | ■                             |
| Light  | -                  | LED                           |
| superCool  | -                  | ■                             |
| Type of control                                  | -                  | 1 x 7 segment                 |
| Number of shelves                                | -                  | 6                             |
| Number of adjustable shelves                     | -                  | 5                             |
| Number of door bins / shelves                    | -                  | 6                             |
| Type of shelves                                  | -                  | Glass                         |
| Temperature display                              | -                  | Digital                       |
| Warning signal door open                         | -                  | ■                             |
| Defrost system in fridge                         | -                  | Automatic                     |
| Bottle shelves in fridge                         | -                  | -                             |
| <b>KEY FEATURES – FREEZER SECTION</b>            |                    |                               |
| Light in freezer                                 | -                  | -                             |
| Warning signal door open                         | Visual and audible | -                             |
| superFreeze function                             | ■                  | -                             |
| Temperature adjustable in freezer                | ■                  | -                             |
| Number of ice cube trays                         | 2                  | -                             |
| Number of freezing flaps                         | 2                  | -                             |
| Number of freezer drawers                        | 5                  | -                             |
| <b>ADDITIONAL INFORMATION</b>                    |                    |                               |
| Energy efficiency class                          | A++                | A++                           |
| Energy consumption annual (kWh)                  | 243                | 109                           |
| Total net capacity including 0° drawers (litres) | 211                | 247                           |
| Refrigerator net capacity 0° (litres)            | -                  | -                             |
| Freezer net capacity (litres)                    | 211                | -                             |
| Climate class                                    | SN-T               | SN-T                          |
| Noise level (dB [A] re 1pW)                      | 36                 | 33                            |
| Additional accessories included                  | 2 small ice packs  | 2 x egg tray                  |
| Height of product (mm)                           | 1772               | 1397                          |
| Width of product (mm)                            | 558                | 558                           |
| Depth of product (mm)                            | 545                | 545                           |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located

<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C  
Climate zone T = designed to operate in ambient temperature of +18°C to 43°C

Single door fridges and freezer specifications



| APPLIANCE TYPE                                   | FRIDGE 122CM                  | FRIDGE 122CM                  | BUILT-UNDER FRIDGE 82CM            | BUILT-UNDER FRIDGE 82CM        | BUILT-UNDER 82CM FREEZER |
|--|-------------------------------|-------------------------------|------------------------------------|--------------------------------|--------------------------|
| Design family                                    | IQ 500                        | IQ 500                        | IQ 500                             | IQ 500                         | IQ 500                   |
| Model number                                     | KI41RAD30                     | KI41RAF30G                    | KU15LA60GB                         | KU15RA51GB                     | GU15DA50GB               |
| <b>DESIGN FEATURES</b>                           |                               |                               |                                    |                                |                          |
| noFrost  | -                             | -                             | -                                  | -                              | -                        |
| lowFrost or Manual defrost                       | -                             | -                             | -                                  | -                              | -                        |
| softClose hinge                                  | ■                             | -                             | -                                  | -                              | ■                        |
| Type of hinge (reversible)                       | Fixed hinge                   | Fixed hinge                   | Fixed hinge                        | Fixed hinge                    | Fixed hinge              |
| Home Connect                                     | -                             | -                             | -                                  | -                              | -                        |
| <b>FOOD FRESHNESS SYSTEM</b>                     |                               |                               |                                    |                                |                          |
| hyperFresh                                       | 1 hyperFresh vegetable drawer | 1 hyperFresh vegetable drawer | 2 hyperFresh vegetable drawers     | 2 hyperFresh vegetable drawers | -                        |
| <b>KEY FEATURES – FRIDGE SECTION</b>             |                               |                               |                                    |                                |                          |
| Compressor drive motor                           | ■                             | ■                             | -                                  | -                              | -                        |
| Light  | LED                           | LED                           | 1x25 watt                          | 1x25 watt                      | -                        |
| superCool  | ■                             | ■                             | -                                  | -                              | -                        |
| Type of control                                  | 1 x 7 segment                 | 1 x 7 segment                 | non (mechanical)                   | non (mechanical)               | -                        |
| Number of shelves                                | 6                             | 6                             | 2                                  | 3                              | -                        |
| Number of adjustable shelves                     | 5                             | 5                             | 1                                  | 3                              | -                        |
| Number of door bins / shelves                    | 6                             | 6                             | 2                                  | 3                              | -                        |
| Type of shelves                                  | Glass                         | Glass                         | Glass                              | Glass                          | -                        |
| Temperature display                              | Digital                       | Digital                       | -                                  | -                              | -                        |
| Warning signal door open                         | ■                             | ■                             | -                                  | -                              | -                        |
| Defrost system in fridge                         | Automatic                     | Automatic                     | Automatic                          | Automatic                      | -                        |
| Bottle shelves in fridge                         | -                             | -                             | -                                  | -                              | -                        |
| <b>KEY FEATURES – FREEZER SECTION</b>            |                               |                               |                                    |                                |                          |
| Light in freezer                                 | -                             | -                             | -                                  | -                              | -                        |
| Warning signal door open                         | ■                             | ■                             | -                                  | -                              | visual and audible       |
| superFreeze function                             | -                             | -                             | -                                  | -                              | ■                        |
| Temperature adjustable in freezer                | -                             | -                             | -                                  | -                              | ■                        |
| Number of ice cube trays                         | -                             | -                             | 1 ice cube tray                    | -                              | -                        |
| Number of freezing flaps                         | -                             | -                             | -                                  | -                              | -                        |
| Number of freezer drawers                        | -                             | -                             | -                                  | -                              | 3                        |
| <b>ADDITIONAL INFORMATION</b>                    |                               |                               |                                    |                                |                          |
| Energy efficiency class                          | A++                           | A++                           | A++                                | A+                             | A+                       |
| Energy consumption annual (kWh)                  | 105                           | 105                           | 140                                | 118                            | 184                      |
| Total net capacity including 0° drawers (litres) | 211                           | 211                           | 123                                | 137                            | 98                       |
| Refrigerator net capacity 0° (litres)            | -                             | -                             | -                                  | -                              | -                        |
| Freezer net capacity (litres)                    | -                             | -                             | 15 l                               | -                              | 98                       |
| Climate class                                    | SN-T                          | SN-T                          | SN-ST                              | SN-ST                          | SN-ST                    |
| Noise level (dB [A] re 1pW)                      | 33                            | 33                            | 38                                 | 38                             | 38                       |
| Additional accessories included                  | 2 x egg tray                  | 2 x egg tray                  | 1 x egg tray,<br>1 x ice cube tray | 1 x egg tray                   | 2 small ice packs        |
| Height of product (mm)                           | 1221                          | 1221                          | 820                                | 820                            | 820                      |
| Width of product (mm)                            | 558                           | 558                           | 598                                | 598                            | 598                      |
| Depth of product (mm)                            | 545                           | 545                           | 548                                | 548                            | 548                      |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located

<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C  
Climate zone T = designed to operate in ambient temperature of +18°C to 43°C

# Dishwashers. Innovative features for sparkling results.

Siemens dishwashers feature modern design and innovative ideas for seamless living.

Experience maximum flexibility with practical innovations such as varioSpeed Plus which washes your dishes on selected programmes up to 66% faster and Zeolith® drying technology that transforms humidity into heat for gentle and effective drying results.

Our dishwashers include height-adjustable baskets and foldable racks, stylish innovations such as door openAssist and timeLight floor projection, all working together to provide you with the perfect balance between modern design and innovative technology. Whether you are serving dinner for family or hosting a party for friends, Siemens dishwashers ensure that you'll have sparkling clean dishes and glasses quickly.

Siemens dishwasher warranties:

**2**  
Year Warranty  
**2 Year Warranty**  
A Two Year Warranty is available as on all Siemens dishwashers listed in this brochure to protect against manufacturing and materials faults during this warranty period.

**10**  
Year Warranty  
**Anti-Rust**  
**10 Year Anti-Rust Warranty**  
All Siemens dishwashers purchased from the 1st January 2012 onwards have a 10 Year Anti-Rust Warranty to protect against rust in the inner cavity of the appliance.

**Lifetime**  
Warranty  
**AquaStop**  
**Lifetime AquaStop Warranty**  
All Siemens dishwashers listed in this brochure have a lifetime AquaStop warranty to protect against water damage caused by a defective AquaStop system.

To find out more about your warranty and for registration please refer to page 179.

Model shown: **SN878D26PE** studioLine fully integrated dishwasher



Your daily forecast,  
dry conditions,  
brilliant views.



Model shown: SN678D06TG fully integrated dishwasher

## Welcome to a new era of dishwashing with brilliantShine.



Our brilliantShine system combines our low temperature glass care programme with our advanced water softening technology and Zeolith® drying to ensure your glassware is taken care of. Straight from dishwasher to table, Shine&Dry gives you streak-free, shining glasses. Harnessing the power of Zeolith® at its best, the special drying cycle also works just as well on plastics, pots and pans. Saving you time, you no longer need to give glasses an extra towel dry to smarten them up, allowing you to spend more time preparing for your guests arrival. With the brilliantShine system your glassware is always ready to shine for your guests, even unexpected ones.

That's what the new brilliantShine system with Zeolith® Drying is made for: creating the perfect conditions to start every day with a highlight, and sparkling glasses that you can be proud of.

The new brilliantShine system offers three intelligent solutions that take care of these factors:

- Zeolith® drying uses a Zeolite mineral that absorbs moisture and converts it into a gentle heat.
- The Shine&Dry option swills all residues of detergent with extra rinsing water, resulting in streak free, shining glassware.
- The Glass 40°C programme ensures that your glassware is not exposed to excessive temperatures or spray pressures, and keeps the cycle time shorter.

## Zeolith®: Super efficient drying technology.



Using advanced drying technologies Siemens dishwashers keep energy consumption to a minimum. Zeolith®, a form of zeolite mineral has the astonishing ability to absorb moisture and convert it to heat. What does this mean for you? The heat produced naturally by the Zeolith® is used for the drying cycle. No additional energy is therefore required to heat up the contents of your dishwasher for the drying process (as with a standard drying system). This results in perfect drying, with less energy usage than models without Zeolith® technology.

Zeolith® is stored in the depths of the dishwasher; this regenerates itself and keeps working for the lifetime of the machine meaning you never have to replace it! Combine this with the economy 50°C programme to get brilliant results with minimal energy.

### Drying phase

Zeolith® absorbs moisture and converts it to heat energy.

### Cleaning phase

As the mineral is heated during the cleaning cycle, it is recharged and ready to absorb moisture once more.



## Take your mind off the household chores using the Home Connect App.

Connect your Wi-Fi-ready dishwasher with the Home Connect App to easily select programmes and options to start your dishwasher from wherever you are, whenever you want. Thanks to this app technology, you can control your appliance out of home and have the dishes ready exactly when you need them. Perfect for busy lifestyles. When the cycle is finished, the Home Connect App will send you a push notification to let you know, so you can focus on other things.

### easyStart menu

The easyStart menu on the Home Connect App helps you to find the correct setting for your load quickly and easily. Just answer a few simple questions and the app will suggest the most optimum programme for your load. It's easy to adjust your dishwasher settings via the app on your mobile or tablet to keep it running at maximum efficiency.

### Home Connect partner Services

You can even use our partner services, Amazon Alexa, Amazon Dash Replenishment and IFTTT to manage your machine. With Amazon Alexa, you can control your appliance through voice



control. Whether you want to start or finish the cycle, or check the remaining cycle time, just ask Alexa.

The integrated Tab Counter can be linked to Amazon Dash Replenishment to offer even more convenience. The app will monitor the amount of tablets you have left, will notify you when you are running low and allow you to order more through the app, through the Amazon shop. That's one less item on the shopping list to think about.

IFTTT technology allows you to integrate the Home Connect App with a wider array of connect devices. You can then produce customised applets, demands between two devices, so you can really bring your smart home to life. For example you could make your lights flash when your cycle finishes.

Learn more about Home Connect by visiting the Home Connect page on the Siemens Home UK website: [www.siemens-home.bsh-group.com/uk](http://www.siemens-home.bsh-group.com/uk)

# Discover top of the range TFT Displays and seamlessly fitted varioHinge options.

## Choose the display type that is right for you.

### Black touch control with TFT display and real-time clock

The clear, touch control high resolution TFT display makes it easy to select programmes and settings and check the status of your dishwasher at a glance. Thanks to the real-time clock, it's now possible to set the exact time that you want your dishes to be ready by, for extra convenience. Perfect for delivering warm plates to the dinner table.



Model shown: SN878D26PE studioLine fully integrated dishwasher

### Black touch control with LED display

Retaining the same top of the range sleek black touch control panel, however with a clear LED display screen which displays the programme setting and duration time.



Model shown: SN658D00MG fully integrated dishwasher

### Stainless steel push button control panel with LED display

This sleek design includes stainless steel buttons and a clear LED screen which displays the programme setting and duration time.



Model shown: SN736X03ME fully integrated extra height 86.5cm dishwasher

### Black push button control panel with LED display

With black buttons and an LED screen which displays programme settings and duration time, this easy to use interface is practical and stylish.




Model shown: SN636X00KG fully integrated dishwasher


## varioHinge. The ideal solution for extra long cabinet doors.

varioHinge enables the furniture panel to slide up the appliance door as it opens, avoiding collision with the plinth.

Siemens has two built-in dishwasher models, SN736X03ME and SX736X03ME with varioHinge. varioHinge ensures your kitchen design can be completely flexible with the installation of your dishwasher. Perfect for cabinet doors in handleless kitchens, or designs with low baseboards and longer cabinet panels, the varioHinge allows the cabinet door to be pushed upwards when opened to avoid the door catching. The varioHinge reduces the bottom gap between cabinet doors too for a seamless finish to your kitchen. These appliances are suitable for use with a 50mm plinth.

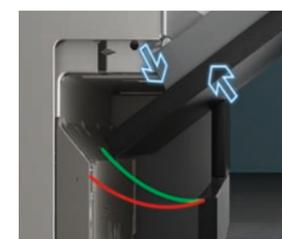

- ✓ Attractive design for high installation thanks to minimal gap size made possible by varioHinge.
- ✓ With the variable hinge varioHinge, a lower plinth height is possible.

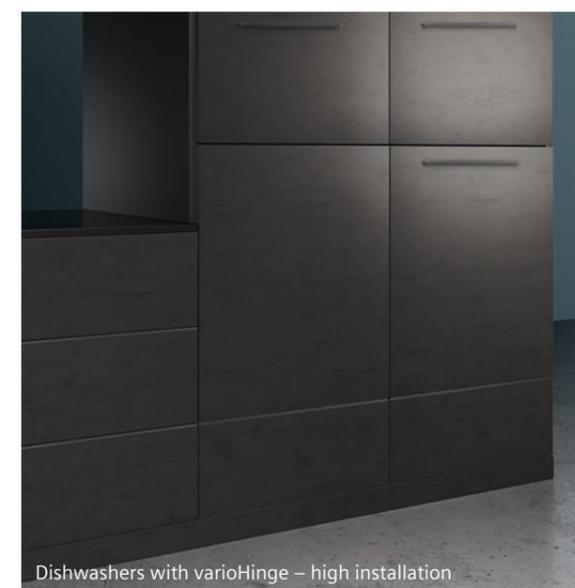

Dishwashers with varioHinge – high installation

5cm

# Key features in dishcare.



Model shown: SN678D06TG fully integrated dishwasher with blue emotionLight

## Storage solutions for added flexibility and better results.



### varioDrawer

By adding a third shelf for cutlery, varioDrawer removes the need for a cutlery basket and creates more space. Also available in varioDrawer Pro for added flexibility.



### varioDrawer Pro

The varioDrawer Pro adds a third shelf for cutlery and removes the need for a cutlery basket, creating more space. Knives, forks and spoons are placed on their side, leaving them easier to remove when emptying the dishwasher.

With the varioDrawer Pro flexible sides can fold down to take items such as espresso cups, and areas in the tray can be adjusted to allow for larger handle cutlery.

Convenient blue touchpoints also indicate all the adjustment options available, such as lowering the side sections to accommodate bulkier items like espresso cups and ladles.



### varioFlex basket system

The ability to fold down certain compartments within the cavity for extra room and flexibility. The top rack has 2 areas that can be adjusted for extra flexibility whilst the bottom basket has 4 areas that can be adjusted to create more space.



### varioFlex Pro basket system

The varioFlex Pro basket system is designed to hold larger plates and allows you to create extra space for pots and pans with ease. Choose from up to 6 flexible areas in the top rack and up to 8 flexible areas in the bottom basket to create extra space. Blue touchpoints inside the baskets indicate all the adjustment options available at a glance. It's never been as easy to adjust the slats to suit each load, making the inside of your dishwasher constantly adaptable.



### rackMatic™

Available across all storage solutions, this feature conveniently allows the user to raise and lower the height of the top basket to create more or less space, even when the dishwasher is loaded.



varioDrawer



varioDrawer Pro



varioFlex basket



varioFlex Pro basket

## Floor projection displays.



### infoLight

Projects a beam of light onto the floor to show the dishwasher is running. This prevents needing to open the door while the cycle is still on to see if it's finished.




### timeLight

Check the status of the cycle easily. Useable on any surface of any colour, the innovative timeLight projects the remaining time as well as other essential information of the dishwasher cycle onto the floor. With quiet dishwashers, this solution lets you know the dishwasher is running and how long is left at a glance, so you can avoid opening the door mid-cycle.



infoLight

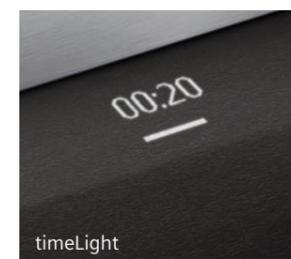

timeLight

## Light up your dishwasher.



### emotionLight

Siemens dishwashers feature an internal blue emotionLight that has the wow-factor. Creating a relaxed ambiance, the emotionLight uses LED lights to reflect off your brilliantly-cleaned glasses and create a cool blue glow emanating from inside your dishwasher when you open the door, and switching off again when you close it.



## Added kitchen convenience.



### Energy efficiency

All Siemens built-in dishwashers are rated between an A+ or A+++ for efficiency.



### Silence programme

You'll barely hear our dishwashers running. When the Silence programme is selected the dishwashers noise level is reduced by 2 – 3dB so you can relax in peace. This is achieved by decreasing water pressure and extending run time. Values stated in matrix under noise level.



### Hygiene Plus

Great for cleaning chopping boards, food containers and utensils, the hygiene option kills bacteria and germs. Providing a simple solution to the upkeep of your family's health, the final rinse heats up to 70°C regardless of the cycle you choose.\*


\*Not on delicate programme.



### Water consumption

Our built-in dishwashers' lowest water usage programme is 6.5L per cycle\* if the Eco 50 programme is selected, for the most resource efficient option.

\*Based on SN658D01MG

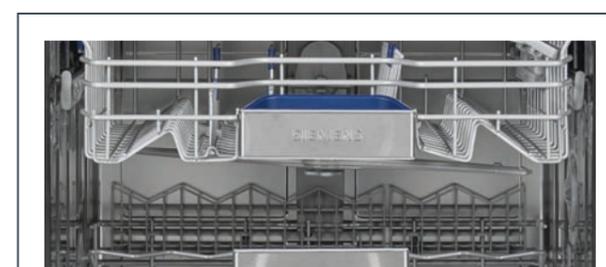

**Machine Care with Siemens dishwashers**  
For excellent results when washing and drying, it is important to look after your dishwasher correctly. All of our integrated Siemens dishwashers include the Machine Care Programme. This is designed to be used together with a dishwasher cleaning detergent and provides a short, high temperature, high pressure wash designed to remove limescale and grease build up inside your dishwasher and outlet pipes. With iQ700 and iQ500 the dishwasher will remind you every 30 cycles or so to run this programme, to keep your appliance running as efficiently as possible.



Model shown: SN678D06TG fully integrated dishwasher

## Features available on all dishwasher models.



**varioSpeed Plus**  
Use the varioSpeed Plus button to run the dishwasher significantly faster without compromising on wash quality. Standard on all models.



**dosageAssist**  
Quickly and evenly dissolves dishwasher tablets throughout the entire machine, leaving no mess to clean at the end of the cycle. This also prevents the tablet getting stuck in your dishware ensuring no cleaning product residue is left after the cycle.



**extraDry**  
The "extraDry" option can be added to any programme and will extend the drying cycle. This can be useful for harder to dry loads.



**intensiveZone**  
Delicate items and pots and pans can be cleaned together in the same wash. The intensiveZone option increases the spray pressure and temperature in the bottom basket to handle burnt on pans, whilst delicate items can be washed safely in the top basket.



**hydroSensor**  
Makes sure that the optimum temperature is used depending on how dirty the dishes are, meaning that dishes are perfectly clean the first time round.



**Heat exchanger**  
Protect your glasses from cracking with gentle water heating. Heat generated during the wash cycle is used to pre-heat the rinsing water to stop glasses being put under stress. Standard on all models.



**loadSensor**  
By monitoring that the optimum amount of water is flowing through the dishwasher throughout the cycle, loadSensor helps to ensure that dishes are cleaned thoroughly.



## A modern handleless kitchen.



**openAssist**  
With door openAssist you can open fully integrated dishwashers by simply touching the front of the unit, making loading and unloading easy. This removes the need for a handle and is the ideal choice for designer kitchens. With this feature you can even implement a child lock so that the appliance requires two gentle touches before opening.



**Wine glass holder**  
This accessory holds up to four long-stemmed glasses safely and securely. The innovative lock mechanism ensures glasses are stable in the basket, yet with minimal contact areas to avoid any water pooling or streaks.



Wine glass holder



Model shown: SN658D02MG fully integrated dishwasher

# Introducing the next level of dishwashing: studioLine.

studioLine

## Speed, performance and efficiency built-in: studioLine dishwashers.

Setting new standards for speed, cleaning performance and energy efficiency built-in dishwashers from Siemens are among the fastest and most economical in the world, without compromising on exceptional cleaning results. Thanks to innovative features such as Zeolith®, a mineral technology that delivers brilliant drying results, studioLine dishwashers offer an energy efficiency class of A+++.

Discover exciting additional features when purchasing studioLine dishwashing models:



### emotionLight Pro

Experience even more from Siemens, with the emotionLight Pro. Choose from up to 256 different colour variants and change the internal hue of your dishwasher, simply using the Home Connect App.




emotionLight Pro: Choose from up to 256 colours



### easyGlide rails

Using the telescopic rail system, ball bearings help to easily slide the baskets in and out of the machine. For total convenience the secure fixing of the baskets means there is no risk of them becoming misaligned under heavy weights.

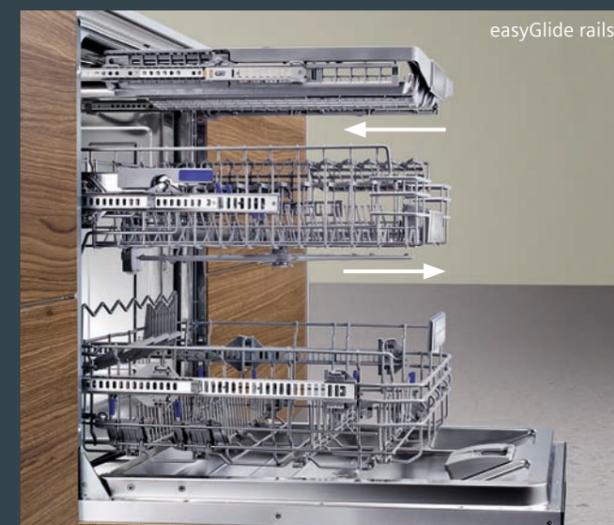

easyGlide rails

Model shown: SN878D26PE studioLine fully integrated dishwasher

Model shown above: SN878D26PE studioLine fully integrated dishwasher

# studioLine and standard 60cm dishwashers

studioLine

home connect



**iQ 700** SN878D26PE

studioLine

studioLine 60cm fully integrated dishwasher



## 60cm dishwasher specifications

| APPLIANCE TYPE  | 60CM STUDIO LINE  |
|---|---|
| <b>Design family</b>  | <b>iQ 700</b>   |
| Model number  | SN878D26PE  |
| Highlights  | easyGlide rails, emotionLight Pro, Home Connect, Zeolith®, door openAssist, timeLight, varioFlex Pro baskets, varioDrawer Pro |
| Control panel   | Black touch control with TFT display  |
| Height (cm) / Hinge type  | 81.5 / Fixed  |
| <b>DESIGN FEATURES</b>  |   |
| Home Connect Wi-Fi connectivity                                     | ■   |
| Floor projection display  | timeLight   |
| Door openAssist   | ■   |
| brilliantShine  | ■   |
| Drying system   | Zeolith®  |
| Interior emotionLight   | Pro (custom select colour)  |
| Basket type   | varioFlex Pro   |
| varioDrawer   | Retrofit varioDrawer Pro  |
| easyGlide rails   | ■   |
| Adjustable upper basket   | rackMatic™ 3 stage  |
| Largest loadable dish upper / lower rack (cm)                       | 27 / 31   |
| Number of flip tines in upper / lower basket                        | 6 / 8   |
| Real-time clock   | ■   |
| Start delay time max (h)  | 24  |
| End of cycle indicator  | Acoustic  |
| Rinse aid and salt light indicators                                 | ■   |
| hydroSensor and loadSensor technology                               | ■   |
| Child safety  | ■   |
| Self cleaning filter system   | ■   |
| hydroSafe 24 hour flood protection system                           | ■   |
| <b>PROGRAMMES / FUNCTIONS</b>                                       |   |
| List of programmes  | Intensive 70°C<br>Auto 45-65°C<br>Economy 50°C<br>Silence 50°C<br>Short 60°C<br>Glass 40°C<br>Quick Wash 45°C<br>Pre-Rinse    |
| Additional operational options                                      | Shine&Dry, Hygiene Plus, intensiveZone, Wi-Fi, varioSpeed Plus  |
| Machine care  | ■   |
| Number of different wash temperatures                               | 6   |
| <b>TECHNICAL INFORMATION</b>  |   |
| Reference programme for measurements                                | Economy 50  |
| Energy efficiency class   | A+++  |
| Total annual energy (kWh) / water (litres) consumption <sup>1</sup> | 230 / 2660  |
| Energy (kWh) / water (litres) consumption <sup>2</sup>              | 0.80 / 9.5  |
| Number of place settings  | 12  |
| Noise level (dB [A] re 1pW)   | 41 (39 in Silence programme)  |
| Total cycle time of reference programme (min)                       | 195   |
| Length of electrical supply cord (cm)                               | 175   |
| Length of inlet / outlet hose (cm)                                  | 165 / 190   |
| Maximum height for installation (mm)                                | 875   |
| Maximum adjustability feet (mm)                                     | 60  |
| Maximum width for installation (mm)                                 | 600   |
| Width / depth of the product (mm)                                   | 598 / 550   |
| Net weight / gross weight (kg)                                      | 54 / 56   |
| Maximum accepted water hardness                                     | 50°DH   |
| Maximum temperature for water intake (°C) <sup>3</sup>              | 60  |
| Interior cavity   | Stainless steel   |
| Included accessories  | Retrofit varioDrawer Pro, Steam deflection plate  |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Based on 280 standard cleaning cycles using cold water fill, including consumption of the standby mode.  
<sup>2</sup> The Consumption per cleaning cycle of the "Eco 50" programme using cold water fill.  
<sup>3</sup> We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmol/litre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice for further information. Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to ¾" screwed joint.



### varioFlex Pro basket system

varioFlex Pro Baskets create extra room for pots and pans. With an optimised lower basket design for large plates and adjustable sides highlighted with blue touchpoints, your dishwasher can adapt to any load quickly and easily.

### varioDrawer Pro included

Selected models now include a varioDrawer Pro, giving you a third loading level for cutlery and removing the need for a cutlery basket. This creates more room for large pots and pans below and includes space for small items such as ladles and espresso cups.

**Please note:** Models SN878D26PE and SX878D26PE will be supplied with a varioDrawer Pro in addition to specification.

studioLine

home connect

home connect



## 60cm dishwasher specifications

| APPLIANCE TYPE  | 60CM STUDIO LINE  | iQ 700   | 60CM FULLY INTEGRATED DISHWASHERS  | iQ 500   | iQ 500   |
|---|---|--|--|--|--|
| <b>Design family</b>  | <b>iQ 700</b>   | <b>iQ 700</b>  | <b>iQ 700</b>  | <b>iQ 500</b>  | <b>iQ 500</b>  |
| Model number  | SX878D26PE  | SN678D06TG   | SN678D01TG   | SN658D00MG   | SN658D01MG   |
| Highlights  | 86.5cm, easyGlide rails, emotionLight Pro, Home Connect, Zeolith®, door openAssist, timeLight, varioFlex Pro baskets, varioDrawer Pro | Home Connect, Zeolith®, door openAssist, TFT display, emotionLight (blue), timeLight, varioFlex Pro baskets, varioDrawer Pro | A+++, Zeolith®, door openAssist, TFT display, emotionLight (blue), timeLight, varioFlex Pro baskets, varioDrawer Pro       | A+++, Zeolith®, door openAssist, emotionLight (blue), timeLight, varioFlex baskets, varioDrawer                            | 6.5L, door openAssist, emotionLight (blue), timeLight, varioFlex baskets, varioDrawer                                      |
| Control panel   | Black touch control with TFT display  | Black touch control with TFT display   | Black touch control with TFT display   | Black touch control with LED display   | Black touch control with LED display   |
| Height (cm) / Hinge type  | 86.5 / Fixed  | 81.5 / Fixed   | 81.5 / Fixed   | 81.5 / Fixed   | 81.5 / Fixed   |
| <b>DESIGN FEATURES</b>  |   |  |  |  |  |
| Home Connect Wi-Fi connectivity                                     | ■   | ■  | –  | –  | –  |
| Floor projection display  | timeLight   | timeLight  | timeLight  | timeLight  | timeLight  |
| Door openAssist   | ■   | ■  | ■  | ■  | ■  |
| brilliantShine  | ■   | ■  | ■  | ■  | –  |
| Drying system   | Zeolith®  | Zeolith®   | Zeolith®   | Zeolith®   | Heat exchanger   |
| Interior emotionLight   | Pro (custom select colour)  | Blue   | Blue   | Blue   | Blue   |
| Basket type   | varioFlex Pro   | varioFlex Pro  | varioFlex Pro  | varioFlex with coloured touch points   | varioFlex with coloured touch points   |
| varioDrawer   | Retrofit varioDrawer Pro  | varioDrawer Pro  | varioDrawer Pro  | varioDrawer  | varioDrawer  |
| easyGlide rails   | ■   | –  | –  | –  | –  |
| Adjustable upper basket   | rackMatic™ 3 stage  | rackMatic™ 3 stage   | rackMatic™ 3 stage   | rackMatic™ 3 stage   | rackMatic™ 3 stage   |
| Largest loadable dish upper / lower basket (cm)                     | 29 / 34   | 21 / 31  | 21 / 31  | 21 / 31  | 21 / 31  |
| Number of flip tines in upper / lower basket                        | 6 / 8   | 6 / 8  | 6 / 8  | 2 / 4  | 2 / 4  |
| Real-time clock   | ■   | ■  | ■  | –  | –  |
| Start delay time max (h)  | 24  | 24   | 24   | 24   | 24   |
| End of cycle indicator  | Acoustic  | Acoustic   | Acoustic   | Acoustic   | Acoustic   |
| Rinse aid and salt light indicators                                 | ■   | ■  | ■  | ■  | ■  |
| hydroSensor and loadSensor technology                               | ■   | ■  | ■  | ■  | ■  |
| Child safety  | ■   | ■  | ■  | ■  | ■  |
| Self cleaning filter system   | ■   | ■  | ■  | ■  | ■  |
| hydroSafe 24 hour flood protection system                           | ■   | ■  | ■  | ■  | ■  |
| <b>PROGRAMMES / FUNCTIONS</b>                                       |   |  |  |  |  |
| List of programmes  | Intensive 70°C<br>Auto 45-65°C<br>Economy 50°C<br>Silence 50°C<br>Short 60°C<br>Glass 40°C<br>Quick Wash 45°C<br>Pre-Rinse            | Intensive 70°C<br>Auto 45-65°C<br>Economy 50°C<br>Silence 50°C<br>Short 60°C<br>Glass 40°C<br>Quick Wash 45°C<br>Pre-Rinse   | Intensive 70°C<br>Auto 45-65°C<br>Economy 50°C<br>Silence 50°C<br>Short 60°C<br>Glass 40°C<br>Quick Wash 45°C<br>Pre-Rinse | Intensive 70°C<br>Auto 45-65°C<br>Economy 50°C<br>Silence 50°C<br>Short 60°C<br>Glass 40°C<br>Quick Wash 45°C<br>Pre-Rinse | Intensive 70°C<br>Auto 45-65°C<br>Economy 50°C<br>Silence 50°C<br>Short 60°C<br>Glass 40°C<br>Quick Wash 45°C<br>Pre-Rinse |
| Additional operational options                                      | Shine&Dry, Hygiene Plus, intensiveZone, Wi-Fi, varioSpeed Plus  | Shine&Dry, Hygiene Plus, intensiveZone, Wi-Fi, varioSpeed Plus   | Shine&Dry, Hygiene Plus, intensiveZone, varioSpeed Plus  | Shine&Dry, Hygiene Plus, intensiveZone, varioSpeed Plus  | extraDry, Hygiene Plus, intensiveZone, varioSpeed Plus   |
| Machine care  | ■   | ■  | ■  | ■  | ■  |
| Number of different wash temperatures                               | 6   | 6  | 6  | 6  | 5  |
| <b>TECHNICAL INFORMATION</b>  |   |  |  |  |  |
| Reference programme for measurements                                | Economy 50  | Economy 50   | Economy 50   | Economy 50   | Economy 50   |
| Energy efficiency class   | A+++  | A+++   | A+++   | A+++   | A++  |
| Total annual energy (kWh) / water (litres) consumption <sup>1</sup> | 230 / 2660  | 234 / 2660   | 237 / 2660   | 237 / 2660   | 262 / 1820   |
| Energy (kWh) / water (litres) consumption <sup>2</sup>              | 0.80 / 9.5  | 0.83 / 9.5   | 0.83 / 9.5   | 0.83 / 9.5   | 0.92 / 6.5   |
| Number of place settings  | 12  | 14   | 14   | 14   | 13   |
| Noise level (dB [A] re 1pW)   | 41 (39 in Silence programme)  | 41 (39 in Silence programme)   | 42 (40 in Silence programme)   | 44 (42 in Silence programme)   | 44 (41 in Silence programme)   |
| Total cycle time of reference programme (min)                       | 195   | 195  | 195  | 195  | 195  |
| Length of electrical supply cord (cm)                               | 175   | 175  | 175  | 175  | 175  |
| Length of inlet / outlet hose (cm)                                  | 165 / 190   | 165 / 190  | 165 / 190  | 165 / 190  | 165 / 190  |
| Maximum height for installation (mm)                                | 925   | 875  | 875  | 875  | 875  |
| Maximum adjustability feet (mm)                                     | 60  | 60   | 60   | 60   | 60   |
| Maximum width for installation (mm)                                 | 600   | 600  | 600  | 600  | 600  |
| Width / depth of the product (mm)                                   | 598 / 550   | 598 / 550  | 598 / 550  | 598 / 550  | 598 / 550  |
| Net weight / gross weight (kg)                                      | 55 / 57   | 52 / 54  | 47 / 49  | 41 / 43  | 41 / 43  |
| Maximum accepted water hardness                                     | 50°DH   | 50°DH  | 50°DH  | 50°DH  | 50°DH  |
| Maximum temperature for water intake (°C) <sup>3</sup>              | 60  | 60   | 60   | 60   | 60   |
| Interior cavity   | Stainless steel   | Stainless steel  | Stainless steel  | Stainless steel  | Stainless steel  |
| Included accessories  | Retrofit varioDrawer Pro, Steam deflection plate  | Large item spray head, Glass tray, Steam deflection plate  | Large item spray head, Glass tray, Steam deflection plate  | Large item spray head, Glass tray, Steam deflection plate  | Large item spray head, Glass tray, Steam deflection plate  |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Based on 280 standard cleaning cycles using cold water fill, including consumption of the standby mode.  
<sup>2</sup> The Consumption per cleaning cycle of the "Eco 50" programme using cold water fill.  
<sup>3</sup> We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmol/litre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice for further information. Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to ¾" screwed joint.

60cm dishwasher specifications



| APPLIANCE TYPE  | 60CM FULLY INTEGRATED DISHWASHERS  |   |   |   |
|---|--|---|---|---|
| Design family   | iQ 500   | iQ 300  | iQ 300  | iQ 300  |
| Model number  | SN658D02MG   | SN736X03ME  | SX736X03ME  | SN636X00KG  |
| Highlights  | 39dB, door openAssist, emotionLight (blue), timeLight, varioFlex baskets, varioDrawer                                  | varioHinge, A++, infoLight (blue), varioDrawer                                      | 86.5cm, varioHinge, A++, infoLight (blue), varioDrawer                              | infoLight (blue), varioDrawer   |
| Control panel   | Black touch control with LED display   | Stainless steel push button with LED display  | Stainless steel push button with LED display  | Black push button with LED display  |
| Height (cm) / Hinge type  | 81.5 / Fixed   | 81.5 / varioHinge   | 86.5 / varioHinge   | 81.5 / Fixed  |
| <b>DESIGN FEATURES</b>  |  |   |   |   |
| Home Connect Wi-Fi connectivity                                     | -  | -   | -   | -   |
| Floor projection display  | timeLight  | infoLight (blue)  | infoLight (blue)  | infoLight (blue)  |
| Door openAssist   | ■  | -   | -   | -   |
| brilliantShine  | -  | -   | -   | -   |
| Drying system   | Heat exchanger   | Heat exchanger  | Heat exchanger  | Heat exchanger  |
| Interior emotionLight   | Blue   | -   | -   | -   |
| Basket type   | varioFlex with coloured touch points   | varioFlex   | varioFlex   | varioFlex   |
| varioDrawer   | varioDrawer  | varioDrawer   | varioDrawer   | varioDrawer   |
| easyGlide rails   | -  | -   | -   | -   |
| Adjustable upper basket   | rackMatic™ 3 stage   | rackMatic™ 3 stage  | rackMatic™ 3 stage  | rackMatic™ 3 stage  |
| Largest loadable dish upper / lower basket (cm)                     | 21 / 31  | 21 / 31   | 23 / 34   | 21 / 31   |
| Number of flip tines in upper / lower basket                        | 2 / 4  | 2 / 4   | 2 / 4   | 2 / 4   |
| Real-time clock   | -  | -   | -   | -   |
| Start delay time max (h)  | 24   | 24  | 24  | 24  |
| End of cycle indicator  | Acoustic   | Acoustic  | Acoustic  | Acoustic  |
| Rinse aid and salt light indicators                                 | ■  | ■   | ■   | ■   |
| hydroSensor and loadSensor technology                               | ■  | ■   | ■   | ■   |
| Child safety  | ■  | -   | -   | -   |
| Self cleaning filter system   | ■  | ■   | ■   | ■   |
| hydroSafe 24 hour flood protection system                           | ■  | ■   | ■   | ■   |
| <b>PROGRAMMES / FUNCTIONS</b>                                       |  |   |   |   |
| List of programmes  | Intensive 70°C<br>Auto 45-65°C<br>Economy 50°C<br>Silence 50°C<br>Glass 40°C<br>1 hour<br>Quick Wash 45°C<br>Pre-Rinse | Intensive 70°C<br>Auto 45-65°C<br>Economy 50°C<br>Glass 40°C<br>1 hour<br>Pre-Rinse | Intensive 70°C<br>Auto 45-65°C<br>Economy 50°C<br>Glass 40°C<br>1 hour<br>Pre-Rinse | Intensive 70°C<br>Auto 45-65°C<br>Economy 50°C<br>Silence 50°C<br>Glass 40°C<br>1 hour<br>Quick Wash 45 |
| Additional operational options                                      | extraDry, Hygiene Plus, intensiveZone, varioSpeed Plus   | extraDry, intensiveZone, varioSpeed Plus  | extraDry, intensiveZone, varioSpeed Plus  | extraDry, varioSpeed Plus   |
| Machine care  | ■  | ■   | ■   | ■   |
| Number of different wash temperatures                               | 5  | 5   | 5   | 5   |
| <b>TECHNICAL INFORMATION</b>  |  |   |   |   |
| Reference programme for measurements                                | Economy 50   | Economy 50  | Economy 50  | Economy 50  |
| Energy efficiency class   | A+   | A++   | A++   | A++   |
| Total annual energy (kWh) / water (litres) consumption <sup>1</sup> | 299 / 2660   | 266 / 2660  | 266 / 2660  | 262 / 2660  |
| Energy (kWh) / water (litres) consumption <sup>2</sup>              | 1.05 / 9.5   | 0.93 / 9.5  | 0.93 / 9.5  | 0.92 / 9.5  |
| Number of place settings  | 14   | 14  | 14  | 13  |
| Noise level (dB [A] re 1pW)   | 39 (37 in Silence programme)   | 44  | 44  | 46  |
| Total cycle time of reference programme (min)                       | 195  | 210   | 210   | 210   |
| Length of electrical supply cord (cm)                               | 175  | 175   | 175   | 175   |
| Length of inlet / outlet hose (cm)                                  | 165 / 190  | 165 / 190   | 165 / 190   | 165 / 190   |
| Maximum height for installation (mm)                                | 875  | 875   | 925   | 875   |
| Maximum adjustability feet (mm)                                     | 60   | 60  | 60  | 60  |
| Maximum width for installation (mm)                                 | 600  | 600   | 600   | 600   |
| Width / depth of the product (mm)                                   | 598 / 550  | 598 / 550   | 598 / 550   | 598 / 550   |
| Net weight / gross weight (kg)                                      | 48 / 50  | 39 / 41   | 40 / 42   | 36 / 38   |
| Maximum accepted water hardness                                     | 50°DH  | 50°DH   | 50°DH   | 50°DH   |
| Maximum temperature for water intake (°C) <sup>3</sup>              | 60   | 60  | 60  | 60  |
| Interior cavity   | Stainless steel  | Stainless steel   | Stainless steel   | Stainless steel / Polinox base  |
| Included accessories  | Large item spray head, Glass tray, Steam deflection plate  | Steam deflection plate  | Steam deflection plate  | Large item spray head, Steam deflection plate   |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Based on 280 standard cleaning cycles using cold water fill, including consumption of the standby mode.

<sup>2</sup> The Consumption per cleaning cycle of the "Eco 50" programme using cold water fill.

<sup>3</sup> We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmol/litre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice for further information. Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to 3/4" screwed joint.

# Slimline 45cm dishwashers

## iQ 500 SR656X01TE

### Fully integrated 45cm slimline dishwasher



#### Slimline

Slimline designs are perfect for kitchens with limited space. Enjoy the same exciting features as the 60cm models including Zeolith® in one of our 45cm models or hydroDry in the other. Explore flexible shelving choices to hold an extra capacity of dishes, as well as convenience features such as door open assist and timeLight.

Slimline 45cm dishwasher specifications



| APPLIANCE TYPE  | 45CM FULLY INTEGRATED SLIMLINE DISHWASHERS   |   |
|---|--|---|
| Design family   | iQ 500   | iQ 500  |
| Model number  | SR656X01TE   | SR636D00MG  |
| Highlights  | A+++, Zeolith®, emotionLight (blue), timeLight, varioFlex Pro baskets, varioDrawer Pro     | Door openAssist, A++, infoLight, varioFlex baskets, varioDrawer                           |
| Control panel   | Stainless steel push button with LED display   | Black push button with LED display  |
| Height (cm) / Hinge type  | 81.5 / Fixed   | 81.5 / Fixed  |
| <b>DESIGN FEATURES</b>  |  |   |
| Home Connect Wi-Fi connectivity                                     | -  | -   |
| Floor projection display  | timeLight  | infoLight   |
| Door openAssist   | -  | ■   |
| brilliantShine  | -  | -   |
| Drying system   | Zeolith®   | Heat exchanger  |
| Interior emotionLight   | Blue   | -   |
| Basket type   | varioFlex Pro  | varioFlex   |
| varioDrawer   | varioDrawer Pro  | varioDrawer   |
| easyGlide rails   | -  | -   |
| Adjustable upper basket   | rackMatic™ 3 stage   | rackMatic™ 3 stage  |
| Largest loadable dish upper / lower basket (cm)                     | 21 / 31  | 21 / 31   |
| Number of flip tines in upper / lower basket                        | 3 / 4  | 2 / 2   |
| Real-time clock   | -  | -   |
| Start delay time max (h)  | 24   | 24  |
| End of cycle indicator  | Acoustic   | Acoustic  |
| Rinse aid and salt light indicators                                 | ■  | ■   |
| hydroSensor and loadSensor technology                               | ■  | ■   |
| Child safety  | -  | ■   |
| Self cleaning filter system   | ■  | ■   |
| hydroSafe 24 hour flood protection system                           | ■  | ■   |
| <b>PROGRAMMES / FUNCTIONS</b>                                       |  |   |
| List of programmes  | Intensive 70°C<br>Auto 45-65°C<br>Economy 50°C<br>Silence 50°C<br>Short 60°C<br>Glass 40°C | Intensive 70°C<br>Auto 45-65°C<br>Economy 50°C<br>Silence 50°C<br>1 hour<br>Quick Wash 45 |
| Additional operational options                                      | Shine&Dry, intensiveZone, varioSpeed Plus  | Hygiene Plus, intensiveZone, varioSpeed Plus  |
| Machine care  | ■  | ■   |
| Number of different wash temperatures                               | 6  | 4   |
| <b>TECHNICAL INFORMATION</b>  |  |   |
| Reference programme for measurements                                | Economy 50   | Economy 50  |
| Energy efficiency class   | A+++   | A++   |
| Total annual energy (kWh) / water (litres) consumption <sup>1</sup> | 188 / 2660   | 211 / 2660  |
| Energy (kWh) / water (litres) consumption <sup>2</sup>              | 0.66 / 9.5   | 0.74 / 9.5  |
| Number of place settings  | 10   | 10  |
| Noise level (dB [A] re 1pW)   | 43 (41 in Silence programme)   | 46 (43 in Silence programme)  |
| Total cycle time of reference programme (min)                       | 195  | 195   |
| Length of electrical supply cord (cm)                               | 175  | 175   |
| Length of inlet / outlet hose (cm)                                  | 165 / 205  | 165 / 205   |
| Maximum height for installation (mm)                                | 875  | 875   |
| Maximum adjustability feet (mm)                                     | 60   | 60  |
| Maximum width for installation (mm)                                 | 450  | 450   |
| Width / depth of the product (mm)                                   | 448 / 550  | 448 / 550   |
| Net weight / gross weight (kg)                                      | 41 / 42  | 32 / 33   |
| Maximum accepted water hardness                                     | 50°DH  | 50°DH   |
| Maximum temperature for water intake (°C) <sup>3</sup>              | 60   | 60  |
| Interior cavity   | Stainless steel  | Stainless steel   |
| Included accessories  | Steam deflection plate   | Large item spray head, Steam deflection plate   |

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup> Based on 280 standard cleaning cycles using cold water fill, including consumption of the standby mode.

<sup>2</sup> The Consumption per cleaning cycle of the "Eco 50" programme using cold water fill.

<sup>3</sup> We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmol/litre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice for further information. Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to 3/4" screwed joint.

# Laundry care, high performance with state-of-the-art technology.

Siemens has created a built-in laundry range that is cleverly designed and quietly energy efficient, developed to make laundry easier and less of a chore.

Our machines take full advantage of the latest technology and innovation all behind closed doors. Cleverly designed and quietly efficient our built-in washing machines and washer dryers produce beautifully clean clothes whilst fitting seamlessly within your furniture. Performance behind the door.

Siemens laundry warranties:

**2**  
Year Warranty

**2 Year Warranty**  
A Two Year Warranty is available as on all Siemens washing machines and washer dryers listed in this brochure to protect against manufacturing and material faults during this warranty period.

**AquaStop**  
Lifetime Warranty

**AquaStop Lifetime Warranty**  
Selected Siemens laundry appliances have a lifetime AquaStop warranty to protect against water damage caused by a defective AquaStop system. For models with this warranty please check the matrix.

**iQdrive® Motor**  
**10**  
Year Warranty

**iQdrive® Motor 10 Year Warranty**  
The iQdrive® Motor Warranty is available on selected laundry machines to protect against any defects to the iQdrive® motor. For models with this warranty please check the laundry matrix.

To find out more about your warranty and for registration please refer to page 179.

Model shown: **WI14W500GB** washing machine



# Key features in laundry care.



Efficient Laundry appliances that can be concealed neatly behind the door, helping to retain clean lines and modern aesthetics, with a range of key features that all help to make laundry less of a chore.



**reload**

The reload function allows the machine to be paused and the door opened at the next safe opportunity. It is the perfect solution when an extra item needs to be added to the load.



**Foam detection**

Detects if too much foam has been created in the wash, if so, it will adjust the drum movement and add an extra rinse cycle if necessary.



**Night wash programme**

Specially designed to wash and dry up to 4kg overnight. Particularly quiet wash programme with a reduced final spin.



**rapid15**

Washes, rinses and spins lightly soiled clothing in just 15 minutes, designed for those with hectic lives this wash cycle will clean clothes when you are in a hurry.



**Wool programme**

An exceptionally gentle woollen hand wash programme. The drum is set to provide a cradle motion, with only an occasional rotation, giving a soft wash action. A special spin phase finishes the cycle.



**Shirts/Blouses**

The ideal programme for a weeks' worth of shirts, offering a reduced spin to reduce ironing. Suitable for up to 2kg worth of washing, this cycle is designed to run for just over an hour.



**Mixed fabrics**

Perfect for the mid-week wash of a mixture of cottons, hard-wearing or easy-care fabrics, load up to 4kg worth of garments with a running time of just 49 minutes.



**Delicates/silk**

This gentle programme is perfect for those delicate, washable fabrics, e.g. silk, satin, synthetics or blended fabrics (e.g. curtains). Cool temperatures, gentle spinning between the rinse cycles, and reduced final spin speeds reduces creases dramatically.



**autoLoad**

Removes the guesswork from laundry, automatically selecting the correct programme for your clothes to produce the best results. All you need to do is add detergent and laundry – the machine will do the rest.

**Extremely Quiet washing machines**

Thanks to the brushless iQdrive motor and antiVibration side panels, Siemens built-in washing machines are particularly quiet in their class.

**Extremely Quiet washer dryers**

Our washer dryers are designed to be as quiet as possible while still offering excellent performance and results when washing and drying, so you can get on with your day without any disturbance.



Model shown: W114W500GB washing machine

# The complete laundry solution with features that fit around your lifestyle.

## Features specific to washing machines



**Energy efficient washing machines**  
Siemens washing machines automatically adapt the wash time and energy consumption to the amount of laundry in the machine. All of the washing machines in the built in range are rated A+++.



**Capacity**  
The large 8kg drum capacity is the perfect size to hold more laundry and reduce the number of loads you have to wash.



**Drum Clean**  
An automatic alert after 20 washes to run the Drum Clean programme on a 90°C or 60°C wash keeps the appliance clean and odour free.



**varioSpeed**  
Get perfectly clean laundry in up to 50% less time. This feature can automatically detect when time can be saved. The smart sensor identifies load volume and textile kind, hence adapting the washing machines process time efficiently to suit the specific load.



**timeLight**  
Stay in control and let the laundry fit around you. The timeLight projects the remaining cycle time and programme status onto any floor surface to keep you informed at a glance, and is visible without opening the cabinet door.



Model shown: WI14W500GB washing machine



## Features specific to washer dryers



**Energy efficient washer dryers**  
All Siemens washer dryers automatically adapt the wash time and energy consumption to the amount of laundry in the machine.



**Washing capacity**  
The large 7kg washing capacity ensures you can wash clothes with fewer loads.



**Drying capacity**  
The 4kg drying capacity ensures you can dry clothes effectively.



**Washing + Drying**  
The continuous washing and drying cycle is suitable for loads up to 4kg. This cycle will first wash the clothes on your chosen setting and once finished, automatically switches to drying the clothes for ease and speed.



**autoDry**  
Gently dries laundry to exactly the degree of dryness you want.



**ActiveWater™**  
Saves water and costs thanks to a 2-step automatic load adjustment system.



**Fluff removal programme**  
A ten minute fluff removal cycle on washer dryers that removes fluff deposits in the machine. A light indicates when this is needed.



**Outdoor**  
This programme applies a waterproof treatment to breathable fabrics, prolonging the life of high quality functional clothing like winter jackets, fleeces and ski suits.

# Washing machines and washer dryers

## iQ 700 WI14W500GB

Washing machine  
White 1400rpm spin speed



### Integrated washing machine specifications

| APPLIANCE TYPE                                     | WASHING MACHINES   |                    |
|--|--------------------|--------------------|
| Design family                                      | iQ 700             | iQ 500             |
| Model number                                       | WI14W500GB         | WI14W300GB         |
| <b>PROGRAMMES / FUNCTIONS</b>                      |                    |                    |
| <b>Standard Programmes</b>                         |                    |                    |
| - Cottons  | -                  | -                  |
| - Easy-care programme                              | ■                  | ■                  |
| - Wool programme                                   | ■                  | ■                  |
| - Delicates / silk                                 | ■ / ■              | ■ / -              |
| - Intensive dry                                    | -                  | -                  |
| - Gentle dry                                       | -                  | -                  |
| - Rinse  | ■                  | ■                  |
| - Spin   | ■                  | ■                  |
| - Empty  | -                  | -                  |
| <b>Specialist Programmes</b>                       |                    |                    |
| - rapid15  | ■                  | ■                  |
| - Night wash                                       | -                  | -                  |
| - Shirts/blouses                                   | ■                  | -                  |
| - Outdoor  | -                  | -                  |
| - Mixed fabrics                                    | ■                  | ■                  |
| - Fluff removal programme                          | -                  | -                  |
| <b>Options</b>                                     |                    |                    |
| - Intensive  | -                  | -                  |
| - Less ironing                                     | -                  | -                  |
| - Extra rinse                                      | -                  | ■                  |
| - Prewash  | -                  | -                  |
| - Variable temperature                             | ■                  | -                  |
| - Variable spin                                    | -                  | -                  |
| - Spin speed reduction                             | ■                  | ■                  |
| - flexiTime  | -                  | -                  |
| <b>ADDITIONAL FEATURES</b>                         |                    |                    |
| iQdrive  | ■                  | ■                  |
| AquaStop   | ■                  | ■                  |
| reload   | ■                  | ■                  |
| Foam detection                                     | ■                  | ■                  |
| Drum Clean   | ■                  | ■                  |
| timeLight  | ■                  | ■                  |
| autoLoad   | ■                  | ■                  |
| varioSpeed   | ■                  | ■                  |
| <b>PERFORMANCE &amp; CONSUMPTION</b>               |                    |                    |
| Energy efficiency class                            | A+++               | A+++               |
| Capacity cotton washing (kg)                       | 8                  | 8                  |
| Capacity cotton drying (kg)                        | -                  | -                  |
| Maximum spin speed (rpm)                           | 1400               | 1400               |
| Drum volume (litres)                               | 53                 | 53                 |
| <b>TECHNICAL INFORMATION</b>                       |                    |                    |
| Dimensions of the product: H x W x D exc door (cm) | 81.8 x 59.6 x 57.4 | 81.8 x 59.6 x 57.4 |
| Display  | LED                | LED                |
| Cabinet colour                                     | White              | White              |
| Door opening (°)                                   | 130                | 130                |
| Door hinge   | Left-hand          | Left-hand          |

■ Yes, model has this feature. - Feature not available for this model.

The full specification for Siemens washing machines and washer dryers can be viewed online, via our website [siemens-home.bsh-group.com/uk/](http://siemens-home.bsh-group.com/uk/)

## iQ 500 WK14D541GB

Washer dryer  
White 1400rpm spin speed




### Integrated washer dryer specifications

| APPLIANCE TYPE                                     | WASHER DRYERS    |                  |
|--|------------------|------------------|
| Design family                                      | iQ 500           | iQ 300           |
| Model number                                       | WK14D541GB       | WK14D321GB       |
| <b>PROGRAMMES / FUNCTIONS</b>                      |                  |                  |
| <b>Standard Programmes</b>                         |                  |                  |
| - Cottons  | ■                | ■                |
| - Easy-care programme                              | ■                | ■                |
| - Wool programme                                   | ■                | ■                |
| - Delicates / silk                                 | ■                | ■                |
| - Intensive dry                                    | ■                | ■                |
| - Gentle dry                                       | ■                | ■                |
| - Rinse  | ■                | ■                |
| - Spin   | ■                | ■                |
| - Empty  | ■                | ■                |
| <b>Specialist Programmes</b>                       |                  |                  |
| - rapid15  | ■                | -                |
| - Night wash                                       | ■                | -                |
| - Shirts/blouses                                   | ■                | -                |
| - Outdoor  | ■                | -                |
| - Mixed fabrics                                    | ■                | ■                |
| - Fluff removal programme                          | ■                | ■                |
| <b>Options</b>                                     |                  |                  |
| - Intensive  | ■                | ■                |
| - Less ironing                                     | ■                | ■                |
| - Extra rinse                                      | ■                | ■                |
| - Prewash  | ■                | ■                |
| - Variable temperature                             | ■                | ■                |
| - Variable spin                                    | ■                | ■                |
| - Spin speed reduction                             | ■                | ■                |
| - flexiTime  | ■                | ■                |
| <b>ADDITIONAL FEATURES</b>                         |                  |                  |
| iQdrive  | -                | -                |
| AquaStop   | ■                | -                |
| reload   | ■                | ■                |
| Foam detection                                     | ■                | ■                |
| autoLoad   | ■                | ■                |
| autoDry  | ■                | -                |
| activeWater™                                       | ■                | -                |
| <b>PERFORMANCE &amp; CONSUMPTION</b>               |                  |                  |
| Energy efficiency class                            | B                | B                |
| Capacity cotton washing (kg)                       | 7                | 7                |
| Capacity cotton drying (kg)                        | 4                | 4                |
| Maximum spin speed (rpm)                           | 1400             | 1400             |
| Drum volume (litres)                               | 52               | 52               |
| <b>TECHNICAL INFORMATION</b>                       |                  |                  |
| Dimensions of the product: H x W x D exc door (cm) | 82 x 59.5 x 58.4 | 82 x 59.5 x 58.4 |
| Display  | LED              | LED              |
| Cabinet colour                                     | White            | White            |
| Door opening (°)                                   | 95               | 95               |
| Door hinge   | Left-hand        | Left-hand        |

■ Yes, model has this feature. - Feature not available for this model.

The full specification for Siemens washing machines and washer dryers can be viewed online, via our website [siemens-home.bsh-group.com/uk/](http://siemens-home.bsh-group.com/uk/)

| ACCESSORIES FOR WASHER DRYERS                                    |          |
|--|----------|
| Accessory  | WZ20440  |
| Floor Securing Component Fixing kit                              | WX975600 |
| F1i / F2i / DSI Height adjustment grid Accessory washing machine | WZ20470  |

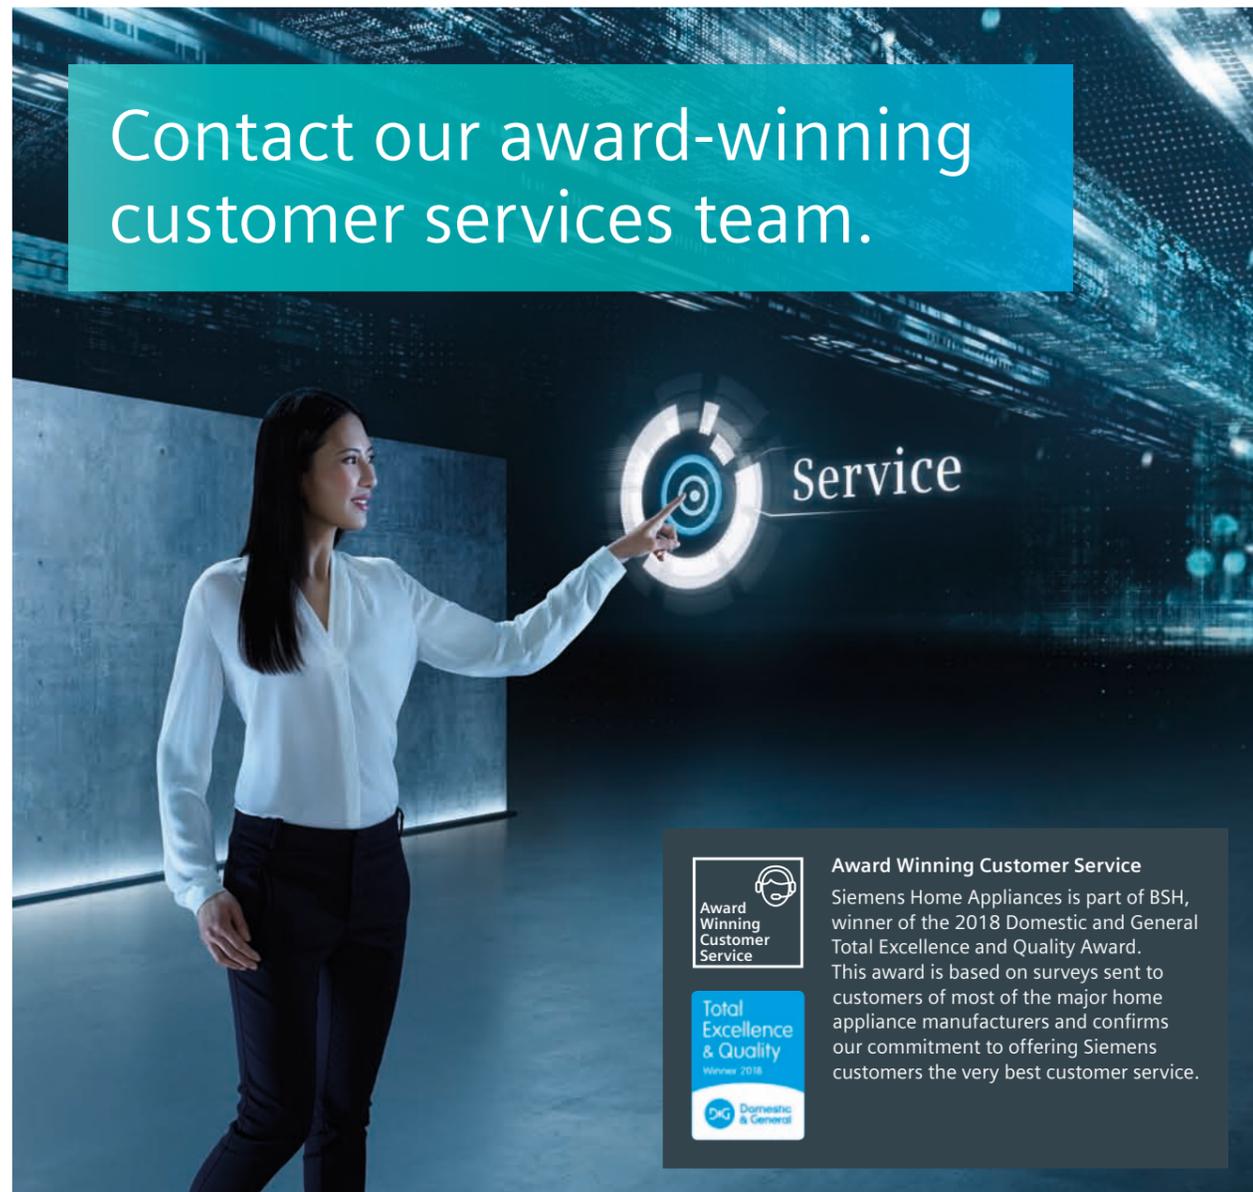

Contact our award-winning customer services team.



**Award Winning Customer Service**  
Siemens Home Appliances is part of BSH, winner of the 2018 Domestic and General Total Excellence and Quality Award. This award is based on surveys sent to customers of most of the major home appliance manufacturers and confirms our commitment to offering Siemens customers the very best customer service.

Purchasing a Siemens appliance gives you access to our expert customer service team for the lifetime of your appliance. With 2 year and 5 year manufacturer's warranties on offer\*, multi-award winning products to choose from and assistance from an outstanding customer service department, you can be assured that the appliance you are buying will offer peace of mind.

**Expert advice**  
Siemens customer service staff are full of knowledge and expertise, whether you have a question about your Siemens appliance, want to order replacement spare parts or require an engineer to repair your appliance. With engineers based locally across the country\*\*, no one is better suited to help, and all Siemens repairs are analysed in advance so that we bring the correct replacement spare parts likely to be needed on the first visit\*\*\*.

**Original replacement spare parts**  
Order replacement parts online and access exploded diagrams to help you locate the correct part. As a manufacturer we only use original spare parts and we keep a comprehensive range of parts available for up to ten years to ensure the quality of your appliance. You can also browse appliance diagrams online to locate and purchase the parts you need.

**Accessories and cleaning products**  
You can order accessories and cleaning products quickly and easily via our Siemens online shop. The Siemens shop has an extensive selection of accessories to help you get the most out of your Siemens appliance. With our range of tested and approved cleaning and care products you can keep your appliance looking great and working at its optimum performance. You can quickly order accessories and cleaning products by telephone on 0344 892 8999 (option 2) or by visiting our online shop at [www.siemens-home.bsh-group.com/uk/shop](http://www.siemens-home.bsh-group.com/uk/shop).

**Arrange a Siemens engineer visit**  
Need to arrange an engineer visit? No problem. Simply call our customer service team to discuss the problem with your appliance and if needed we will arrange a home appointment with an engineer at a time and date that's convenient for you. Siemens appliances are built to the highest standards but if you do require an engineer to repair your appliance, we are here to help, whether your appliance is inside or outside the manufacturer's warranty period. You can book an appointment by telephone on 0344 892 8999 (option 1) or you can book online.

Our engineers are employed and trained by Siemens and are based locally around the country\*\*.

No one knows our appliances better, and all repairs are analysed in advance by our technical team so that the parts likely to be needed to complete the repair are sent to the engineer's van the night before the visit\*\*\*.

Our advisors provide expert assistance

- Product information before and after purchase
- Tips on functions and operation
- User related queries
- Help with Siemens promotions

Telephone:  
UK: 0344 892 8999 (options 3 and 4)

For product support available 24 hours a day visit our website for:

- Product information
- Downloadable brochures
- Videos
- Instruction manuals
- FAQs

[siemens-home.bsh-group.com/uk](http://siemens-home.bsh-group.com/uk)  
[siemens-home.bsh-group.com/ie](http://siemens-home.bsh-group.com/ie)

**Accessories and cleaning products**  
We stock an extensive selection of accessories and cleaning products to help you make the most of your Siemens appliance.

- Original accessories for Siemens appliances
- Tested and approved cleaning and care products
- Quickly and easily order your accessories and cleaning products by telephone or via our online shop

Telephone:  
UK: 0344 892 8999 (option 2)  
IRL: 01450 2655

[siemens-home.bsh-group.com/uk](http://siemens-home.bsh-group.com/uk)  
[siemens-home.bsh-group.com/ie](http://siemens-home.bsh-group.com/ie)

**Replacement spare parts**  
As the manufacturer, we only use original spare parts to ensure the quality of your appliance.

- Comprehensive range of parts kept available for up to 10 years
- Original spare parts
- Browse appliance diagrams online to locate and purchase the parts you need

Telephone:  
UK: 0344 892 8999 (option 2)  
IRL: 01450 2655

[siemens-home.bsh-group.com/uk](http://siemens-home.bsh-group.com/uk)  
[siemens-home.bsh-group.com/ie](http://siemens-home.bsh-group.com/ie)

**Arrange an engineer visit**  
Siemens appliances are built to the highest standards but if you do require an engineer to repair your appliance, we are here to help, whether your appliance is inside or outside the manufacturer's warranty period. Our engineers are employed and trained by Siemens and are based locally around the country\*.

No one knows our appliances better, and all repairs are analysed in advance by our technical team so that the parts likely to be needed to complete the repair are sent to the engineer's van the night before the visit\*\*\*.

- Arrange an engineer appointment at a time and date that's convenient for you

Telephone:  
UK: 0344 892 8999 (option 1)  
IRL: 01450 2655

[www.siemens-home.bsh-group.com/uk](http://www.siemens-home.bsh-group.com/uk)  
[www.siemens-home.bsh-group.com/ie](http://www.siemens-home.bsh-group.com/ie)\*\*\*\*

## Register your manufacturer's warranty

### Register my appliance

Siemens recommends that you register all home appliances to ensure you can be easily contacted in the event of an important product update. For more information about registering appliances of all brands, please visit: [www.registermyappliance.org.uk](http://www.registermyappliance.org.uk)

**2 Year Warranty**  
All Siemens home appliances have a Siemens Two Year Manufacturer's Warranty as standard to protect against manufacturing or material faults and defects during this warranty period.

To register telephone:  
UK: 0800 519 2116  
IRL: 01230 0344

Or register online:  
[siemens-home.bsh-group.com/uk](http://siemens-home.bsh-group.com/uk)  
[siemens-home.bsh-group.com/ie](http://siemens-home.bsh-group.com/ie)

**5 Year Warranty**  
A Siemens Five Year Warranty is available on all Siemens aCool appliances and American fridge freezers to protect against manufacturing or material faults and defects during this warranty period.

To register telephone:  
UK: 0344 892 8999 (option 5)  
IRL: 01450 2655

Or register online:  
[siemens-home.bsh-group.com/uk](http://siemens-home.bsh-group.com/uk)  
[siemens-home.bsh-group.com/ie](http://siemens-home.bsh-group.com/ie)

**10 Year iQdrive® Motor Warranty**  
Protects against manufacturing or material faults and defects to the iQdrive motor only during this warranty period. Selected laundry appliances only.

**10 Year Anti-Rust Warranty for dishwashers**  
Protects against rust in the inner cavity of the appliance during this warranty period. Applies to dishwasher appliances only.

**10 Year Compressor Drive Warranty**  
Covers defects in the compressor motor. Applies to selected cooling appliances only.

**Lifetime AquaStop Warranty**  
A lifetime warranty to protect against water damage caused by a defective AquaStop system. Applies to selected laundry and dishwasher appliances only.

## Brochures

24-hour hotline or visit our website.

Call us on:  
UK: 0344 892 8999 (option 3)  
IRL: 01450 2655

Lines are open 24 hours a day. Our specialist advisors are available Monday to Friday 08:00am to 20:00pm, Saturday 09:00am to 17:00pm and Sunday 09:00am to 16:00pm. Calls are charged at the basic rate, please check with your telephone service for exact charges.


[siemens-home.bsh-group.com/uk](http://siemens-home.bsh-group.com/uk)  
[siemens-home.bsh-group.com/ie](http://siemens-home.bsh-group.com/ie)

Order your brochures or download PDF copies from our website.



\* The 5 year manufacturer's warranty is available on selected appliance models only.  
\*\* In certain areas we may use an approved service partner.  
\*\*\* This process may vary where approved service partners are used by us.  
\*\*\*\* Online booking not available in the Republic of Ireland.  
† iQdrive warranty covers the cost of a replacement motor only. All labour and call-out charges outside of the 5 year warranty are not covered. A full copy of our warranty terms and conditions is available on request, or can be viewed via the Siemens website.  
Calls to 0344 numbers are charged at the basic rate, please check with your telephone service provider for exact charges.

SIEMENS

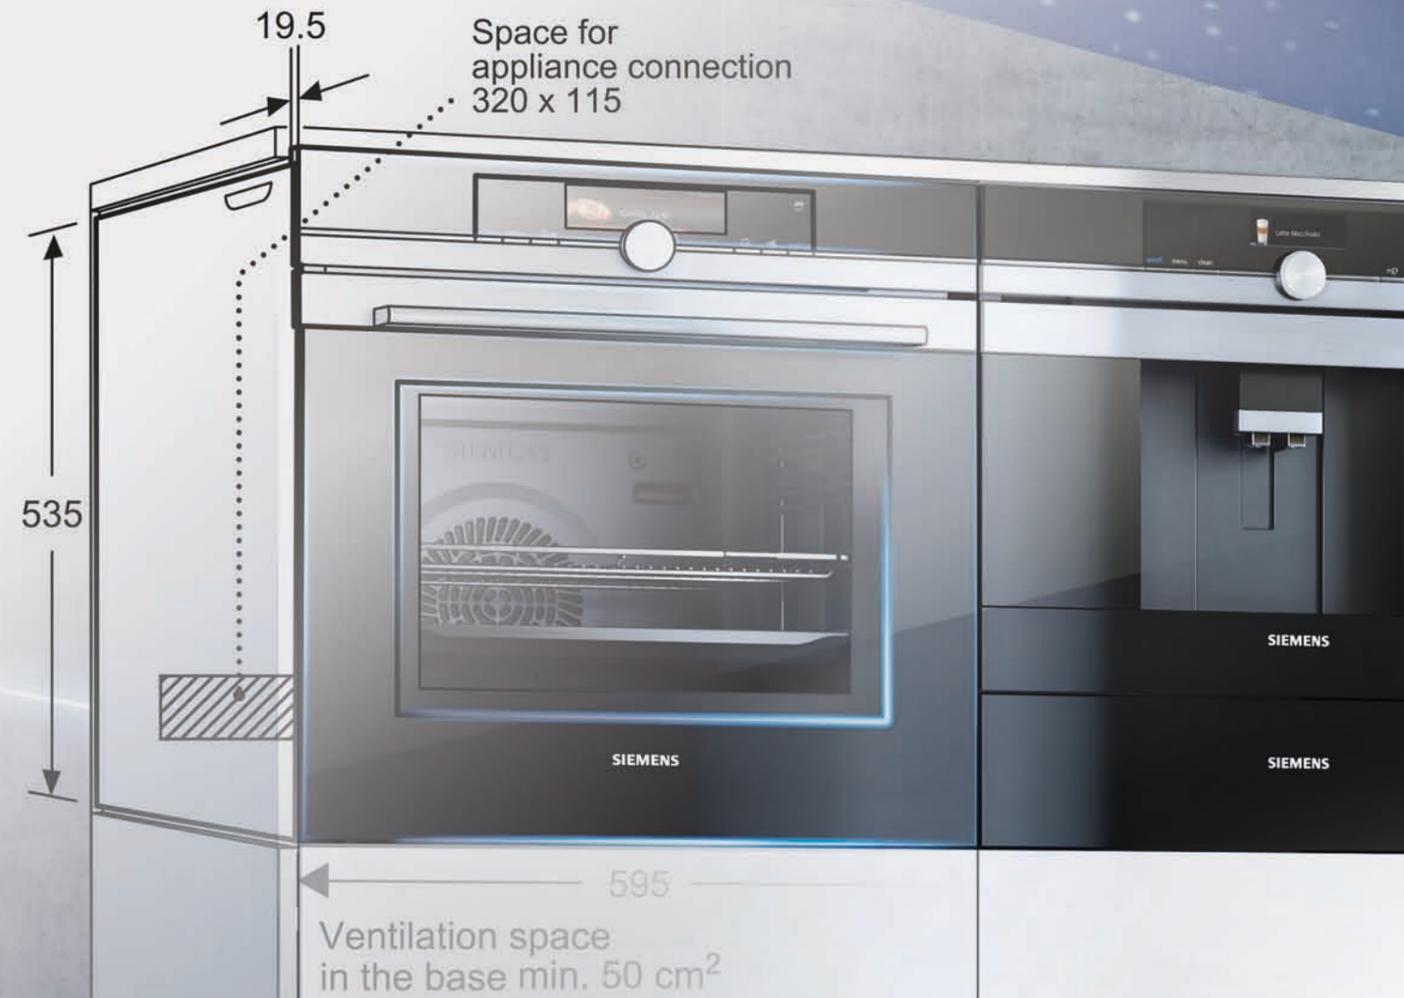

## Product installation guide


Making every day less everyday. Discover exciting possibilities and innovative features with Siemens built-in appliances.

The future moving in.


Siemens Home Appliances

# Coffee centre technical diagrams

Coffee centres CT836LEB6, CT636LES6

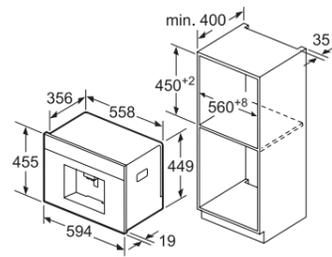


Bean and water containers are removed from the front. Recommended installation height 95-145cm.

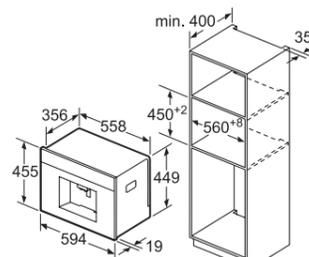


Bean and water containers are removed from the front. Recommended installation height 95-145cm.

left corner installation




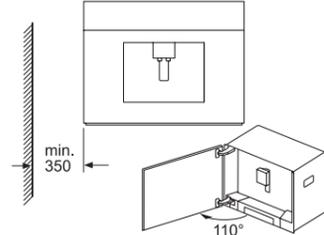


If using the 92° hinge limiter (spare part no. 00636455), the minimum distance to the wall is only 100mm.

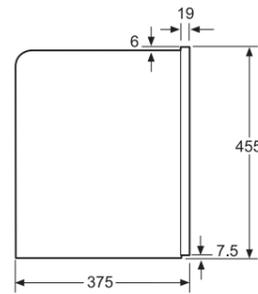




# Oven technical diagrams

Single oven HN878G4B6B

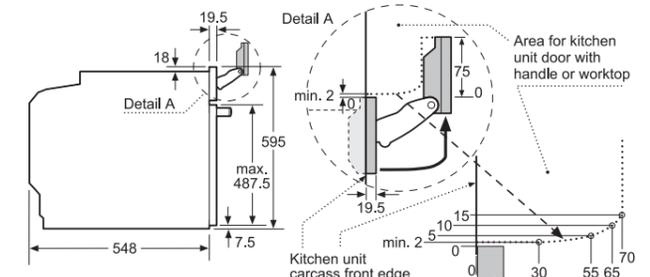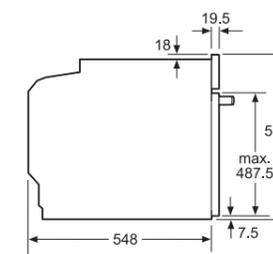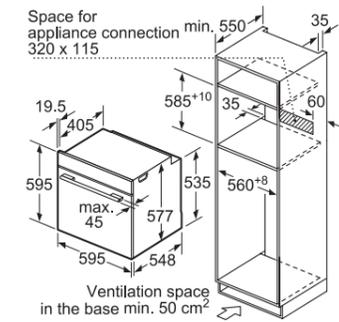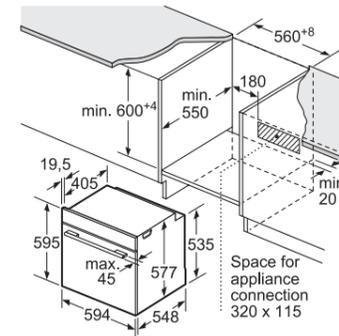

Note the pivoting range of the fascia.


Single ovens HN678GES6B and HS858GXB6B

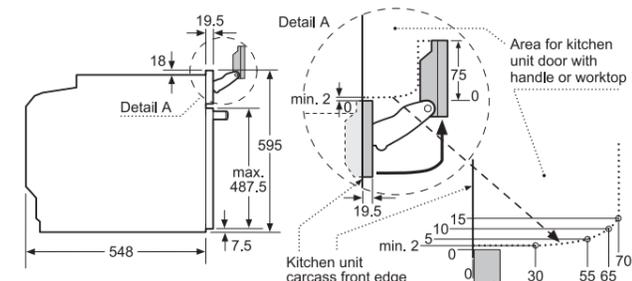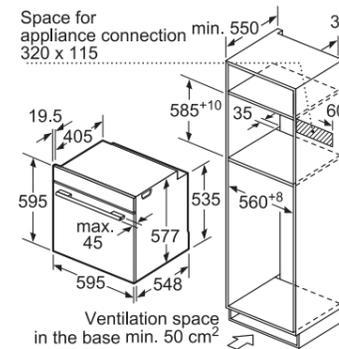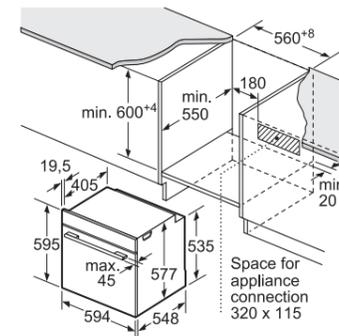


Note the pivoting range of the fascia.

# Oven technical diagrams


Single ovens HM678G4S6B, HB878GBB6B, HM676GOS6B, HB676GBS6B and HB656GBS6B

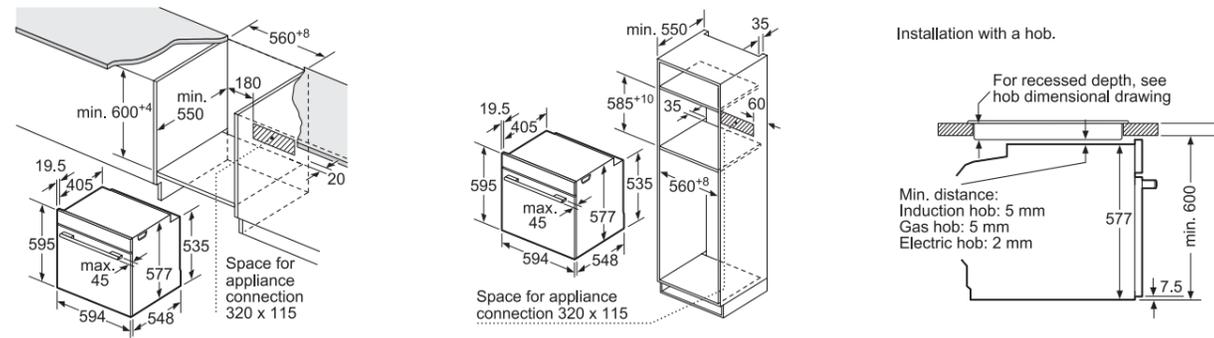


Single oven HM656GNS6B

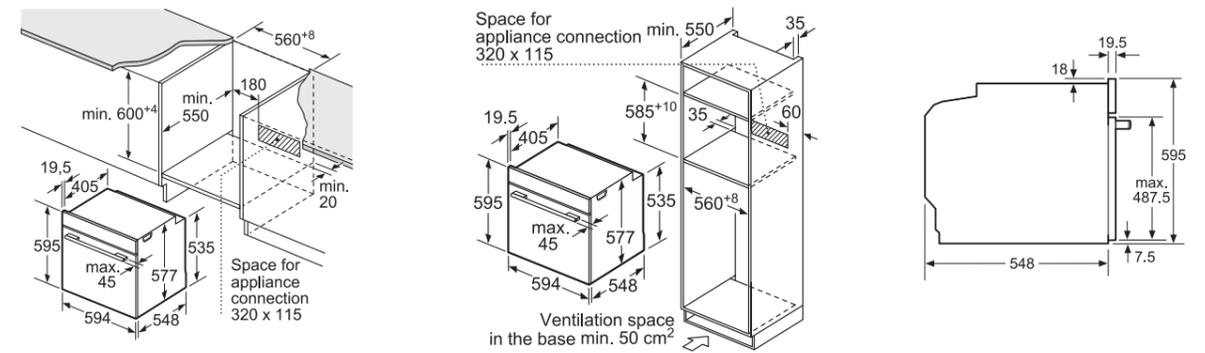


Single ovens HR678GES6B, HR676GBS6B and HS658GES6B

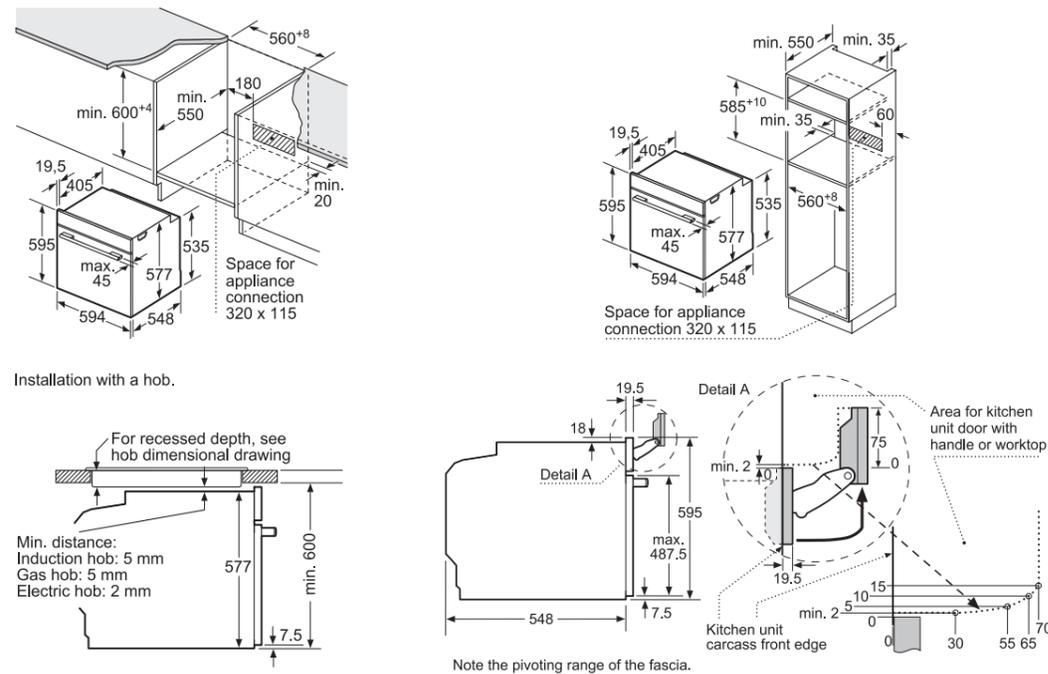

Single ovens HB478GCB0B, HB578G5S0B, HB578A0S0B, HB458GCB0B and HB535A0S0B

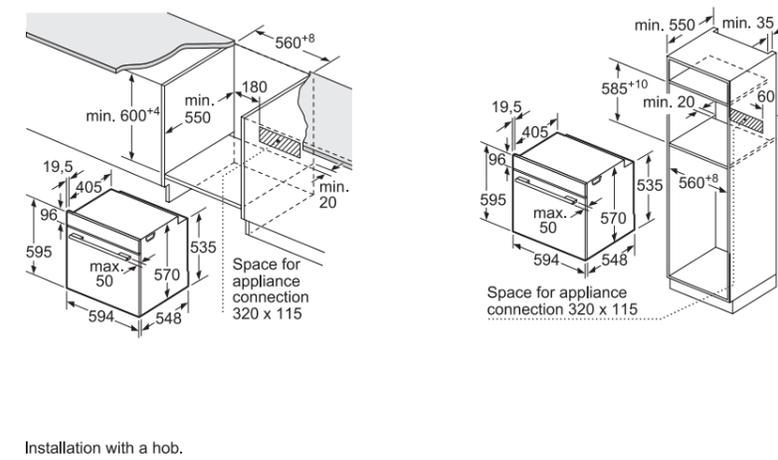


Single ovens HB678GBS6B, HB672GBS1B and HB632GBS1B

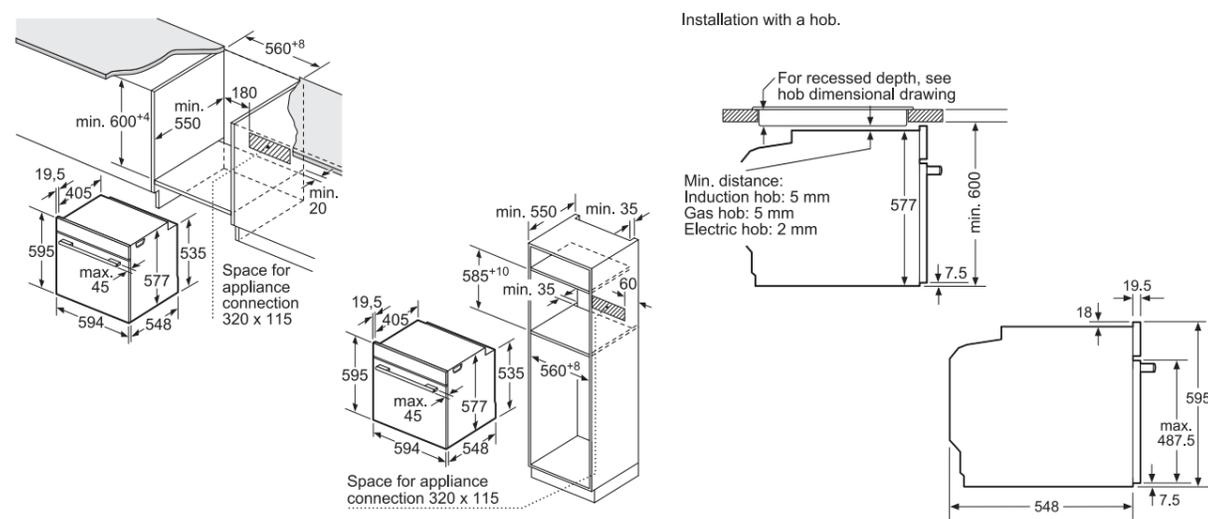


# Oven technical diagrams

Double ovens MB578G5S0B, MB557G5S0B and MB535A0S0B

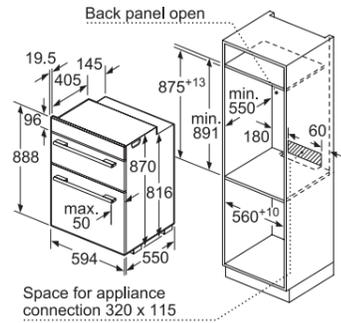


## Built-under double ovens NB535ABS0B



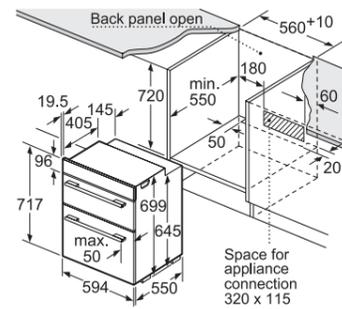


If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.



| Hob type                   | min. worktop thickness |       |
|----------------------------|------------------------|-------|
|                            | fitted                 | flush |
| Induction hob              | 39 mm                  | 40 mm |
| Full surface induction hob | 49 mm                  | 50 mm |
| Gas hob                    | 29 mm                  | 36 mm |
| Electric hob               | 29 mm                  | 32 mm |

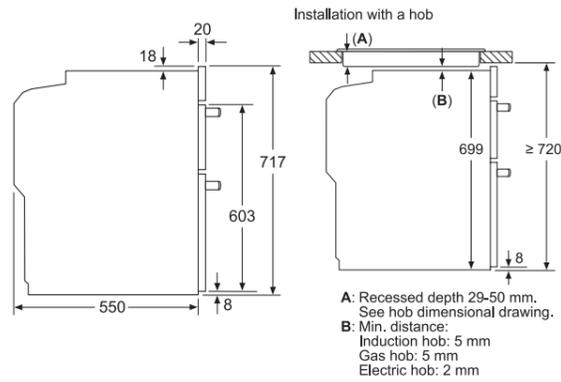



Compact ovens, compact steamers and compact microwave ovens CN878G4B6B, CM878G4B6B, CM676GBS6B, CM656GBS6B, CS858GRB7B, CS656GBS7B, CM633GBS1B and CD634GAS0B

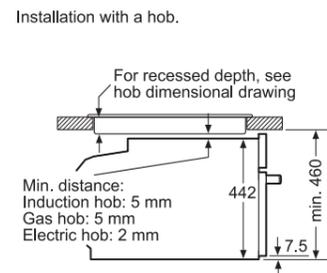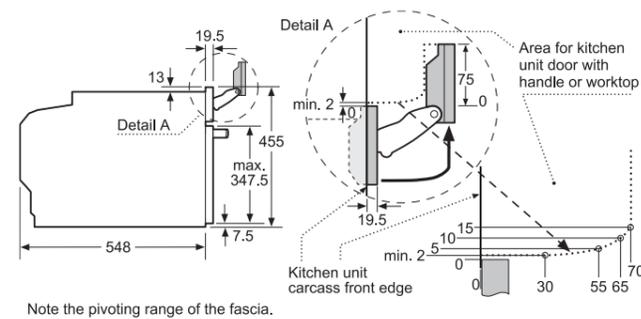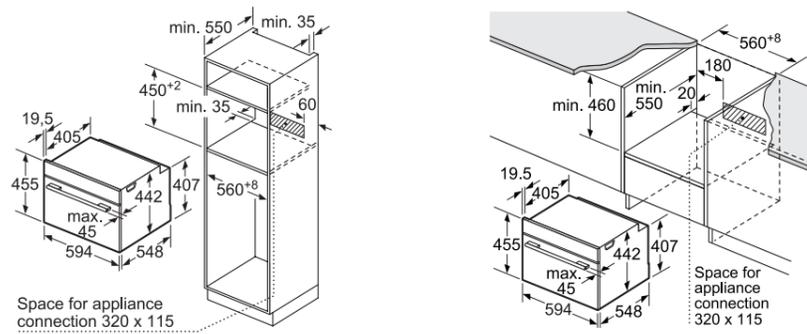





## Compact oven CM678G4S6B

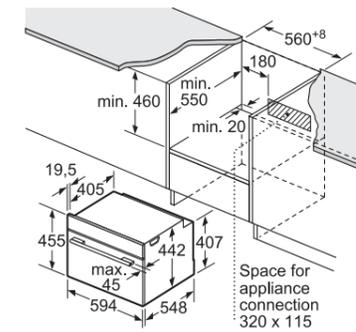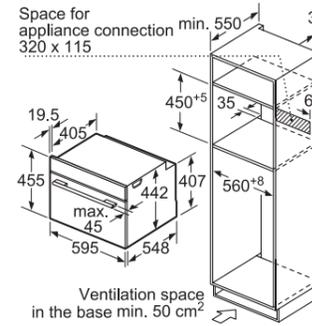

### Installation with a hob.

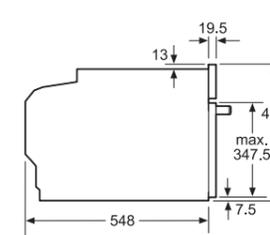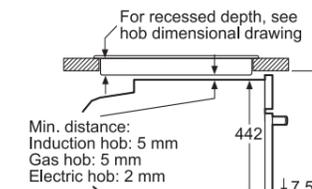


## Compact microwave combination with steam CP465AGB0B, CP565AGS0B

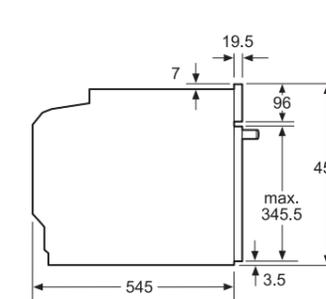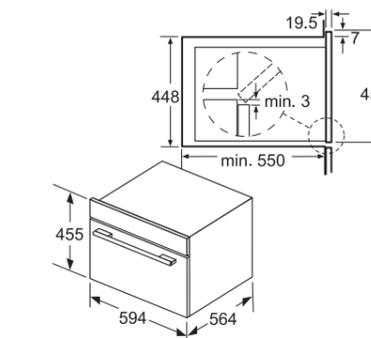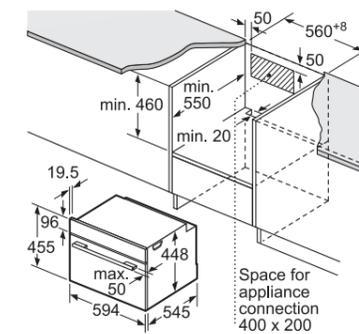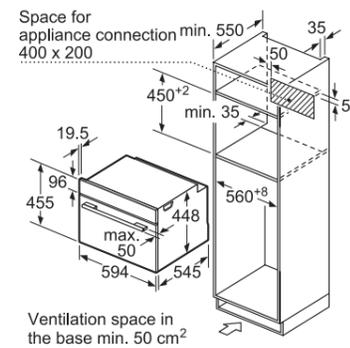


# Oven technical diagrams

## Microwave oven CF634AGS1B

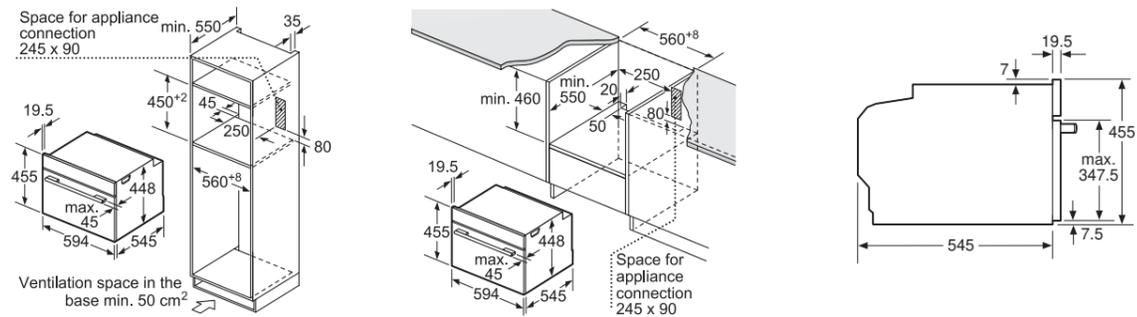


## Compact microwave combination CM585AMS0B

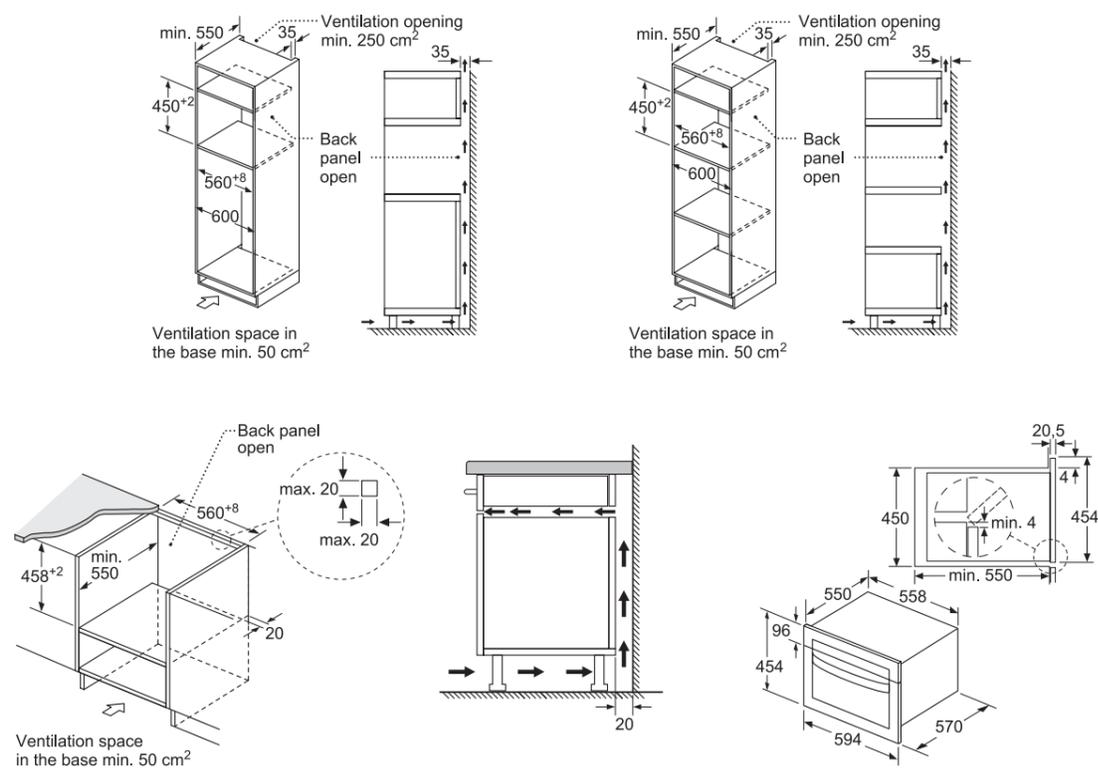


# Microwave oven technical diagrams


## Microwaves BE634LGS1B and BF634LGS1B

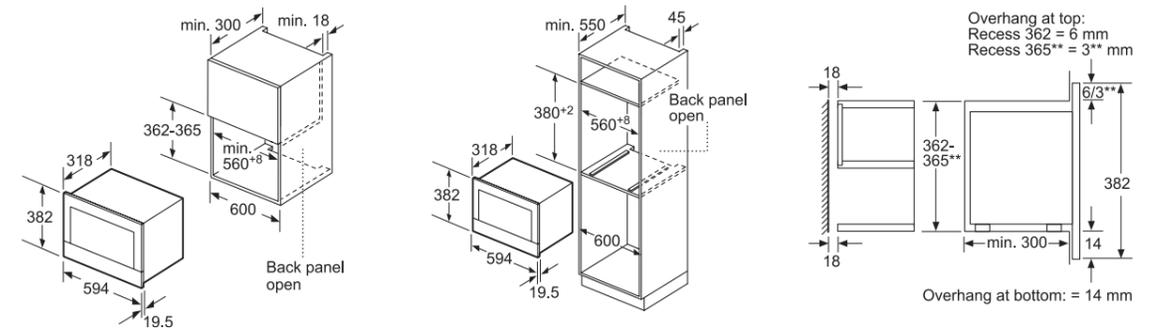

## Microwave BF555LMS0B

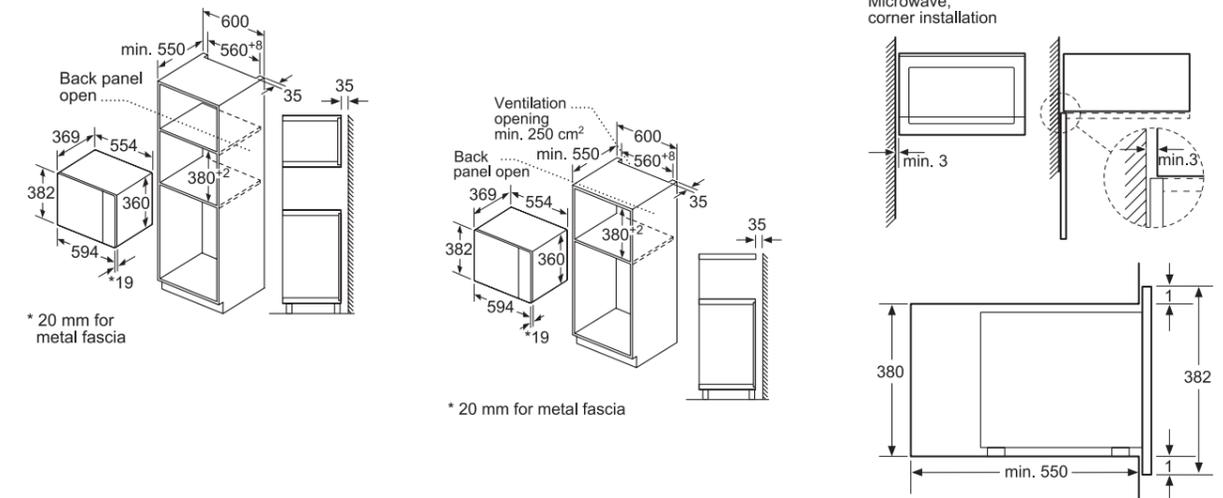


## Microwave BF525LMS0B


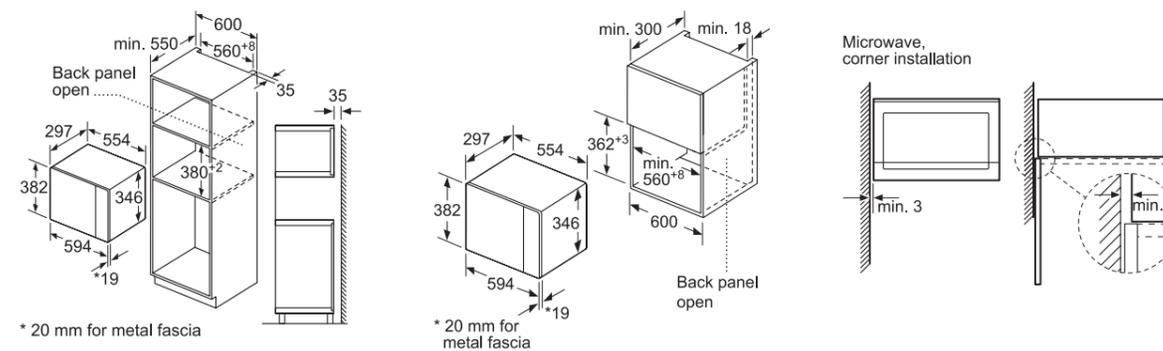


# Warming drawer technical diagrams


Warming drawer BI630DNS1B

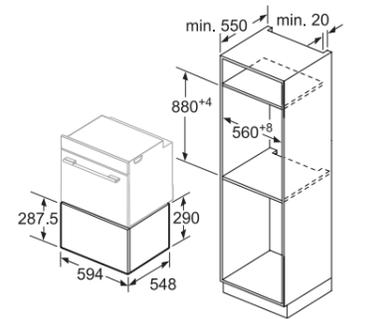

Warming drawer BV830ENB1B

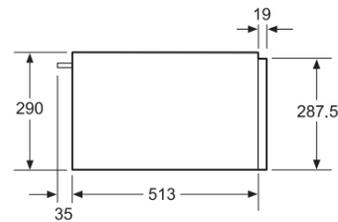
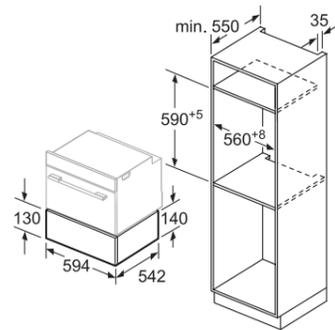


Ovens with an appliance height of 595 mm can be installed above a warming drawer. An intermediate floor is not required.

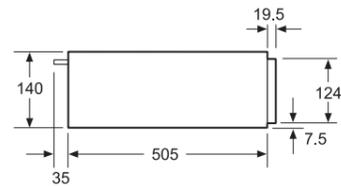



Compact ovens with an appliance height of 455 mm can be installed above a warming drawer. An intermediate floor is not required.

Warming drawers BI830CNB1B and BI630CNS1B

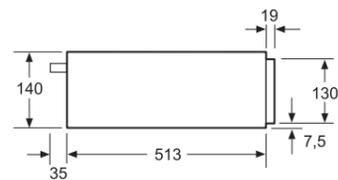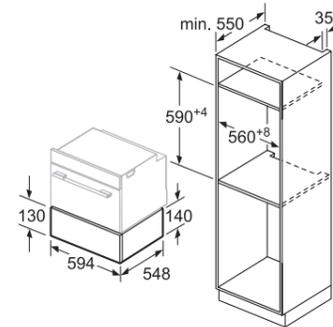

Ovens with an appliance height of 595 mm can be installed above a warming drawer. An intermediate floor is not required.



Warming drawer BI510CNR0B

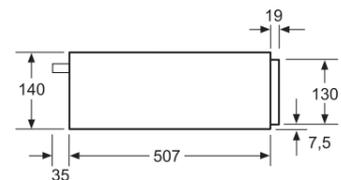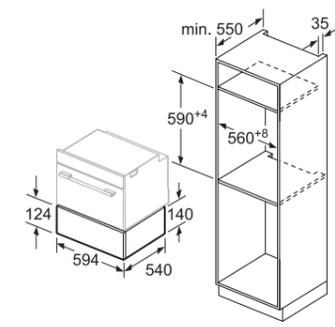

Compact ovens with an appliance height of 455 mm can be installed above a warming drawer. An intermediate floor is not required.


# Hob technical diagrams

Venting hob EX807LX33E

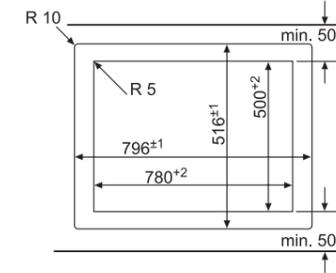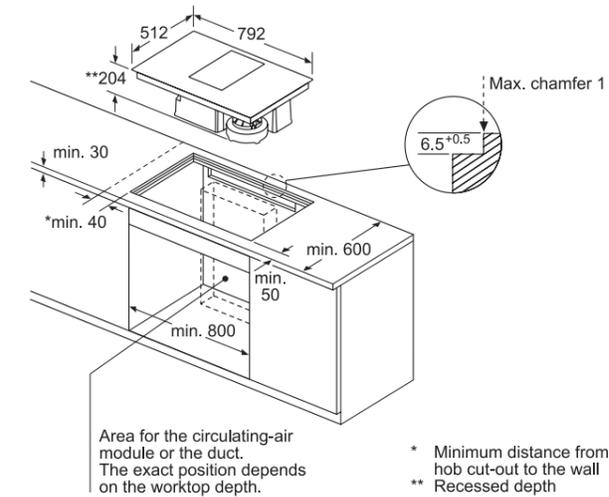


\* Minimum distance from the hob cut-out to the wall  
\*\* Recessed depth

Venting hob EX875LX34E

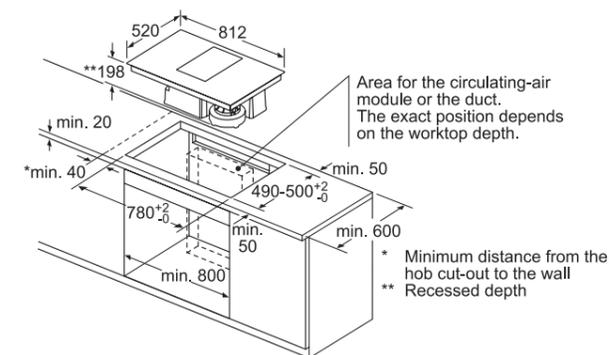

\* Minimum distance from the hob cut-out to the wall  
\*\* Recessed depth


Venting hob ED851FS11E

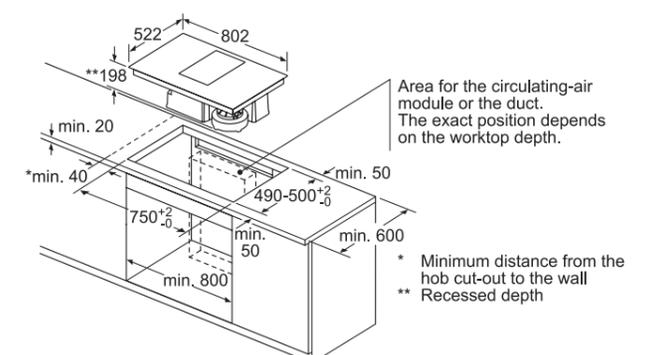

\* Minimum distance from the hob cut-out to the wall  
\*\* Recessed depth

## For all venting hobs


Below are diagrams for installation applicable to all venting hobs

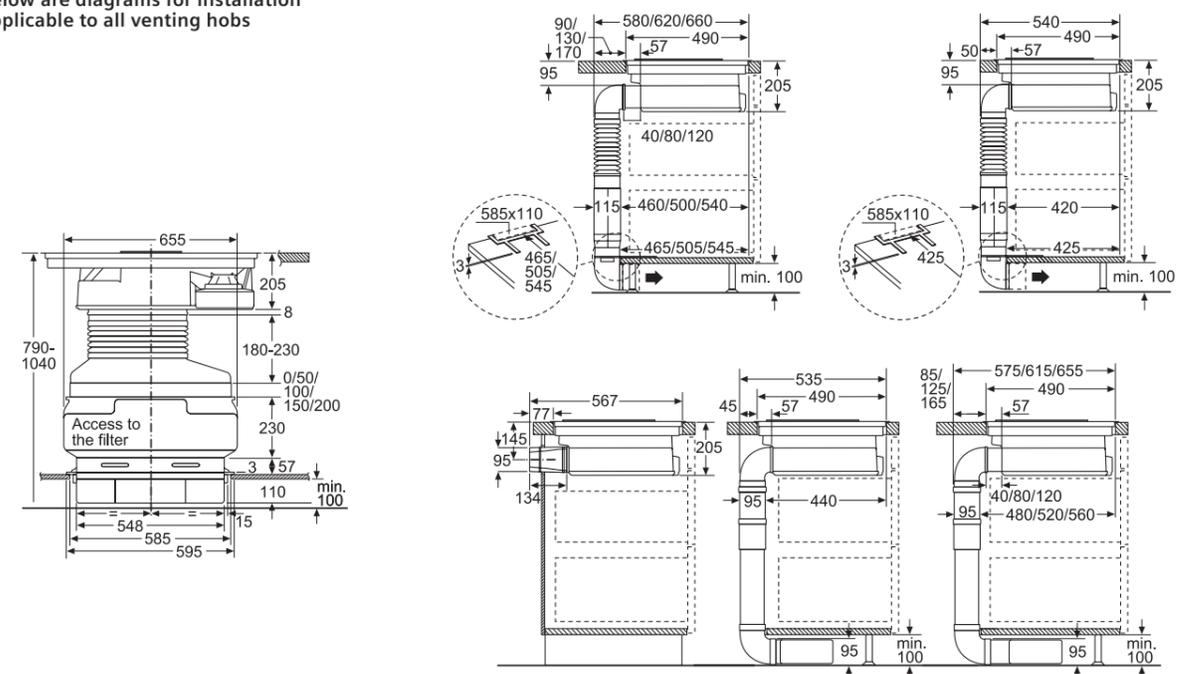




# Hob technical diagrams

## quickLite ceramic hob ET875FCP1D

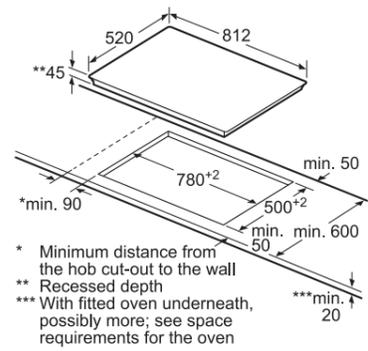


- \* Minimum distance from the hob cut-out to the wall
- \*\* Recessed depth
- \*\*\* With fitted oven underneath, possibly more; see space requirements for the oven

## quickLite hob ET651HE17E

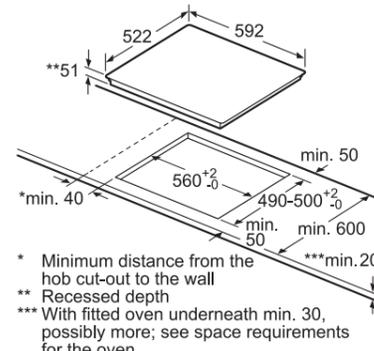


- \* Minimum distance from the hob cut-out to the wall
- \*\* Recessed depth
- \*\*\* With fitted oven underneath min. 30, possibly more; see space requirements for the oven

## Gas hob ER9A6SD70

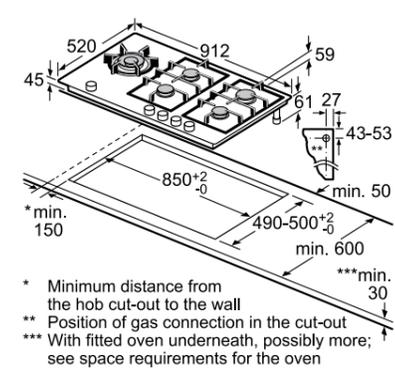


- \* Minimum distance from the hob cut-out to the wall
- \*\* Position of gas connection in the cut-out
- \*\*\* With fitted oven underneath, possibly more; see space requirements for the oven

## Gas hob ER7A6RD70

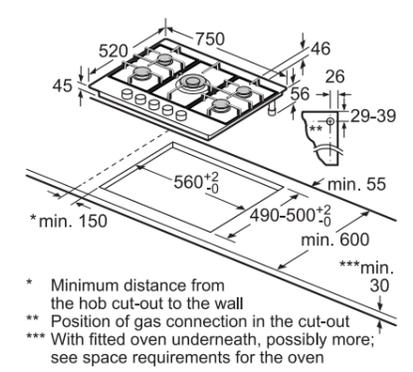


- \* Minimum distance from the hob cut-out to the wall
- \*\* Position of gas connection in the cut-out
- \*\*\* With fitted oven underneath, possibly more; see space requirements for the oven

## quickLite ceramic hob ET645CEA1E

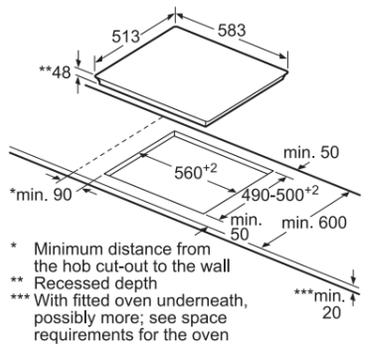


- \* Minimum distance from the hob cut-out to the wall
- \*\* Recessed depth
- \*\*\* With fitted oven underneath, possibly more; see space requirements for the oven

## Gas hob ER6A6PD70

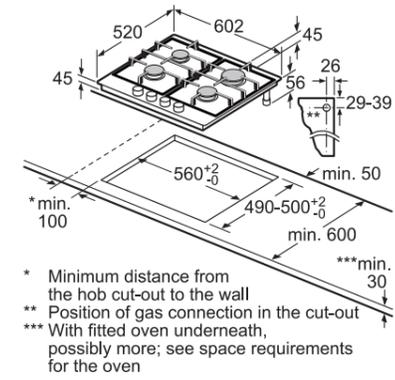

- \* Minimum distance from the hob cut-out to the wall
- \*\* Position of gas connection in the cut-out
- \*\*\* With fitted oven underneath, possibly more; see space requirements for the oven


## Gas hob EP9A6SB90

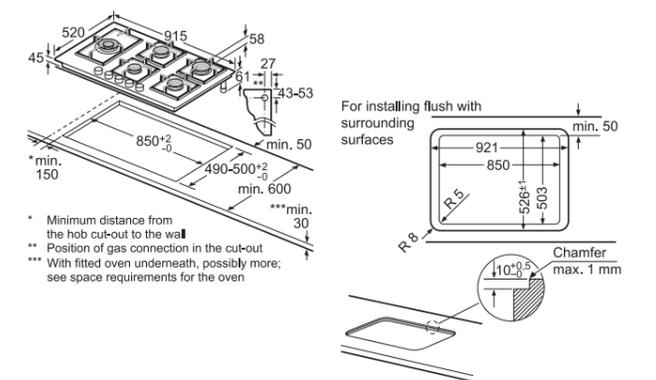


- \* Minimum distance from the hob cut-out to the wall
- \*\* Position of gas connection in the cut-out
- \*\*\* With fitted oven underneath, possibly more; see space requirements for the oven

## For all flexInduction, induction and quickLite ceramic hobs

Below are diagrams for installation applicable to all flexInduction, induction and quickLite ceramic hobs

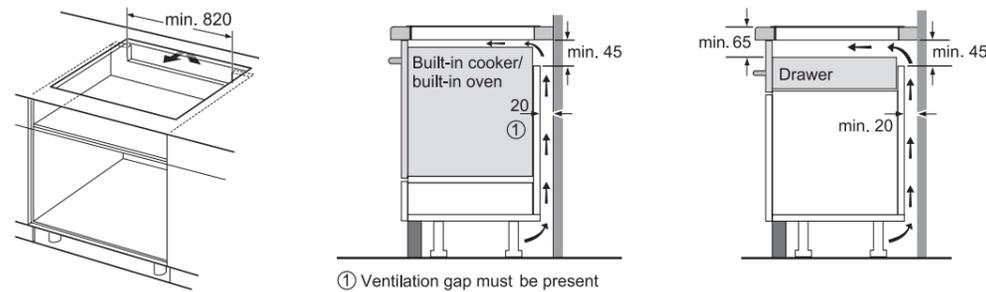


## Gas hob EP7A6QB90

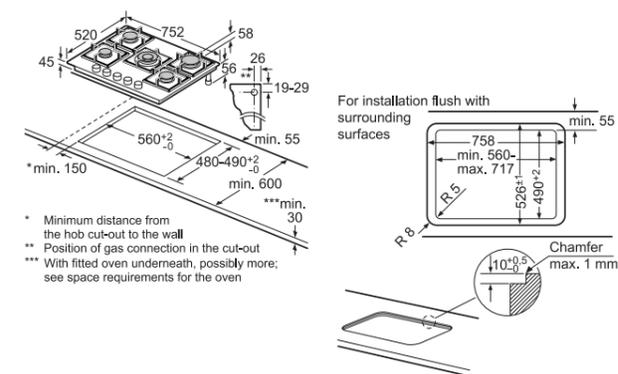

- \* Minimum distance from the hob cut-out to the wall
- \*\* Position of gas connection in the cut-out
- \*\*\* With fitted oven underneath, possibly more; see space requirements for the oven


## Gas hob EP6A6HB20

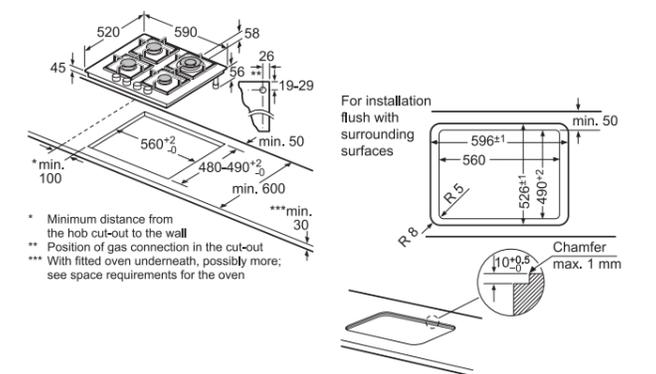


- \* Minimum distance from the hob cut-out to the wall
- \*\* Position of gas connection in the cut-out
- \*\*\* With fitted oven underneath, possibly more; see space requirements for the oven

# Hob technical diagrams


## Gas hob EC9A5SB90

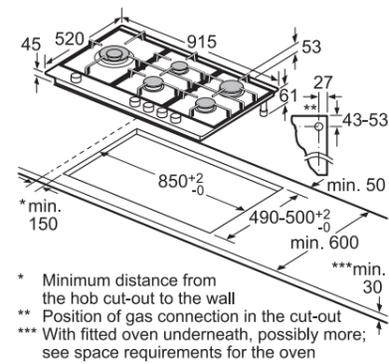


## Gas hobs EC7A5RB90, EC7A5QB90 and EG7B5QB90

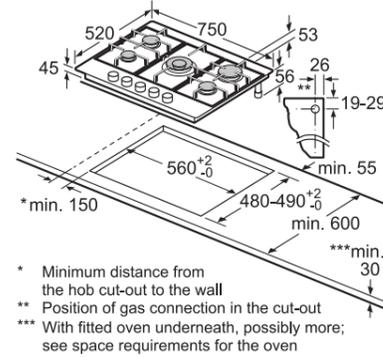


## Teppan yaki domino hob ET475FYB1E

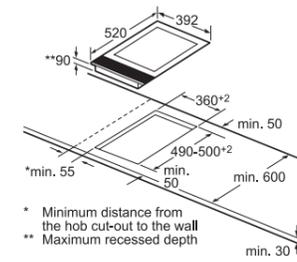


## flexInduction domino hob EX375FXB1E

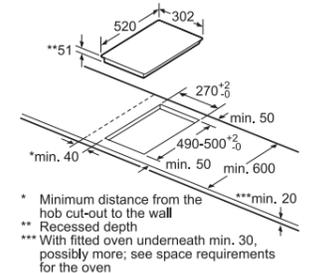


## Gas hob EC715RB90E

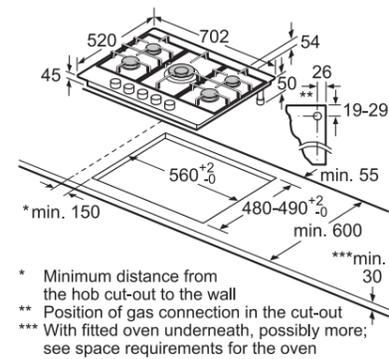


## Gas hobs EC6A5IB90, EC6A5HC90, EC6A5PB90, EG6B5HB60 and EG6B5PB60

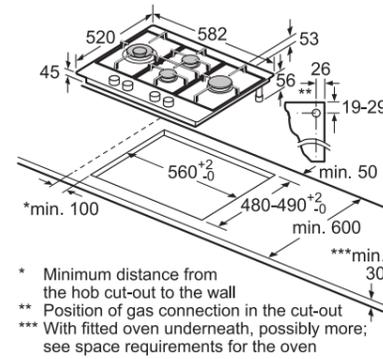


## Wok domino gas hob ER3A6AD70

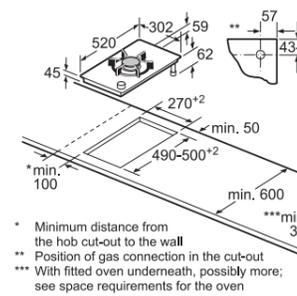

## Domino gas hob ER3A6BD70

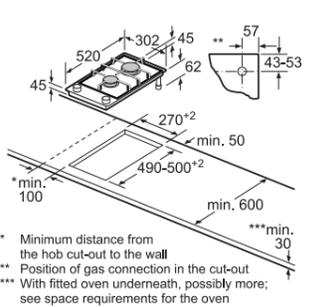


## Gas hobs EB6B5HB60 and EB6B5PB60

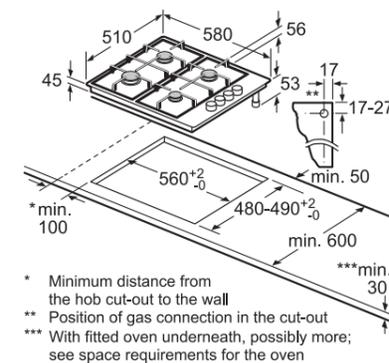

## Domino hob combination installation

Below are diagrams showing the possible combinations for installing your Domino hob

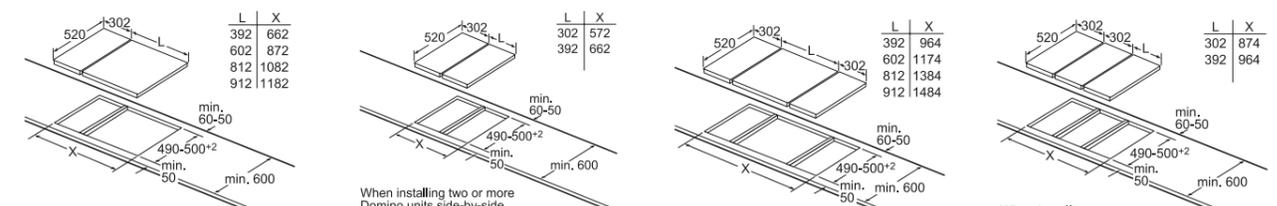

When installing a Domino unit right next to a hob, an assembly kit (HZ394301) is required.

When installing two or more Domino units side-by-side, one or more assembly kits are required (2 units = 1 assembly kit, 3 units = 2 assembly kits, etc.).

When installing two Domino units right next to a hob, two assembly kits (HZ394301) are required.

When installing two or more Domino units side-by-side, one or more assembly kits are required (2 units = 1 assembly kit, 3 units = 2 assembly kits, etc.).

Domino combination possibilities with corresponding device and cutout dimensions


| Width type:      | 30  | 40  | 60  | 70  | 80  | 90        |
|------------------|-----|-----|-----|-----|-----|-----------|
| Device width:    | 302 | 392 | 602 | 710 | 812 | 912       |
|                  | A   | B   | C   | D   | L   | X         |
| 2x30             |     |     |     |     |     | 604 572   |
| 1x30, 1x40       |     |     |     |     |     | 694 662   |
| 1x30, 1x60       |     |     |     |     |     | 904 872   |
| 1x30, 1x70       |     |     |     |     |     | 1012 980  |
| 1x30, 1x80       |     |     |     |     |     | 1114 1082 |
| 1x30, 1x90       |     |     |     |     |     | 1214 1182 |
| 2x40             |     |     |     |     |     | 784 752   |
| 1x40, 1x60       |     |     |     |     |     | 994 962   |
| 1x40, 1x70       |     |     |     |     |     | 1102 1070 |
| 1x40, 1x80       |     |     |     |     |     | 1204 1172 |
| 1x40, 1x90       |     |     |     |     |     | 1304 1272 |
| 3x30             |     |     |     |     |     | 906 874   |
| 2x30, 1x40       |     |     |     |     |     | 996 964   |
| 2x30, 1x60       |     |     |     |     |     | 1206 1174 |
| 2x30, 1x70       |     |     |     |     |     | 1314 1282 |
| 2x30, 1x80       |     |     |     |     |     | 1416 1384 |
| 2x30, 1x90       |     |     |     |     |     | 1516 1484 |
| 1x30, 2x40       |     |     |     |     |     | 1086 1054 |
| 1x30, 1x40, 1x60 |     |     |     |     |     | 1296 1264 |
| 1x30, 1x40, 1x70 |     |     |     |     |     | 1404 1372 |
| 1x30, 1x40, 1x80 |     |     |     |     |     | 1506 1474 |
| 1x30, 1x40, 1x90 |     |     |     |     |     | 1606 1574 |
| 3x40             |     |     |     |     |     | 1176 1144 |
| 2x40, 1x60       |     |     |     |     |     | 1386 1354 |
| 4x30             |     |     |     |     |     | 1208 1176 |
| 3x30, 1x40       |     |     |     |     |     | 1298 1266 |
| 2x30, 2x40       |     |     |     |     |     | 1388 1356 |
| 1x30, 3x40       |     |     |     |     |     | 1478 1446 |

Assembly kit (HZ394301) for Domino

\* Dependent on the cut-out depth


# Hood technical diagrams

## Ceiling hood LR18HLT25

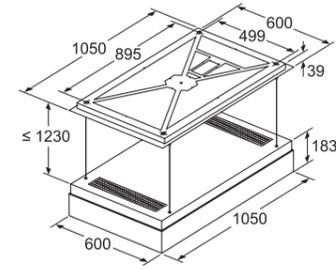

## Ceiling hood LR29CQS25B


The fan outlet can be turned in all four directions

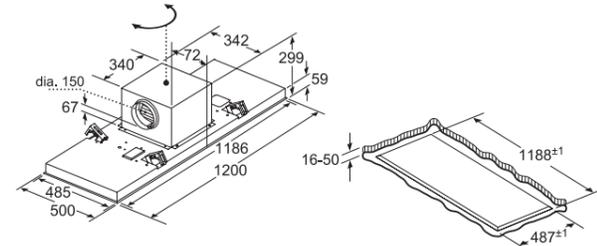

Never fit directly onto plasterboard or similar lightweight construction materials of the suspended ceiling. A suitable substructure is required that is securely fixed to the concrete ceiling.


## Ceiling hood LR99CQS25B, LR97CBS25B and LR97CAQ50B

The fan outlet can be turned in all four directions

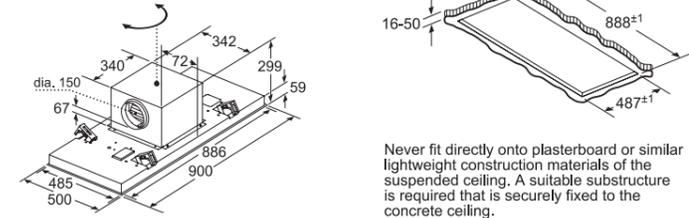


Never fit directly onto plasterboard or similar lightweight construction materials of the suspended ceiling. A suitable substructure is required that is securely fixed to the concrete ceiling.


## downDraft hoods LD97DBM60B and LD97DBM69B

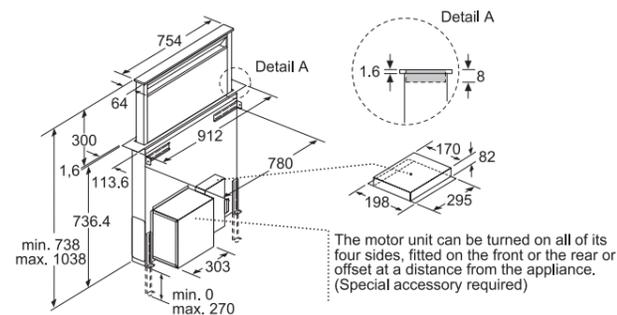


The motor unit can be turned on all of its four sides, fitted on the front or the rear or offset at a distance from the appliance. (Special accessory required)

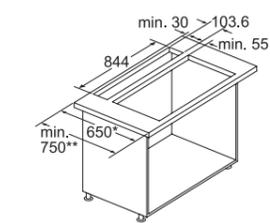


Use with gas hob only possible in air extraction mode. Maximum total power 13.4 kW  
\* 650 mm depth only in combination with slim hobs.  
\*\* min. 750 mm for hobs with 500 mm cut-out depth.

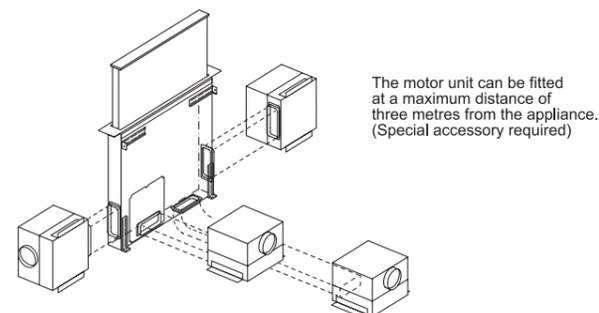

The motor unit can be fitted at a maximum distance of three metres from the appliance. (Special accessory required)

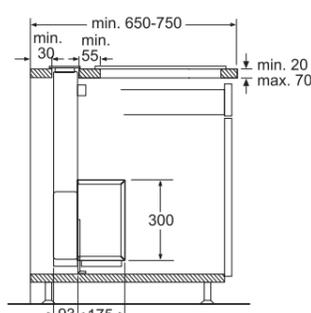


## Island cube hood LF311VV60

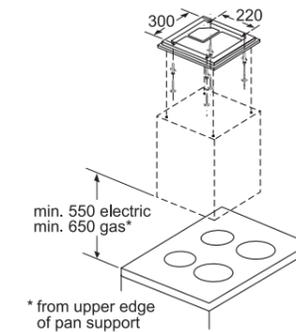


min. 550 electric  
min. 650 gas\*

\* from upper edge of pan support

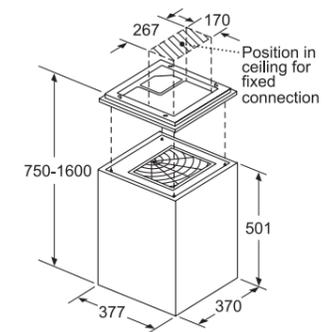


Position in ceiling for fixed connection

## Island chimney hood LF91BUV50B

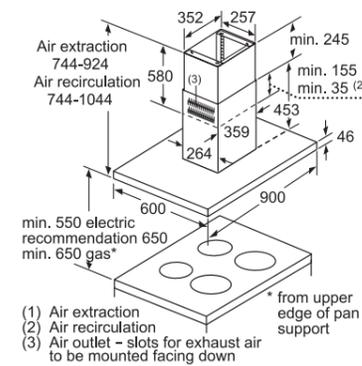


min. 550 electric recommendation 650  
min. 650 gas\*

\* from upper edge of pan support

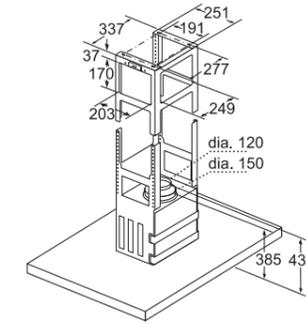


height-adjustable in 20 mm increments (744-1044)

## Island chimney hood LF97GBM50B

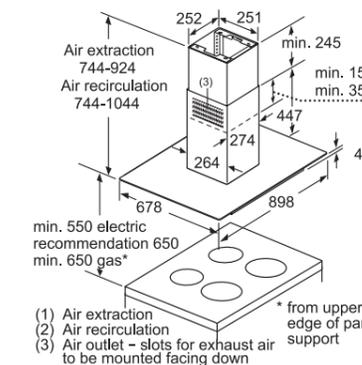

min. 550 electric recommendation 650  
min. 650 gas\*


\* from upper edge of pan support

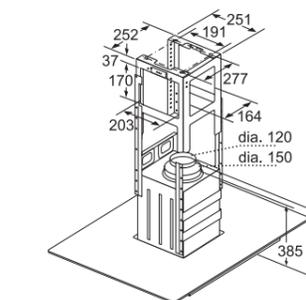


height-adjustable in 20 mm increments (744-1044)

# Hood technical diagrams


## Angled chimney hoods LC91KWW69B and LC91KWW60B

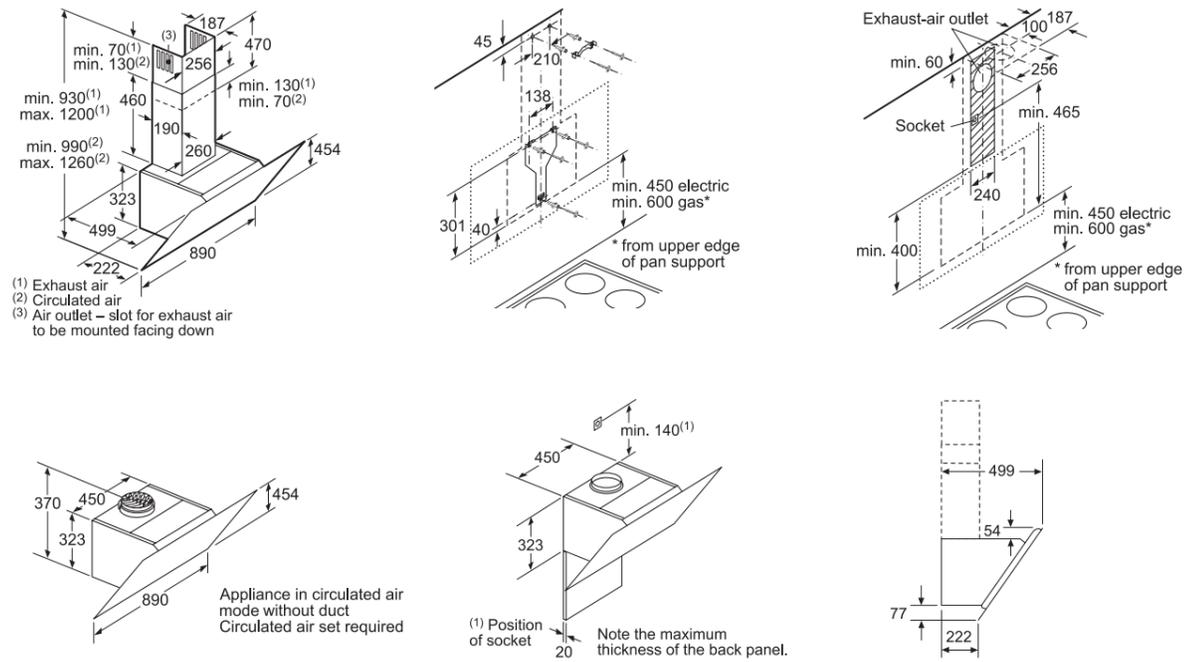


## Angled chimney hoods LC87KHM60B and LC67KHM60B

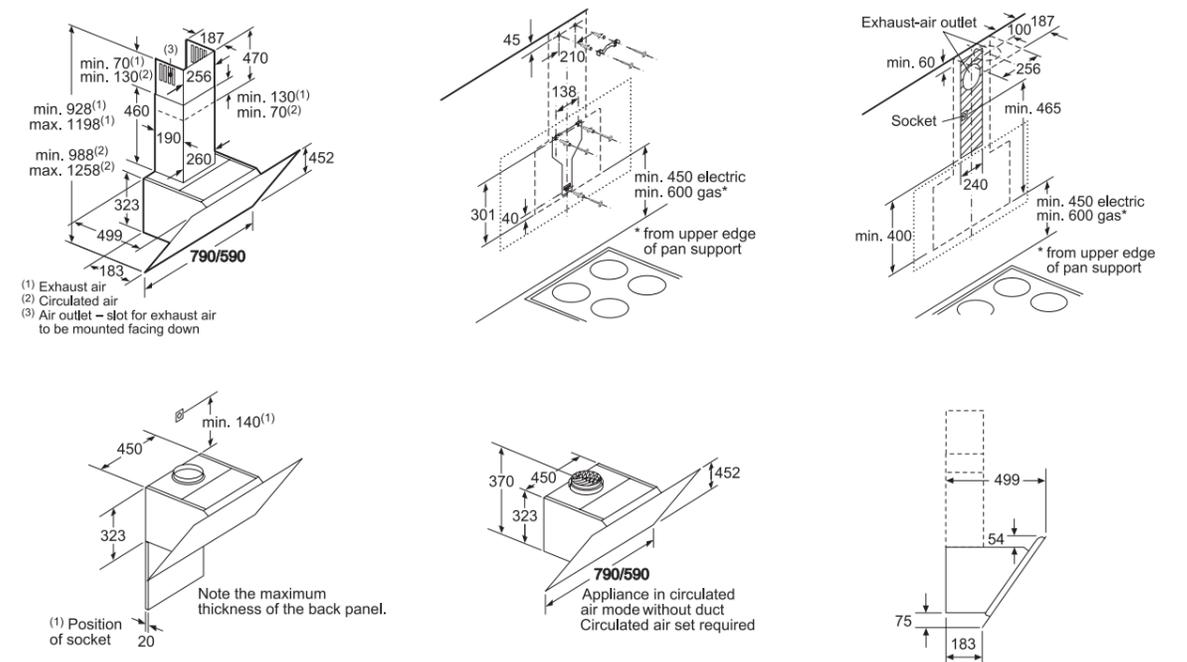

## Angled chimney hood LC87KBM60B

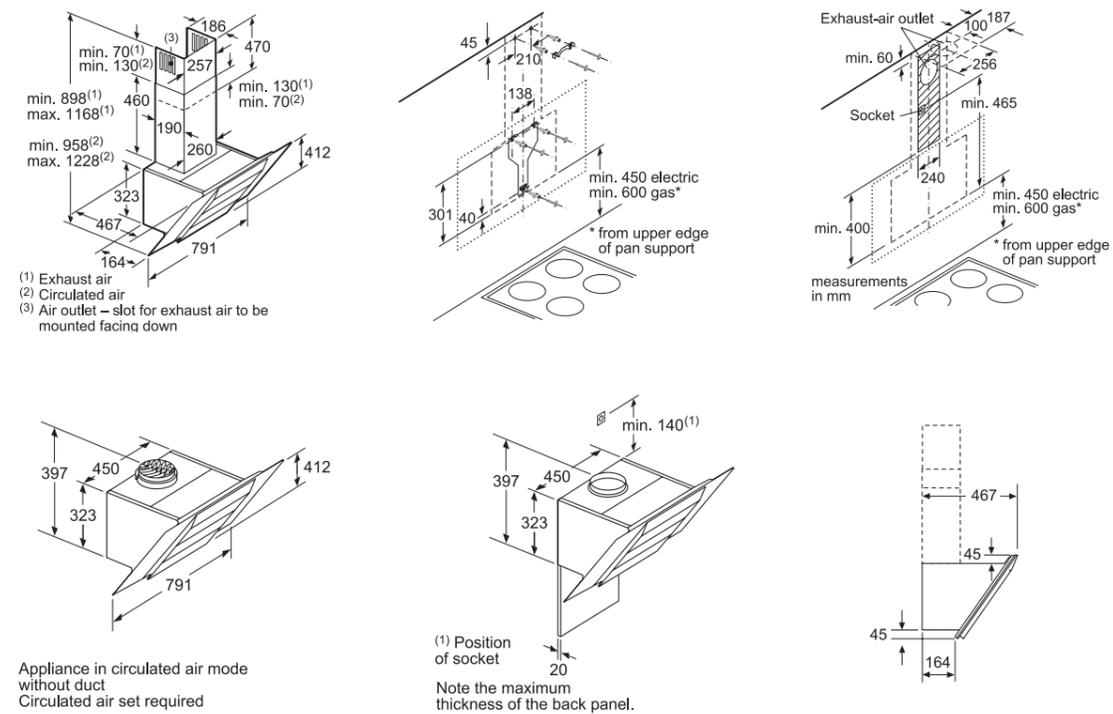


## Flat chimney hood LC97FW69B

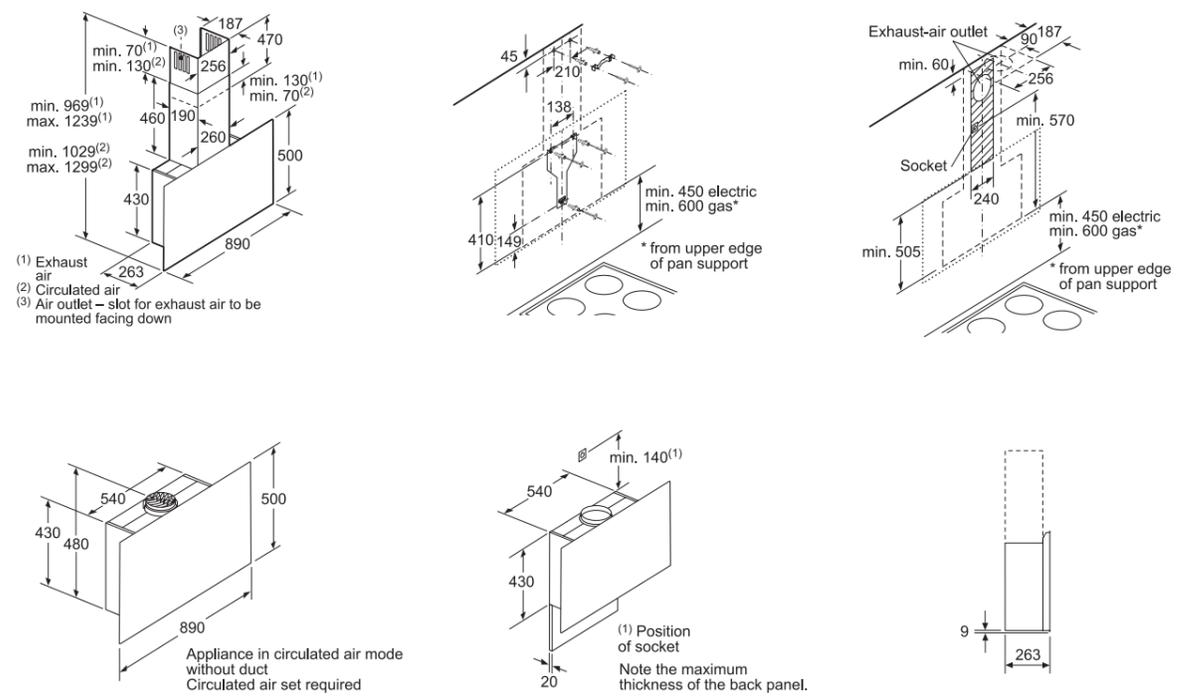


# Hood technical diagrams


## Straight glass chimney hoods LC97GHM50B and LC67GHM50B

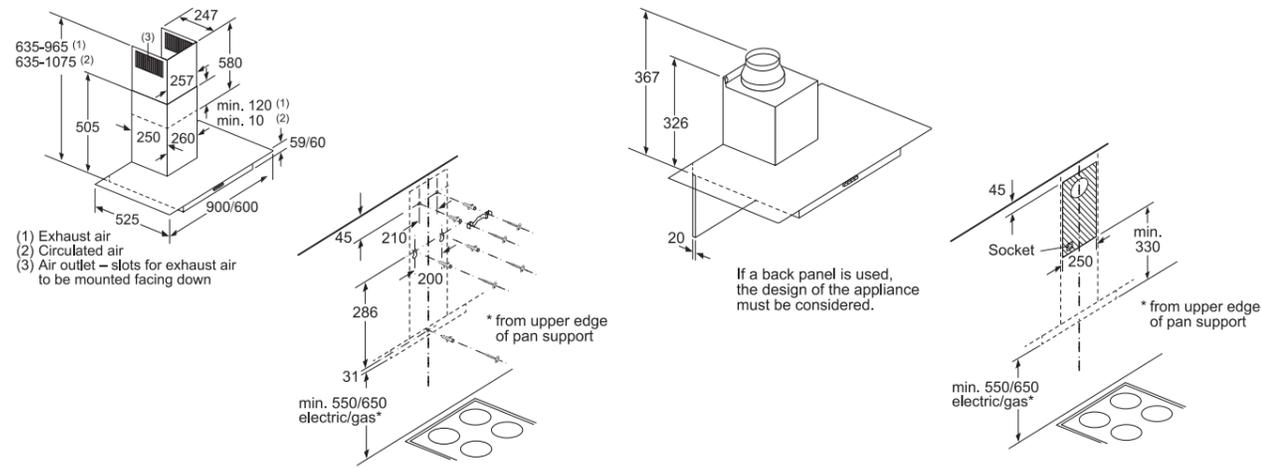


## Box chimney hoods LC97BHM50B, LC77BHM50B and LC67BHM50B

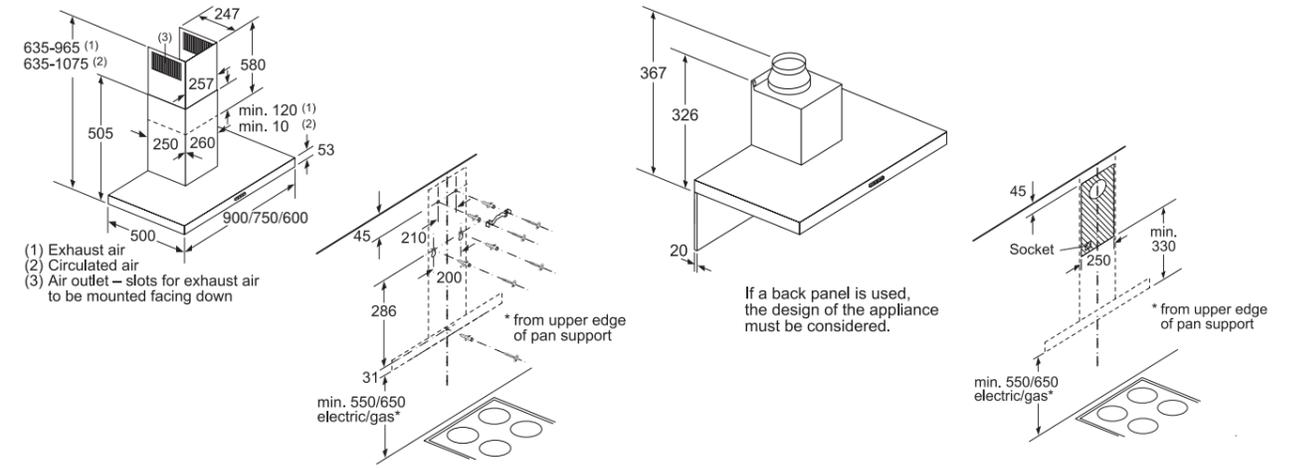


## Curved glass chimney hoods LC97AFM50B and LC67AFM50B

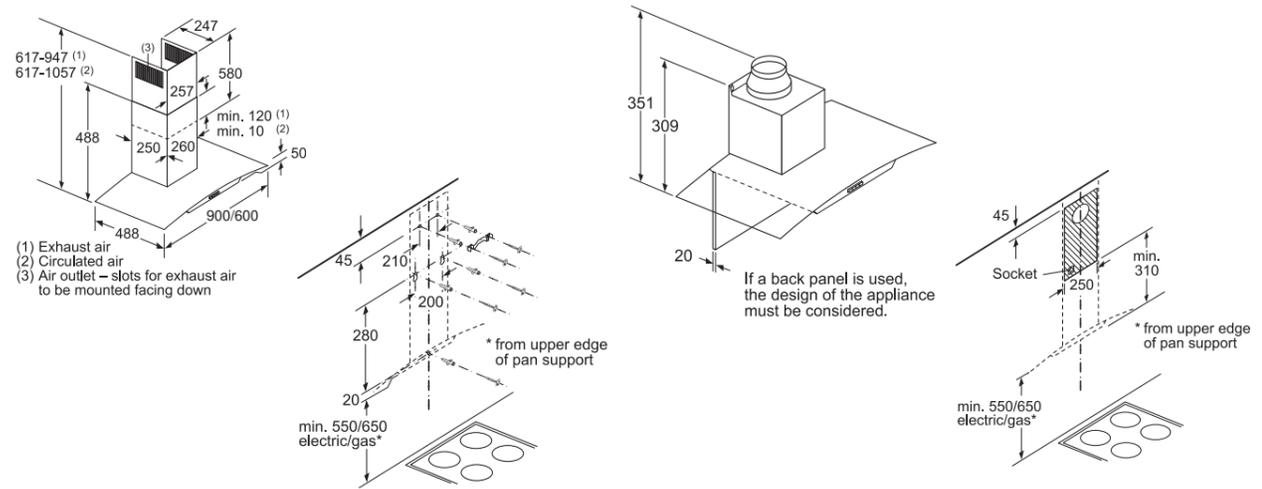


## Box chimney hoods LC94BBC50B and LC64BBC50B

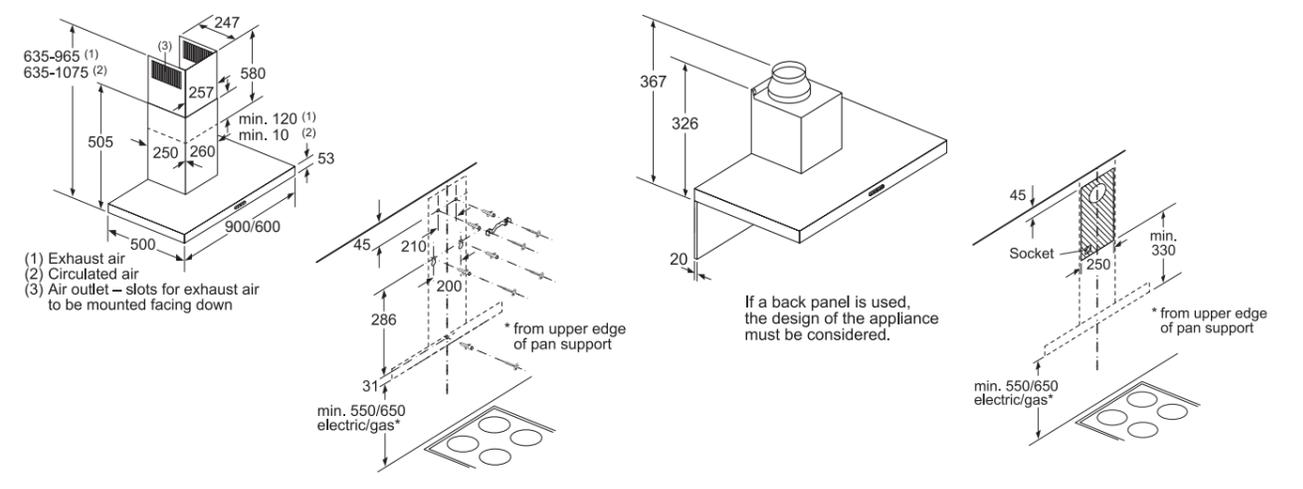

## Box chimney hood LC91BUV50B

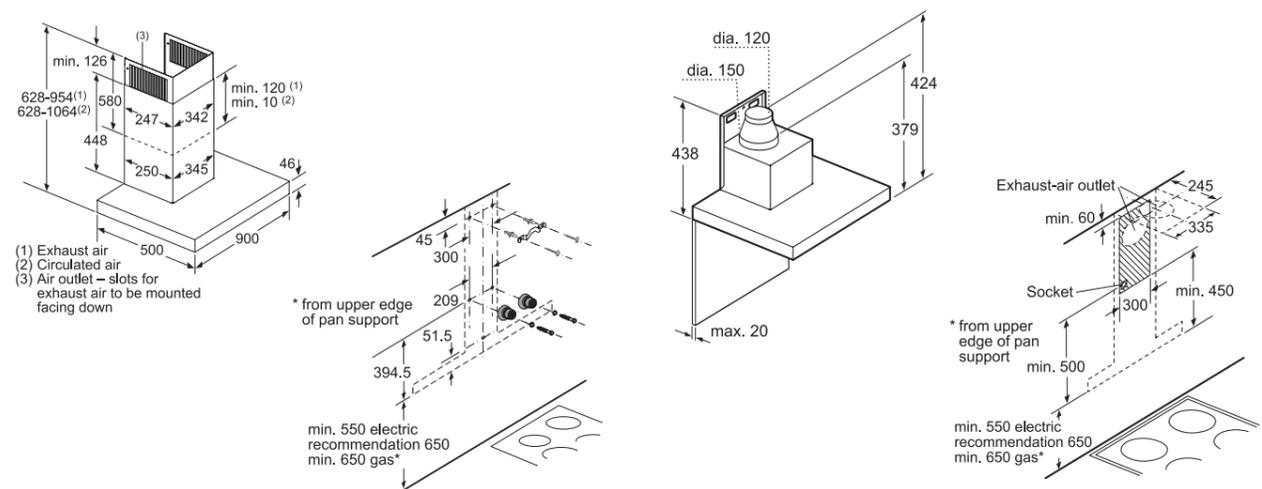


## Slim pyramid chimney hoods LC97QFM50B and LC67QFM50B

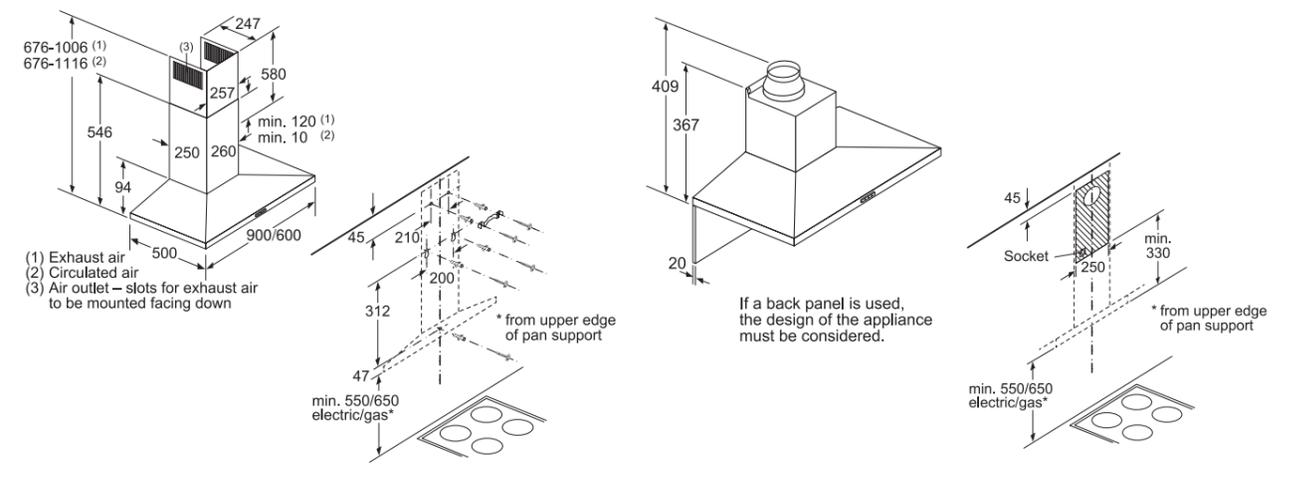


# Hood technical diagrams


## Pyramid chimney hoods LC94PBC50B and LC64PBC50B

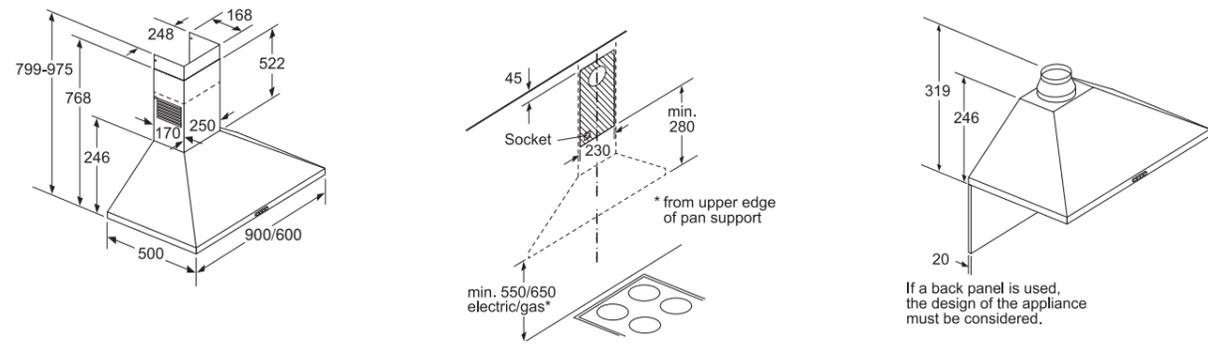


## Telescopic hoods LI97SA560B and LI67SA560B

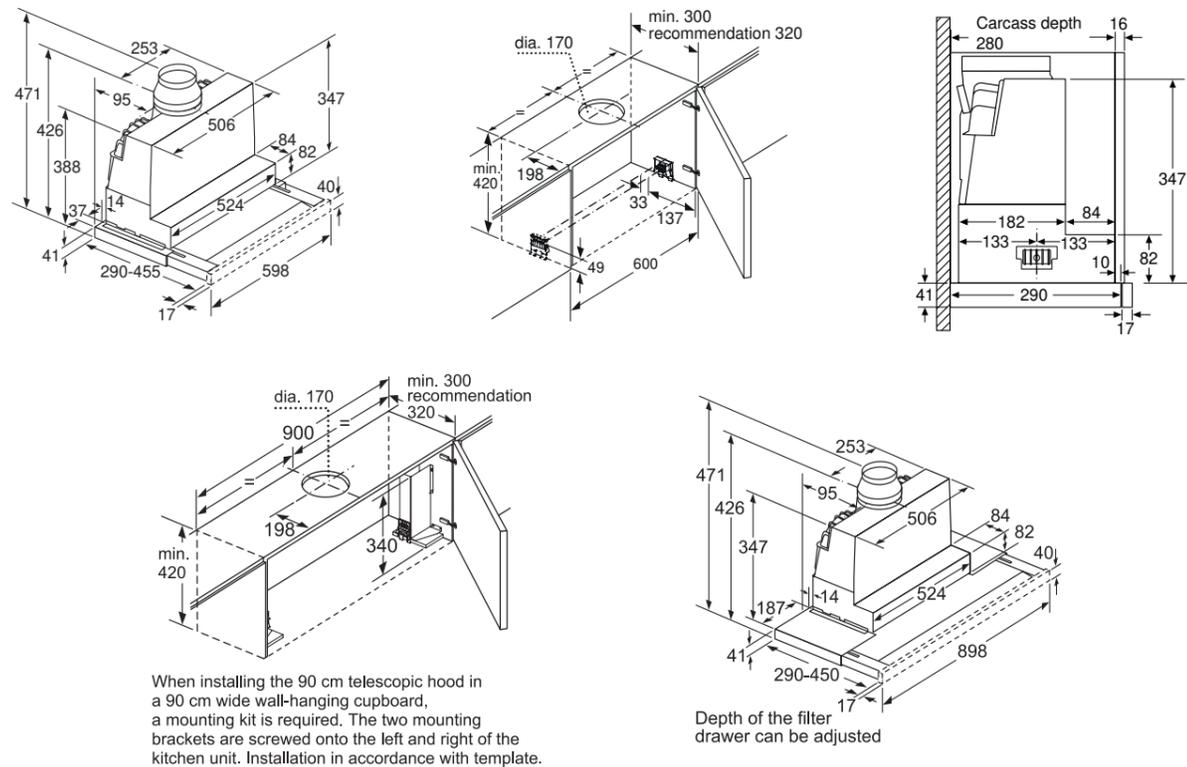


## Telescopic hoods LI94MA530B and LI64MA530B

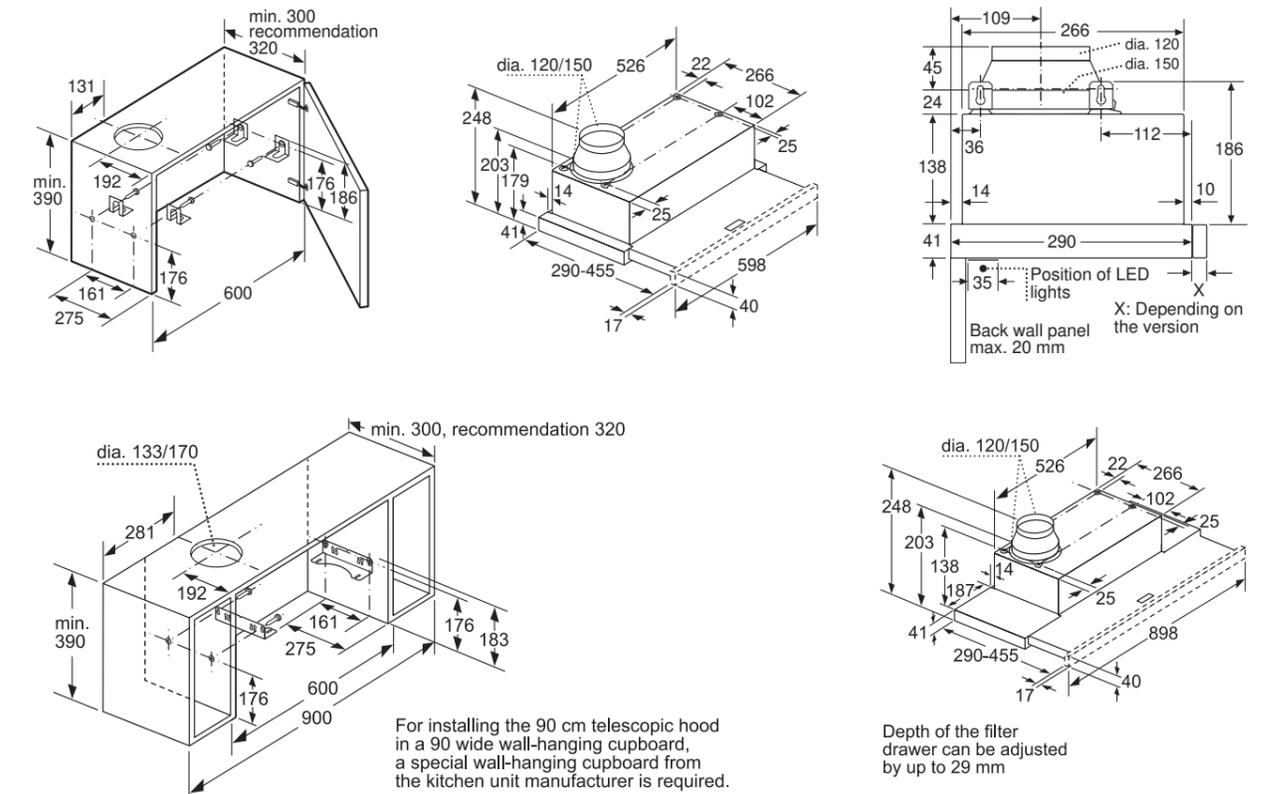

## Canopy hoods LB79585MGB and LB78574GB

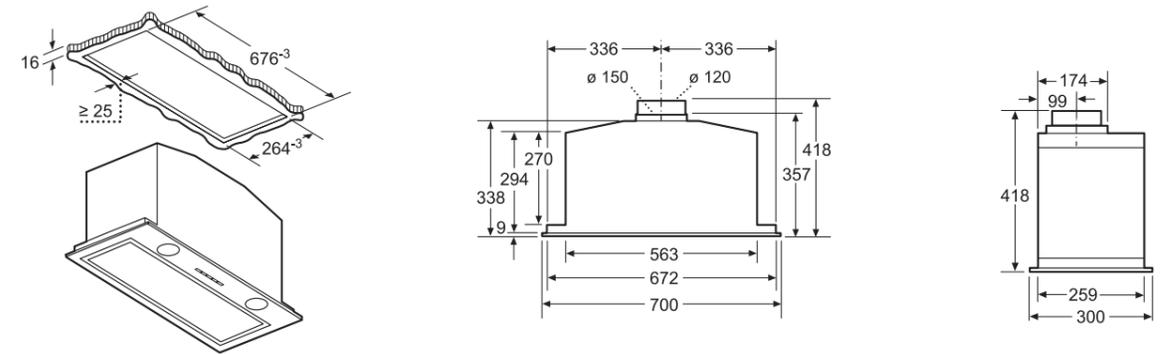


## Canopy hood LB57574GB

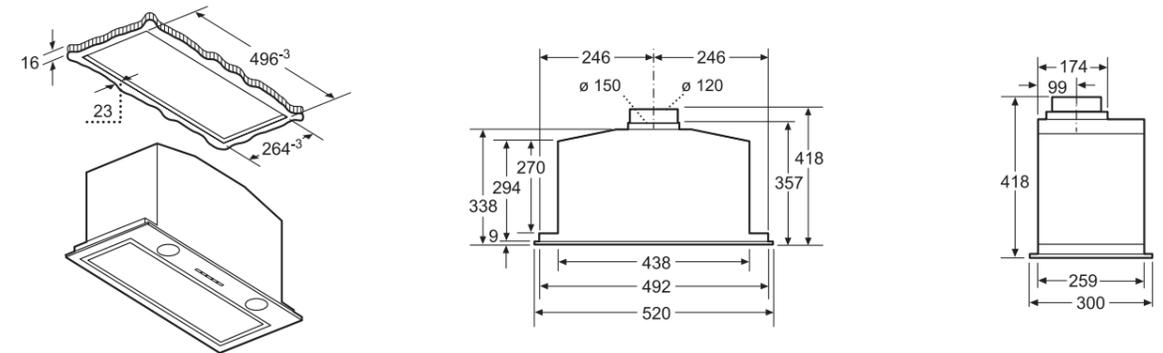


# Hood technical diagrams


## Canopy hood LB75565GB

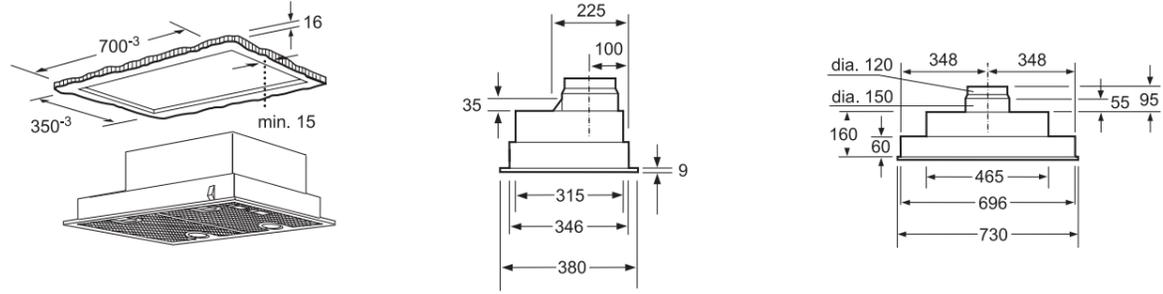


## Canopy hood LB55565GB

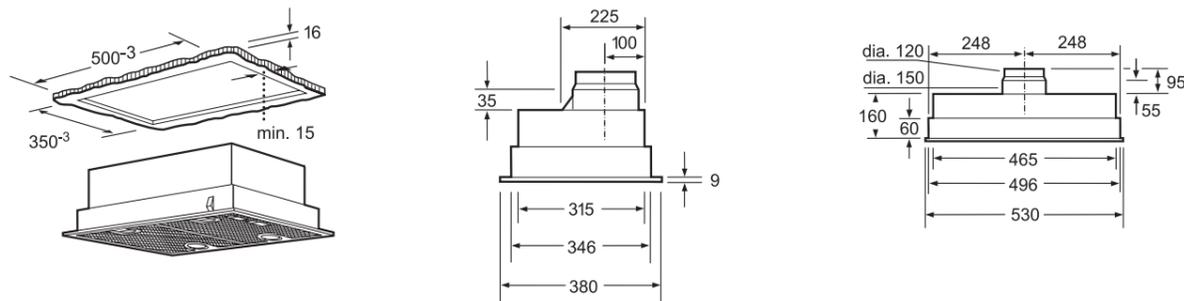

## Canopy hood LB53NAA30B

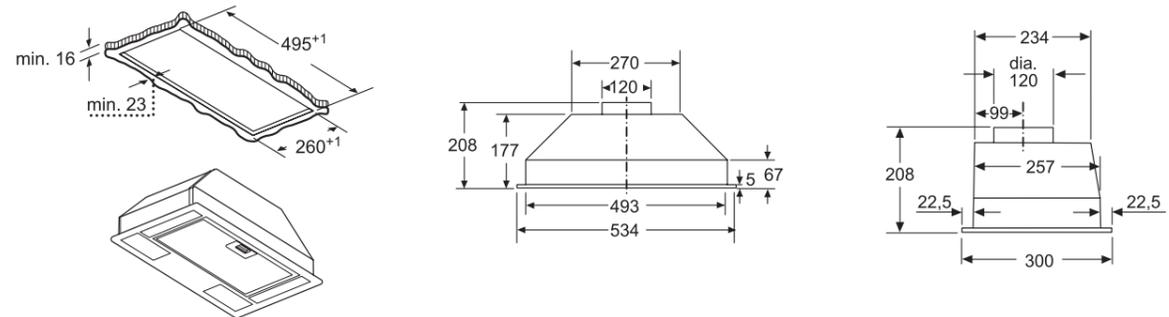


## Integrated hoods LE66MAC00B and LE63MAC00B

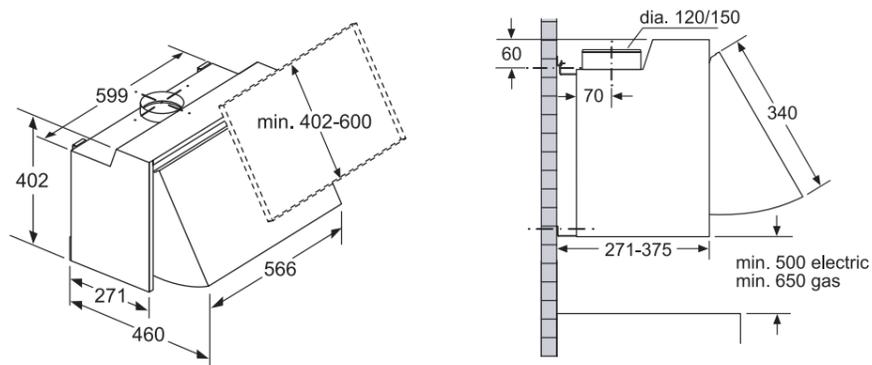


# Cooling technical diagrams


## aCool fridge freezer CI36TP02

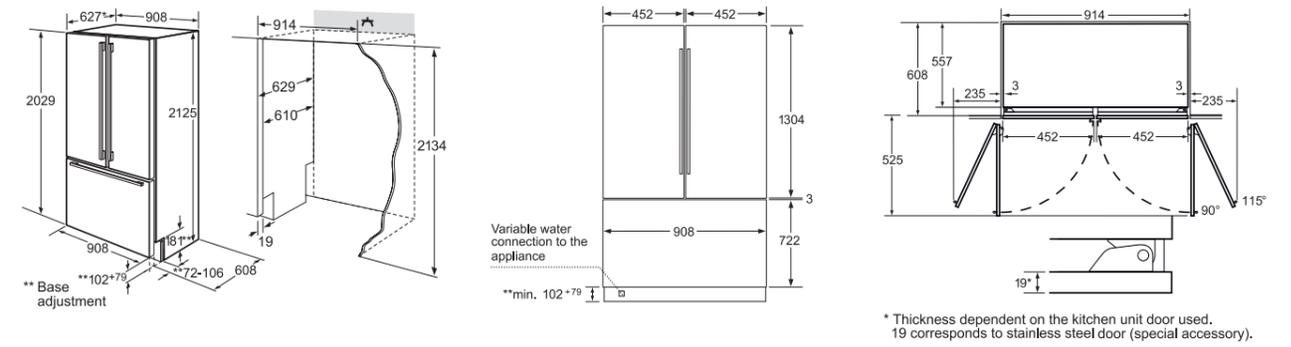


## aCool fridge freezer CI30BP02

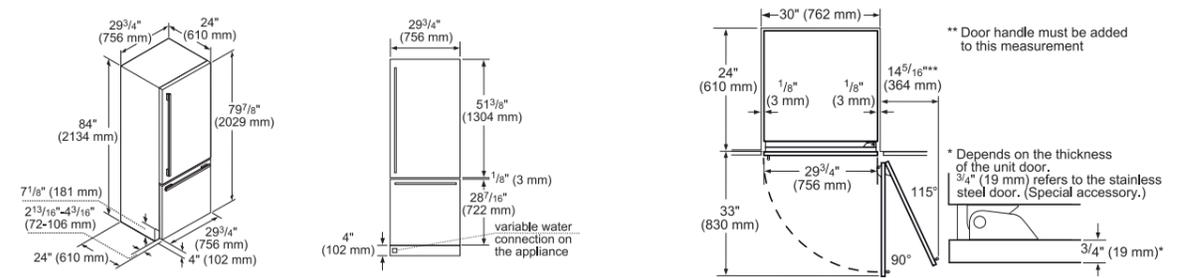

## aCool fridge CI24RP02

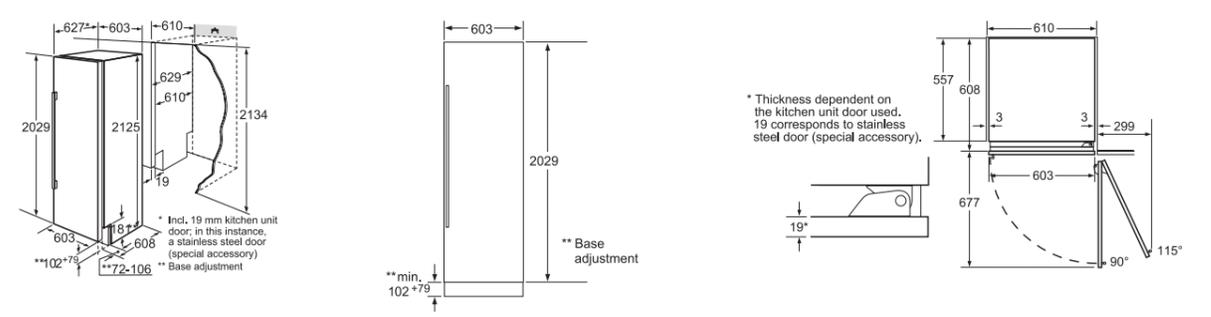


## aCool fridge CI30RP02

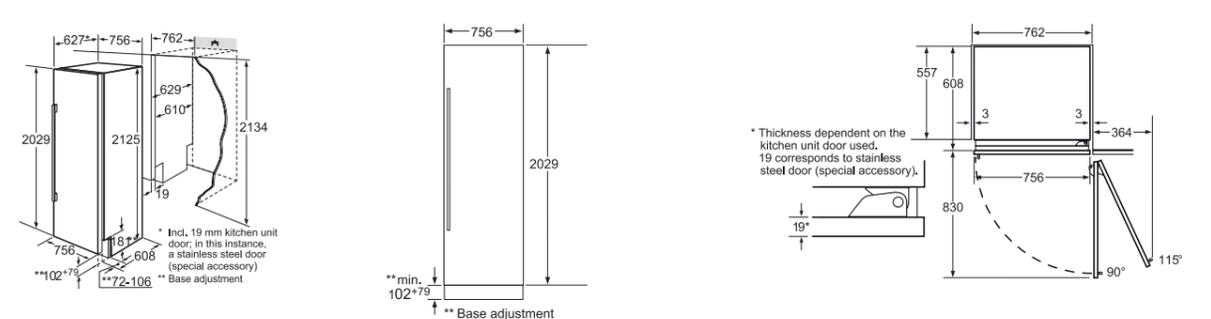


# Cooling technical diagrams


## aCool freezer FI24NP32

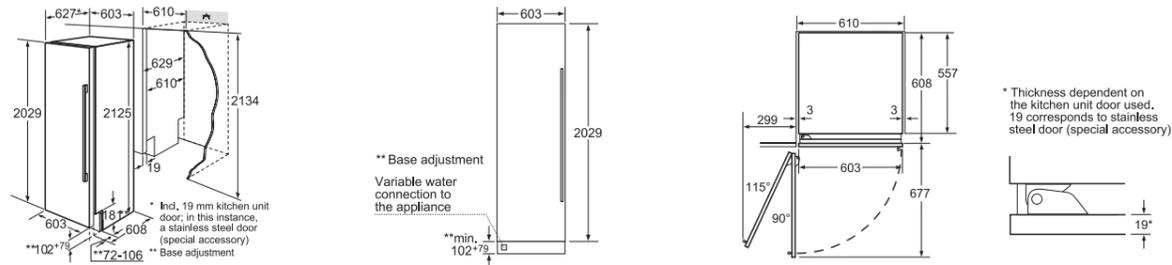


## aCool freezer FI30NP32

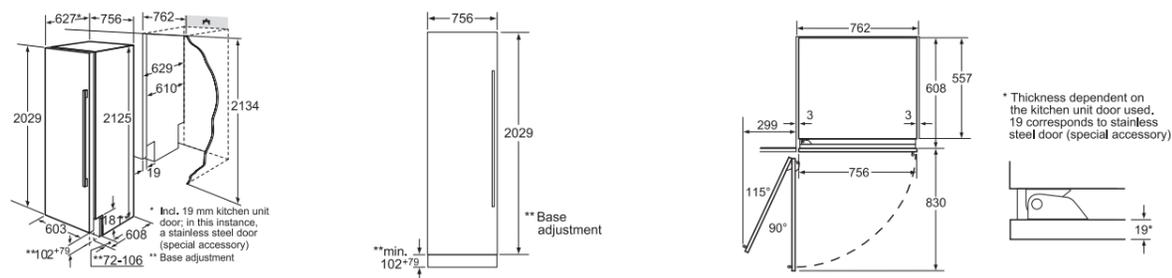


## aCool wine cooler CI24WP03

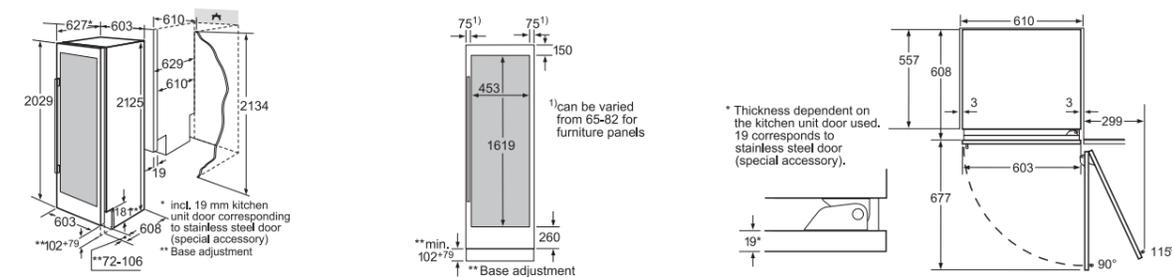


## aCool wine cooler CI18WP03

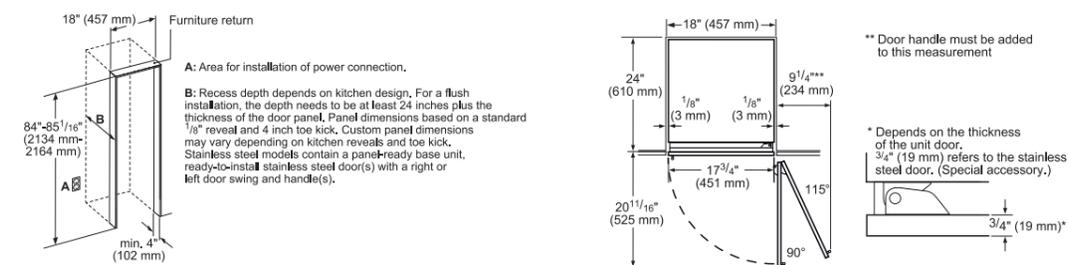


## American fridge freezer KA92NLB35G

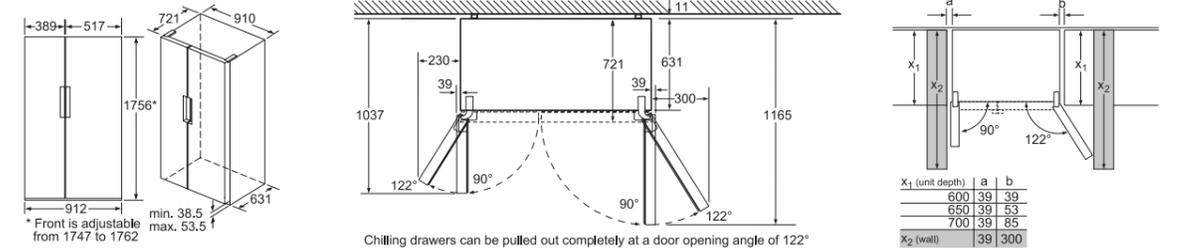


## American fridge freezer KA92DAI20G

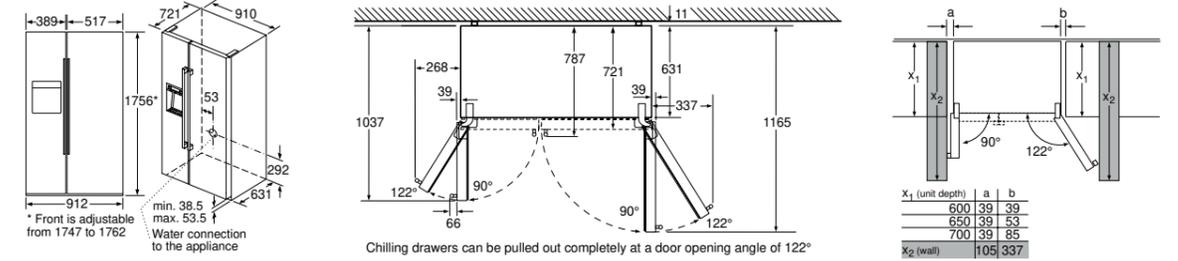

## American fridge freezers KA90DVI20G, KA90IVI20G and KA90NVI20G

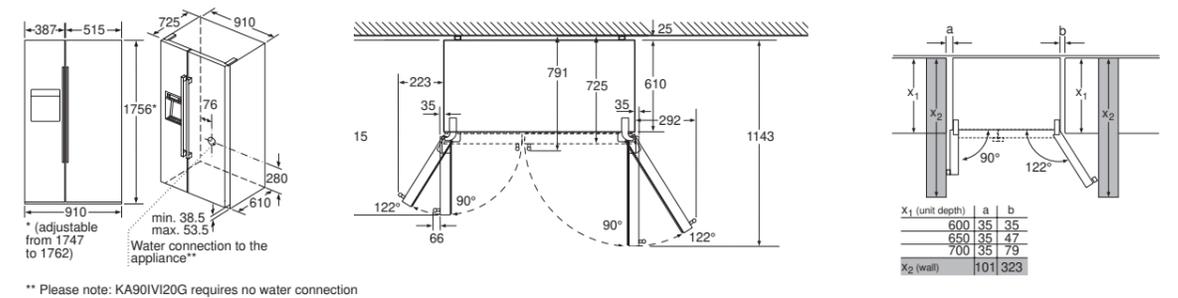


## American fridge freezer KA93NVIFP

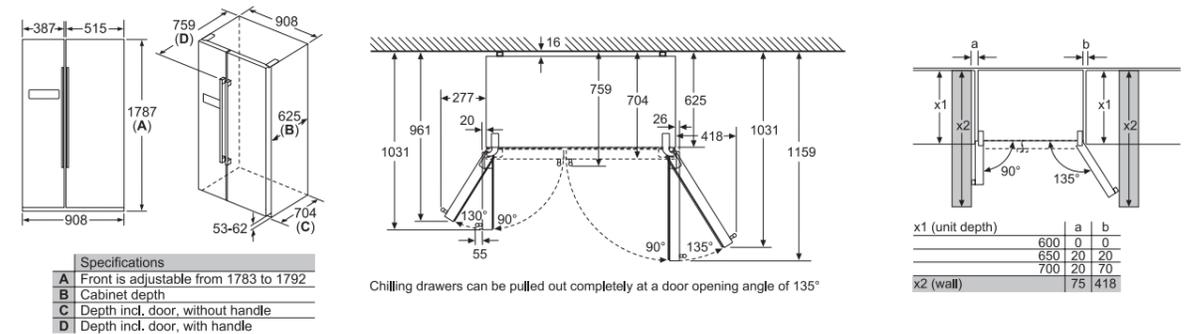


# Cooling technical diagrams


## noFrost fridge freezers KI86FHD40 and KI86NHD30

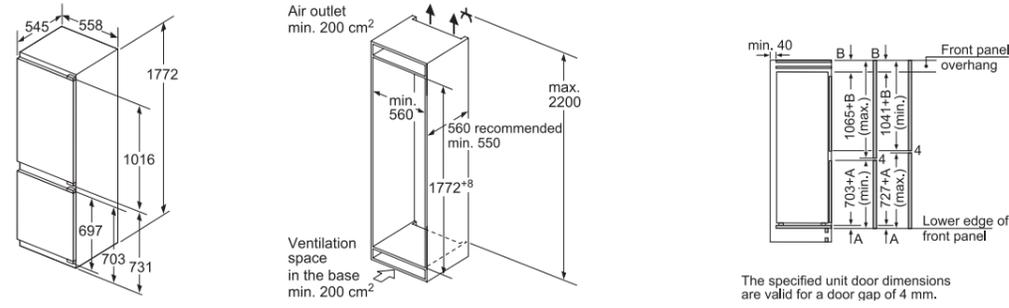


## lowFrost fridge freezer KI87FPF30 and KI87SAF30G

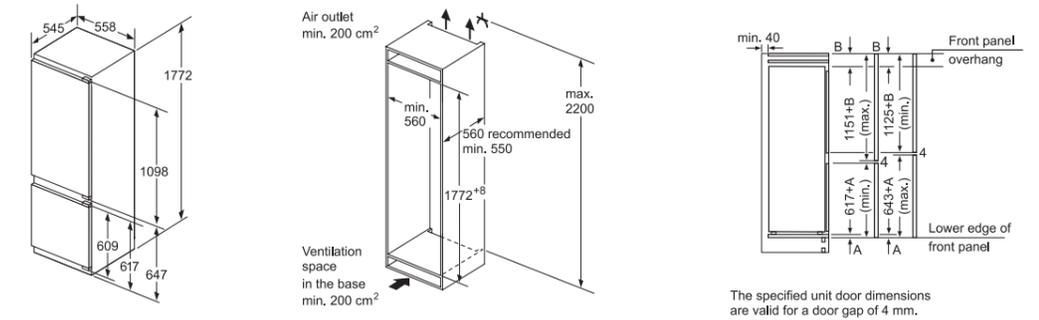


## noFrost fridge freezer KI86FPF30G

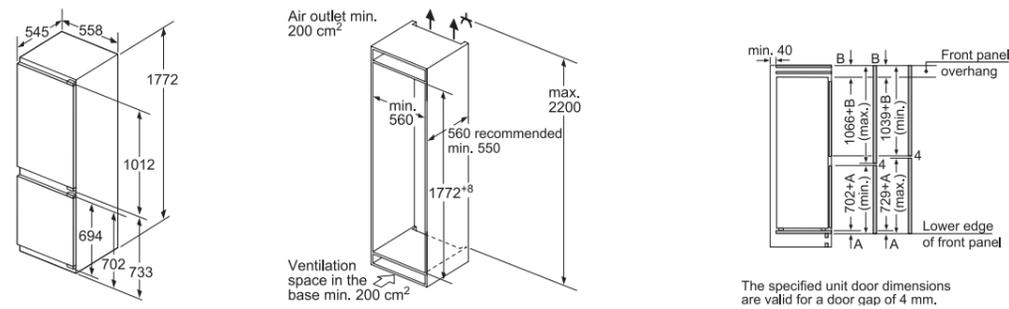


## lowFrost fridge freezer KI84FPF30 and KI86SAF30G

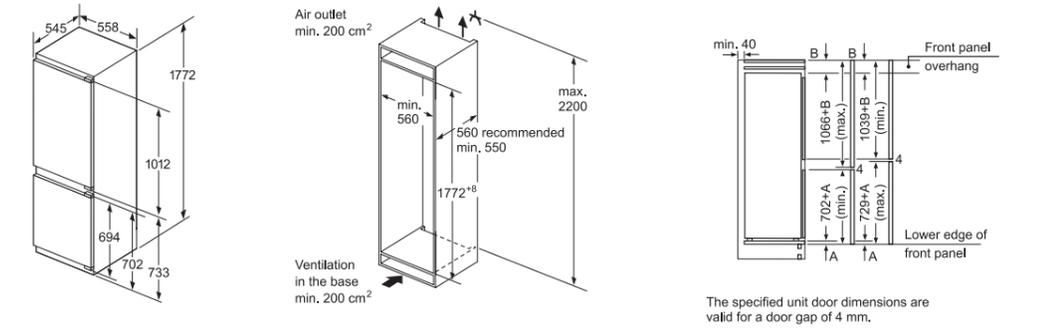


## noFrost fridge freezer KI85NAD30G

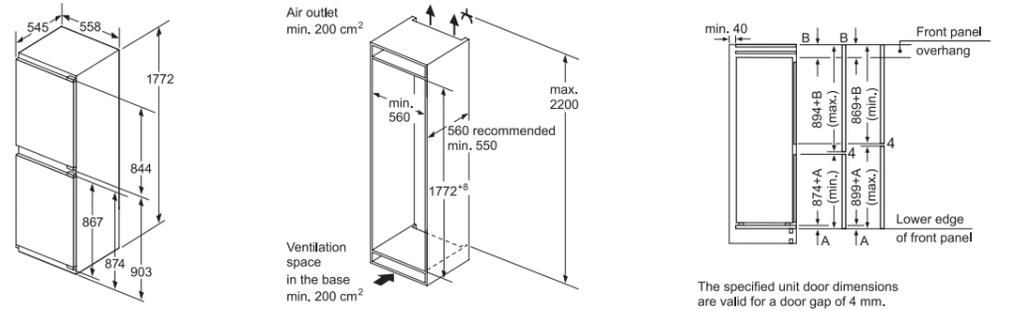


## lowFrost freezer KI87VVF30G

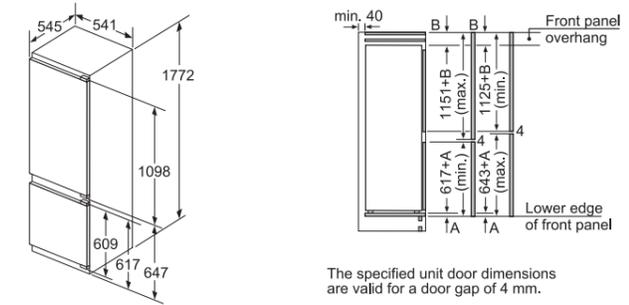

## noFrost fridge freezers KI86NVF30G and KI86VVF30G

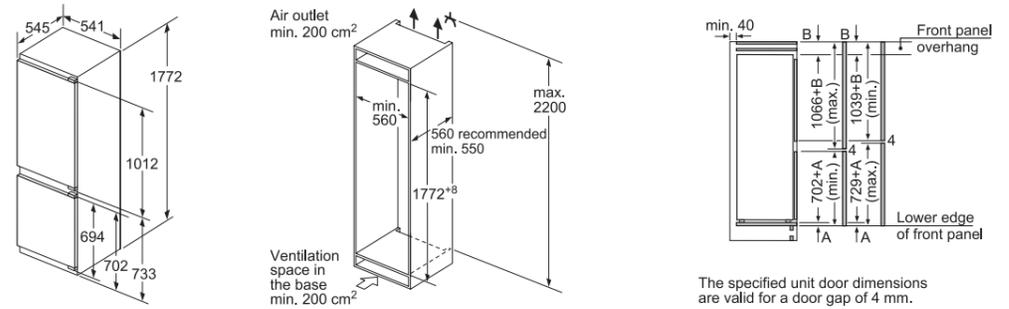



## lowFrost freezer KI87VVS30G

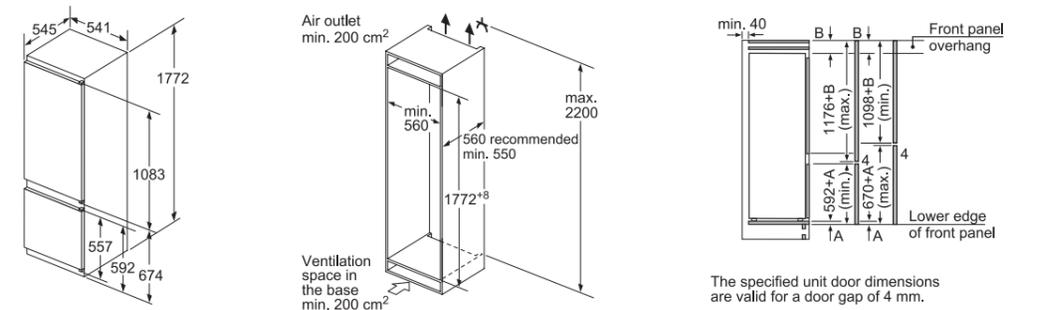





# Dishwasher technical diagrams

Fully integrated dishwashers SN878D26PE, SN678D06TG, SN678D01TG, SN658D00MG, SN658D01MG and SN658D02MG

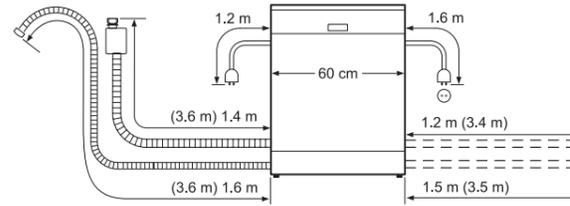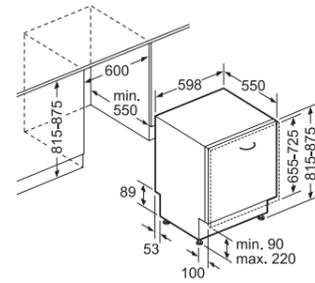



( ) values with extension kit

## Fully integrated dishwasher SN636X00KG

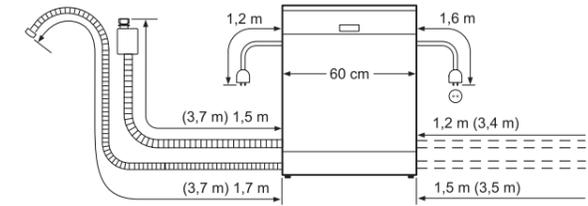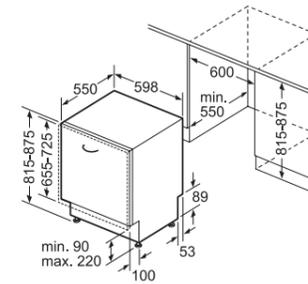



( ) values with extension kit

## Fully integrated dishwasher SX878D26PE

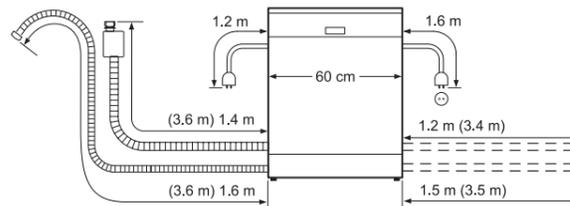
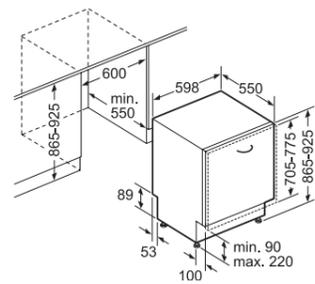


( ) values with extension kit

## 45cm fully integrated dishwashers SR656X01TE and SR636D00MG

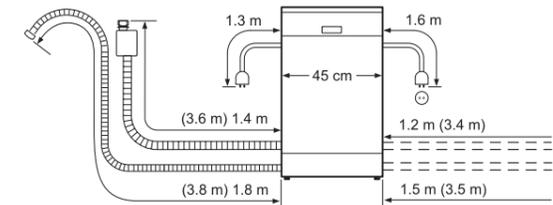
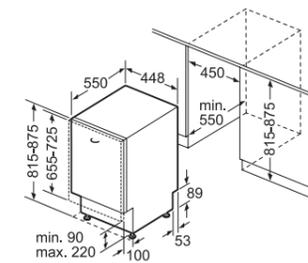


## Fully integrated dishwasher SN736X03ME

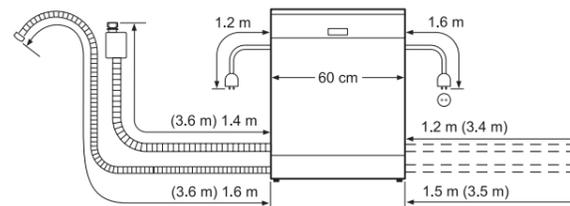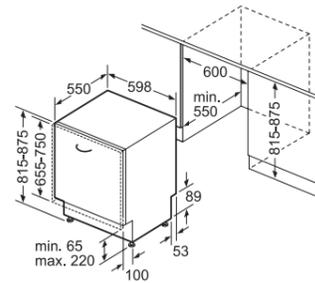

( ) values with extension kit



## Fully integrated dishwasher SX736X03ME

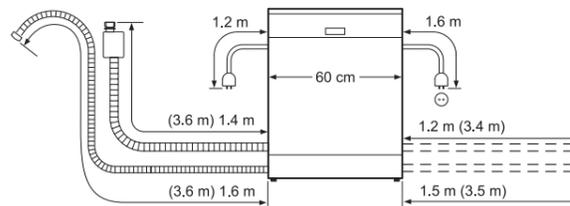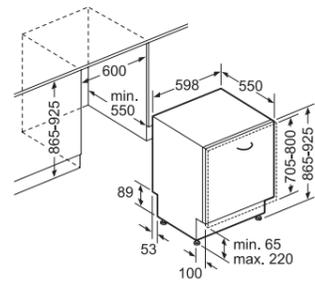

( ) values with extension kit

# Home laundry technical diagrams

## Integrated washing machines WI14W500G and WI14W300GB

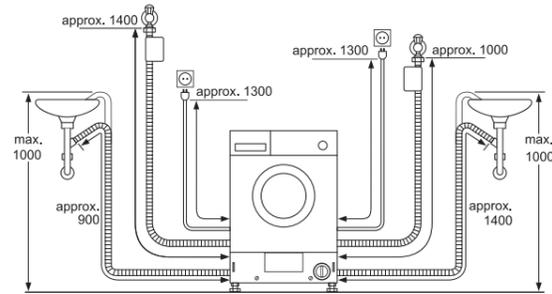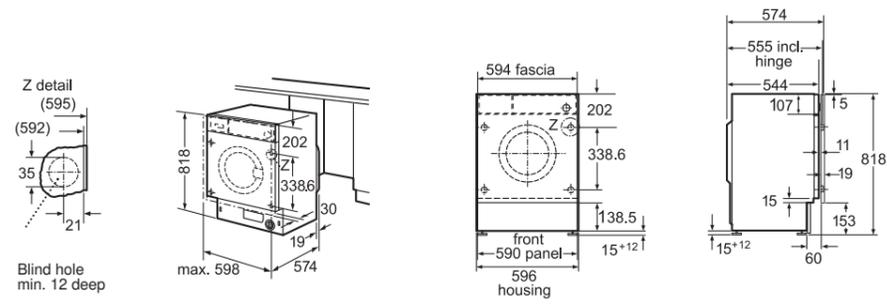

If, after fitting, the HydroSafe inlet hose to the installation is not long enough, it can be lengthened with the connecting kit WZ 10130 (length 2.5 m).

## Integrated washer dryers WK14D541GB and WK14D321GB

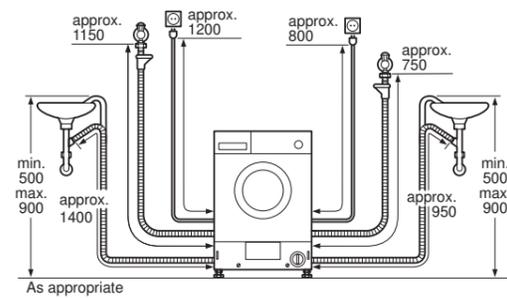
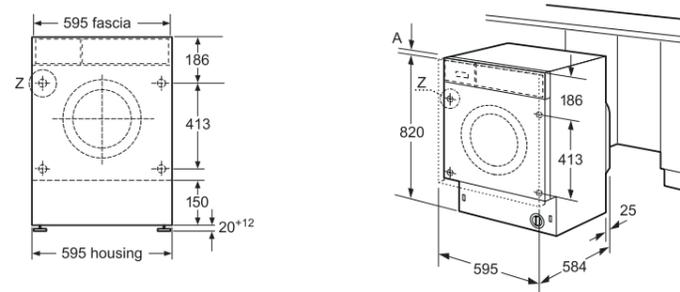


Image on front represents:  
**HN678GES6B** single oven  
**HB678GBS6B** single oven  
**EX807LX33E** venting hob

Siemens, a division of BSH Home Appliances Ltd,  
Grand Union House,  
Old Wolverton Road, Wolverton,  
Milton Keynes, MK12 5PT  
Tel: 0344 892 9040

[siemens-home.bsh-group.com/uk](http://siemens-home.bsh-group.com/uk)

BSH Home Appliances Ltd,  
M50 Business Park,  
Ballymount,  
Dublin 12  
Tel: 1890 626041

[siemens-home.bsh-group.com/ie](http://siemens-home.bsh-group.com/ie)

BSH Group is a Trademark Licensee of Siemens AG

#### Disclaimer

This brochure is current as from the publication date and supersedes all previous brochures for these products. Whilst BSH Home Appliances Ltd believes that all information contained within this brochure is correct at the time of going to print, no representation or warranty, express or implied, is or will be made and no responsibility or liability is or will be accepted by BSH Home Appliances Ltd in relation to the accuracy or completeness of this information and any liability is expressly disclaimed. To the extent permitted by law, BSH Home Appliances Ltd expressly excludes: i) all conditions, warranties and other terms which might otherwise be implied by statute, common law or the law of equity and ii) any liability for any direct, indirect or consequential loss or damage (including, without limitation, damages for loss of business or loss of profits) arising in contract, tort or otherwise from the use of or reliance on any information contained within this brochure or from any action or decision taken as a result of such use or reliance. BSH Home Appliances Ltd reserves the right to modify technical data and all other information contained within this brochure without notice. All rights reserved. No part of this publication may be reproduced in any form or without the prior written permission of BSH Home Appliances Ltd.

This brochure should not be regarded as an infallible guide nor as an offer of sale for a particular product.

Due to variables in the reproduction process, colours of actual products may vary slightly from those depicted. We recommend a visit to a Siemens dealer to confirm that specifications and colours are to your satisfaction.

Valid from July 2019

