

MY OUTDOOR «LED» WALL LAMP

MyWhite



MyWhite

MYWHITE è una famiglia di applique e plafoni pensata per l'outdoor ma adatta anche per interni, dal design essenziale e pulito. Sono perfette per realizzare suggestive composizioni in grado di valorizzare qualsiasi ambientazione.

LLDPE__Luce avvolgente emanata da un candido corpo in polietilene lineare: il materiale realizzato in stampaggio rotazionale è resistente agli UV, non ingiallisce né si deteriora e contribuisce a garantire una distribuzione ottimale della luce.

GAMMA__La famiglia si declina in varie forme e dimensioni, con diversi livelli di potenza, luminosità e temperatura colore, per le applicazioni più diverse. Fonti che illuminano le facciate e i perimetri delle abitazioni, che indicano un percorso o che fungono da sicuro riferimento per chi entra in un sottopassaggio.


VERSATILITÀ__MyWhite è anche MiniWhite: un'applique quadrata o tonda di dimensioni ridotte, estremamente compatta. Un piccolo gioiello luminoso per pattern estremamente creativi. Ad ampliare la famiglia, anche le nuovissime MyWhite con sensore di presenza, perfette per luoghi di passaggio, oppure nelle versioni con alimentazione ausiliaria.

NOVITÀ__Un nuovo elemento luminoso arricchisce la famiglia MyWhite. Dalla forma semplice ma creativa, MyWhite_U rielabora il concetto di illuminazione outdoor: un tocco di originalità abbinato alla tecnologia LED, in una veste resistente ed affidabile, per l'illuminazione di facciate, porticati, zone di passaggio.


MyWhite_U




Dimensions

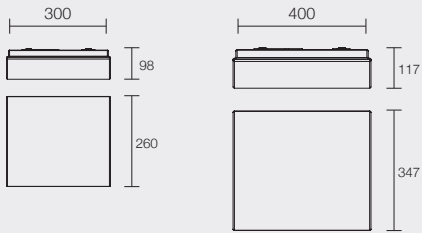


MyWhite_O




MiniWhite_R | MyWhite_R










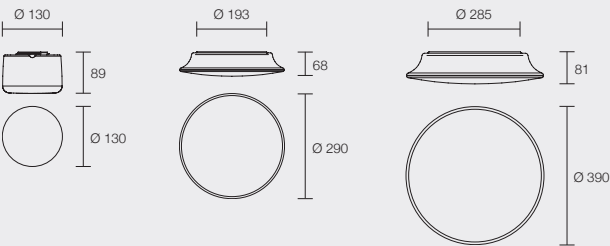


MiniWhite_Q | MyWhite_Q

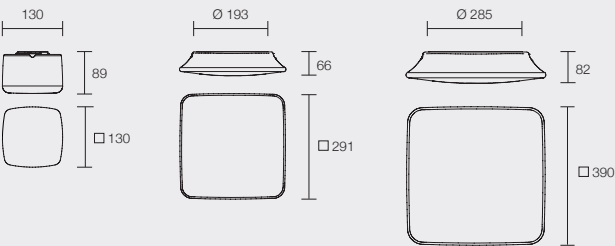


MyWhite_B

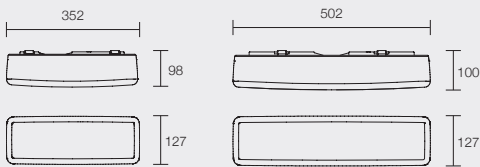


Watt	Version	Illuminance
MyWhite_U 11 W MyWhite_U 17 W	ON OFF ON OFF	MiniWhite_U 11 W  Lighting Area = Ø 12 m. MyWhite_U 17 W  Lighting Area = Ø 12 m.
MyWhite_O 8 W	ON OFF	MyWhite_O 8 W  Lighting Area = 20 x 12 m.
MiniWhite_R 4 W MyWhite_R 10 W MyWhite_R 16 W	ON OFF ON OFF ON OFF EM	MiniWhite_R 4 W  Lighting Area = Ø 21 m. MyWhite_R 10 W  Lighting Area = Ø 10 m. MyWhite_R 16 W  Lighting Area = Ø 10 m.
MiniWhite_Q 4 W MyWhite_Q 10 W MyWhite_Q 16 W	ON OFF ON OFF ON OFF EM	MiniWhite_Q 4 W  Lighting Area = Ø 21 m. MyWhite_Q 10 W  Lighting Area = Ø 10 m. MyWhite_Q 16 W  Lighting Area = Ø 10 m.
MyWhite_B 7 W MyWhite_B 11 W	ON OFF ON OFF EM	MyWhite_B 7 W  Lighting Area = 31 x 11 m. MyWhite_B 11 W  Lighting Area = 31 x 11 m.

MyWhite_U | ceiling-wall | TopLED | 11 W 220-240 V



type	colour	optics
White CRI85 7889	3000 K 1246 lm	Diffused


MyWhite_U | ceiling-wall | TopLED | 17 W 220-240 V



type	colour	optics
White CRI85 7890	3000 K 1800 lm	Diffused




MyWhite_O | ceiling-wall | TopLED | 8 W 220-240 V



type			colour		optics
White	CRI85	8027	3000 K	970 lm	Diffused
White	CRI85	8027N	4000 K	970 lm	Diffused




MiniWhite_R | ceiling-wall | TopLED | 4 W 220-240 V





type		colour		optics
White	CRI85 8028	3000 K	400 lm	Diffused
White	CRI85 8028N	4000 K	400 lm	Diffused

MyWhite_R | ceiling-wall | TopLED | 10 W 220-240 V




type		colour		optics
White	CRI85 7805	3000 K	1122 lm	Diffused
White	CRI85 7805N	4000 K	1122 lm	Diffused

MyWhite_R | ceiling-wall | TopLED | 16 W 220-240 V




type		colour		optics
White	CRI85 7806	3000 K	1598 lm	Diffused
White	CRI85 7806N	4000 K	1598 lm	Diffused

MyWhite_R | ceiling-wall | TopLED | **16 W** 220-240 V**type**White CRI85 **7806S****colour**

3000 K 1598 lm

optics

Diffused

motion
sensortime
3 min.sensitivity range
Ø 5 m. H 2,7 m.**MyWhite_R** | ceiling-wall | TopLED | **16 W** 220-240 V**type**White CRI85 **7806E****colour**


3000 K 1598 lm

optics


Diffused



emergency

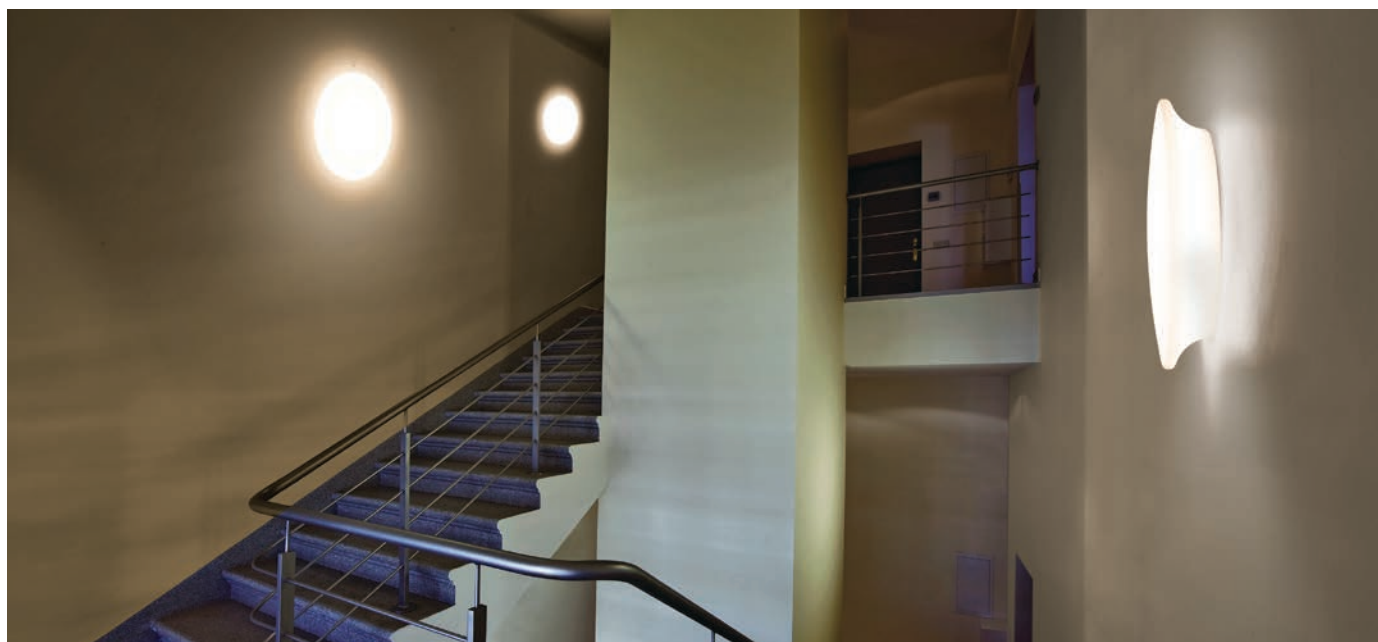
EM autonomy
3 h.EM brightness
14%

MiniWhite_Q | ceiling-wall | TopLED | 4 W 220-240 V





type		colour		optics
White	CRI85 8029	3000 K	400 lm	Diffused
White	CRI85 8029N	4000 K	400 lm	Diffused

MyWhite_Q | ceiling-wall | TopLED | 10 W 220-240 V




type		colour		optics
White	CRI85 7807	3000 K	1122 lm	Diffused
White	CRI85 7807N	4000 K	1122 lm	Diffused

MyWhite_Q | ceiling-wall | TopLED | 16 W 220-240 V




type		colour		optics
White	CRI85 7808	3000 K	1598 lm	Diffused
White	CRI85 7808N	4000 K	1598 lm	Diffused

MyWhite_Q | ceiling-wall | TopLED | **16 W** 220-240 V**type**White CRI85 **7808S****colour**

3000 K 1598 lm

optics

Diffused

motion
sensortime
3 min.sensitivity range
Ø 5 m. H 2,7 m.**MyWhite_Q** | ceiling-wall | TopLED | **16 W** 220-240 V**type**White CRI85 **7808E****colour**

3000 K 1598 lm

optics



Diffused



emergency


EM autonomy
3 h.EM brightness
14%

MyWhite_B | ceiling-wall | TopLED | 11 W 220-240 V




type	colour	optics
White CRI85 7809	3000 K 1065 lm	Diffused
White CRI85 7809N	4000 K 1065 lm	Diffused

MyWhite_B | ceiling-wall | TopLED | 17 W 220-240 V



type	colour	optics
White CRI85 7810	3000 K 1731 lm	Diffused
White CRI85 7810N	4000 K 1731 lm	Diffused

MyWhite_B | ceiling-wall | TopLED | 17 W 220-240 V



type	colour	optics
White CRI85 7810S	3000 K 1731 lm	Diffused



motion sensor




time 3 min.



sensitivity range Ø 5 m. H 2,7 m.

MyWhite_B | ceiling-wall | TopLED | 17 W 220-240 V



type	colour	optics
White CRI85 7810E	3000 K 1731 lm	Diffused



emergency



EM autonomy
3 h.



EM brightness
7%



Linea Light S.r.l. Italy
via della Fornace, 59 z.i.
31023 Castelfranco di Resana (TV) - Italy
Phone: +39 0423 78 68
Fax: +39 0423 78 69 00
info@linealight.com

LightVillage Milano - Exhibition Area Only
via Morimondo, 26 int. 17G
20143 Milano
Phone: +39 02 36750915
Fax: +39 02 36750915
milano@lightvillage.it

Linea Light France
Z.A. Heiden Est, 12 rue des Pays-Bas
68310 Wittelsheim - France
Phone: +33 389 75 52 23
Fax: +33 389 75 59 07
info@linealight.fr

Linea Light UK Ltd
Suite 109 - Business Design Centre
52 Upper Street - Islington N10QH - London - UK
Phone: +44 0203 6371983
info@linealight-uk.com

Linea Light Deutschland GmbH
Aktienstraße 214
45473 Mülheim a.d. Ruhr - Germany
Phone: +49 208 299979-0
Fax: +49 208 299979-10
service@linealight.de

Linea Light GCC - Middle East & Gulf Countries
Jumeirah Lake Towers
JBC2 - 35th Floor Office 02 - Dubai - UAE
P.O. Box 125902
Phone: +971 4 4218275
Fax: +971 4 4218274
info@linealight.ae

Linea Light Polska Sp. z o.o.
ul. Wiosenna, 47
41253 Czeladź - Poland
Phone: +48 32 265 11 21
Fax: +48 32 265 04 42
biuro@linealight.com.pl

Linea Light Russia
Luzhnetskaya nab., 2/4, str. 3, of. 304
119270 Moscow - Russian Federation
Phone: +7 495 639 99 41
info@linealight.ru

Linea Light USA | Inter Lux
3741 Commerce Drive
Suites 306-308
Baltimore, MD 21227 - USA
Phone: +1 410 381 1497
Fax: +1 410 381 1589
answers@inter-lux.com

Linea Light Asia-Pacific Ltd
YuXiang Industrial Area
528478 HengLan Town, ZhongShan City,
GuangDong Province, China
Phone: +86 760 87618355
Fax: +86 760 87553990
info@linealight.cn



linealight.com





Your Light | Future Proof