

POINT

Our company has created functional lighting since 2005. We are focused on developing and producing fixtures used in different spheres of life while maintaining the overall design. We seek the optimal balance between quality and quantity of light, using minimalistic, clean, basic forms. The dimensions of fixtures are kept to a minimum, while their performance indicators are maximized. The fixtures blend seamlessly into the interior environment and become an integral part of the architecture.

Today, Centrsvet has all the knowledge and technology to offer you the best lighting in Russia.

CENTRSVET

POINT SERIES

Built-in fixtures are available in four sizes. Two types of mounting frames: modern minimalistic plaster and classic. The frameless mounting offers an invisible transition between the fixture body and ceiling.

By default, all fixtures are equipped with Flicker-Free technology. Point M and Point XL models are equipped with a 220V dimmer.

As an option, all fixtures can be equipped with a TRIAC or DALI 220V dimmer.

Fixtures design and optical system are developed by Centrsvet and licenced by Rospatent.

POINT XS 14




POINT S 16







POINT M 34



POINT XL 48

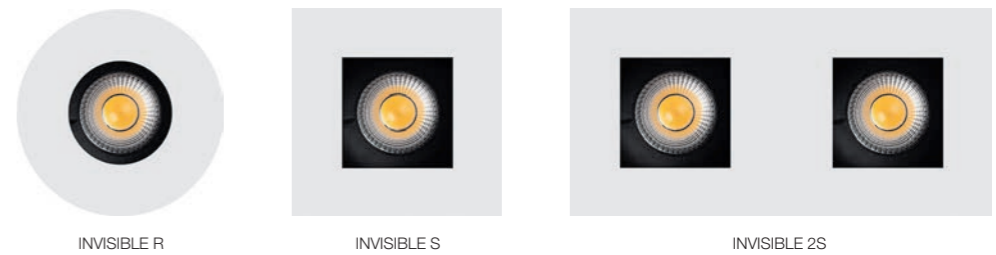

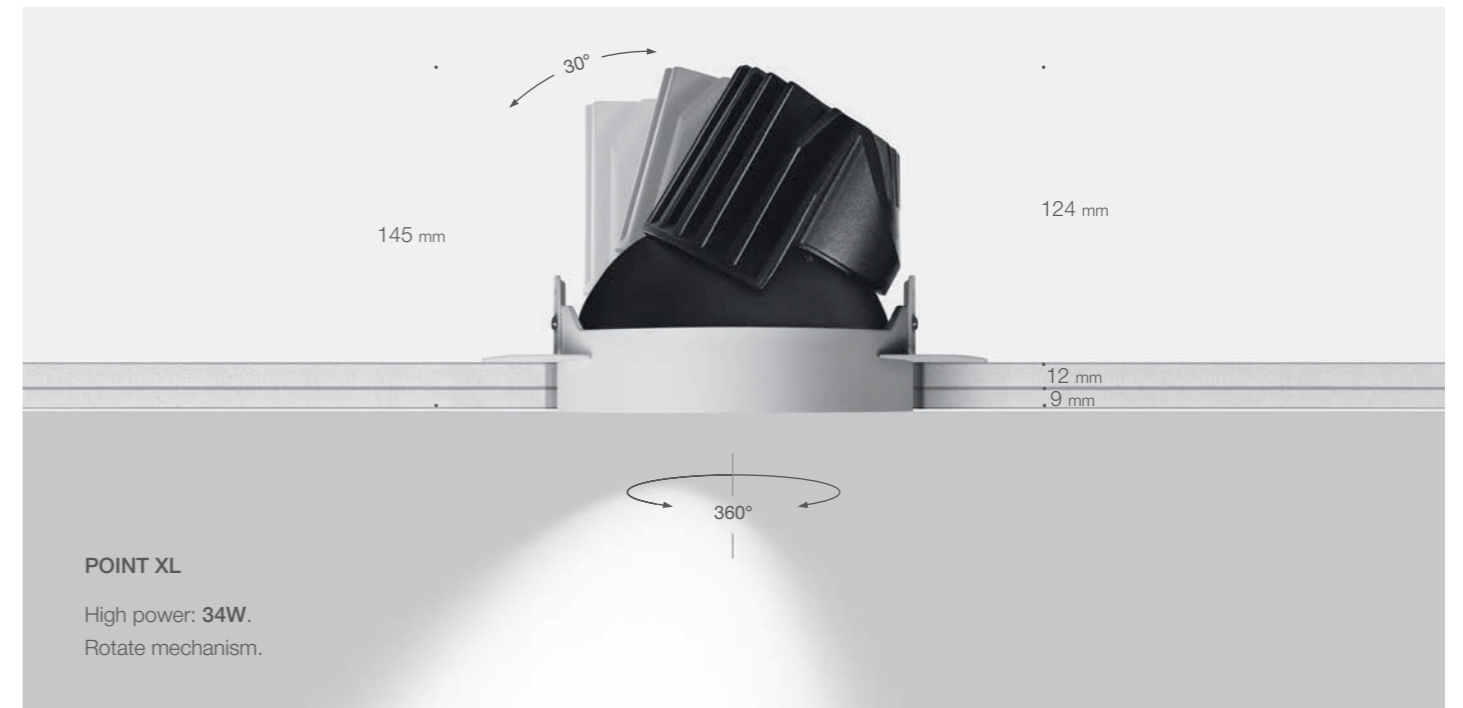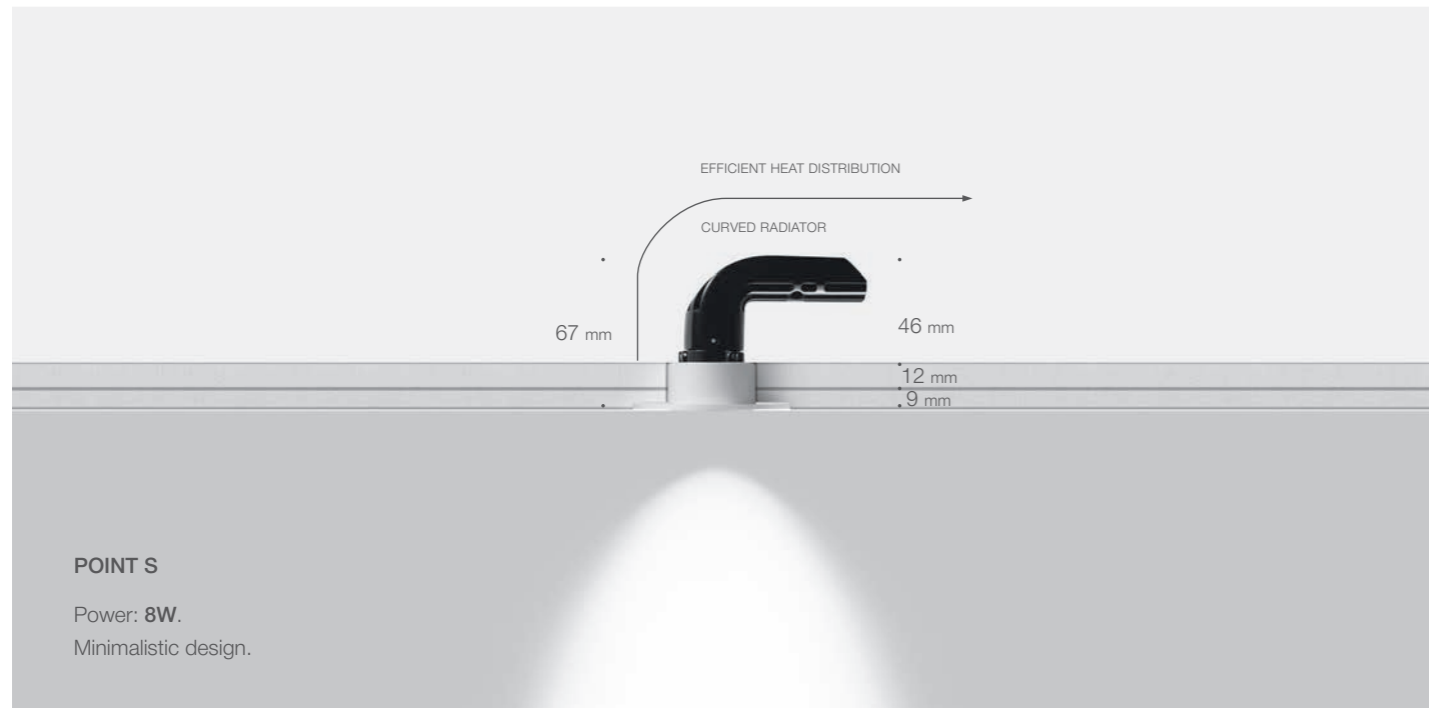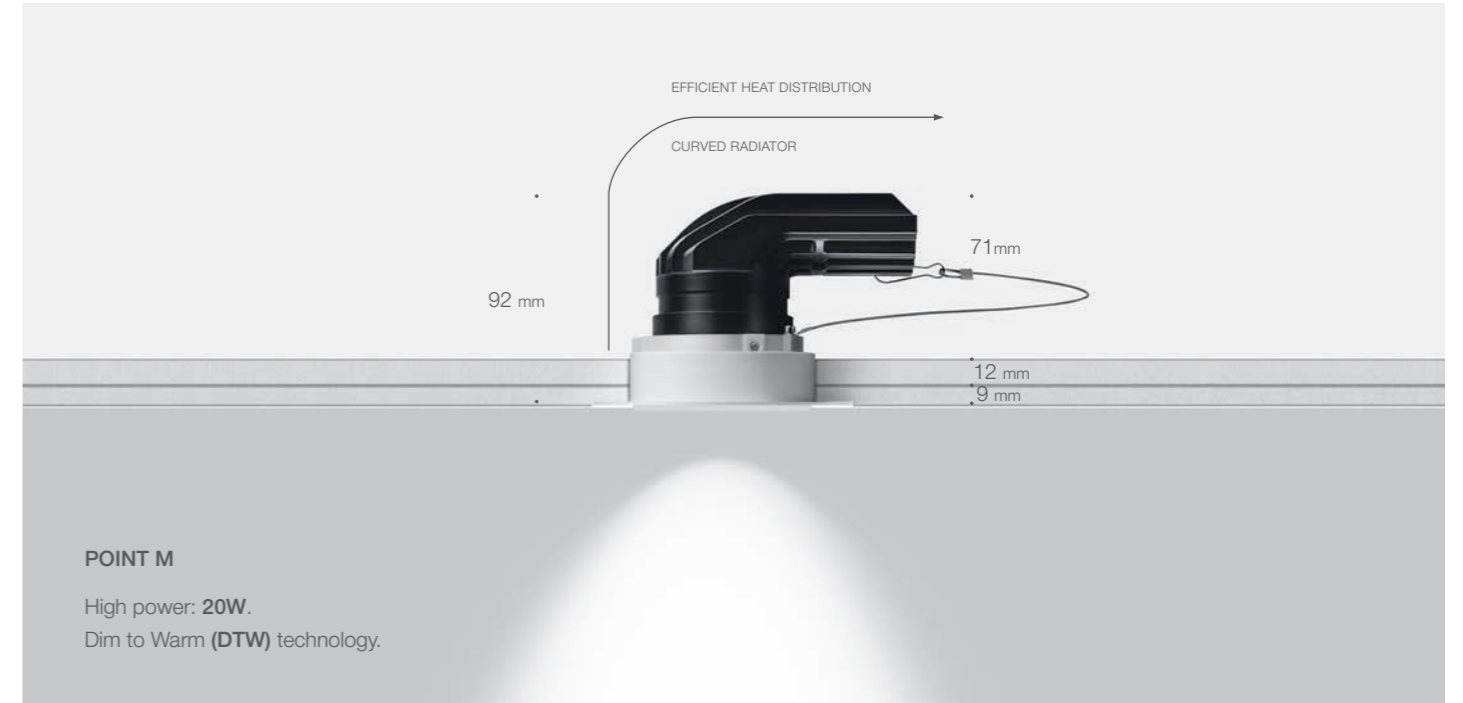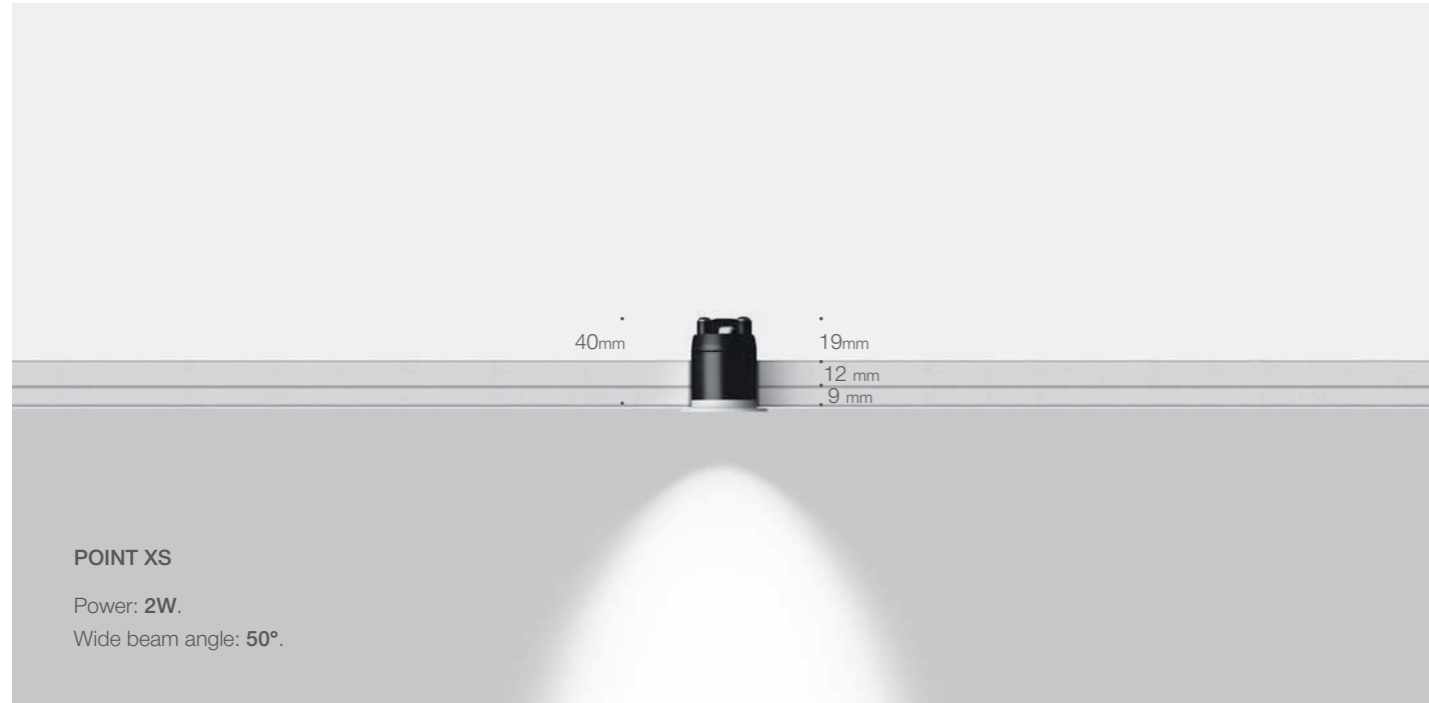



DIM TO WARM

———— (DTW)

New generation LEDs with Dim to Warm (DTW) function.

Changing the colour temperature: from 3000K with 100% intensity to 1800K with 5% intensity. Thanks to the special Pure Light lens, the fixtures maintain colour uniformity during dimming.



COMFORT LIGHT

—— UGR

Development of Point fixtures focused on the Unified Glare Rating. Each Point series has $UGR < 16$.

The European standard is $UGR < 19$.



$UGR > 19$



$UGR < 16$




FLICKER
— FREE

All Point fixtures are equipped with a Flicker Free power supply that excludes light pulses.



You can check the light pulses with your phone display. We carry out accurate measurements in our own lab.

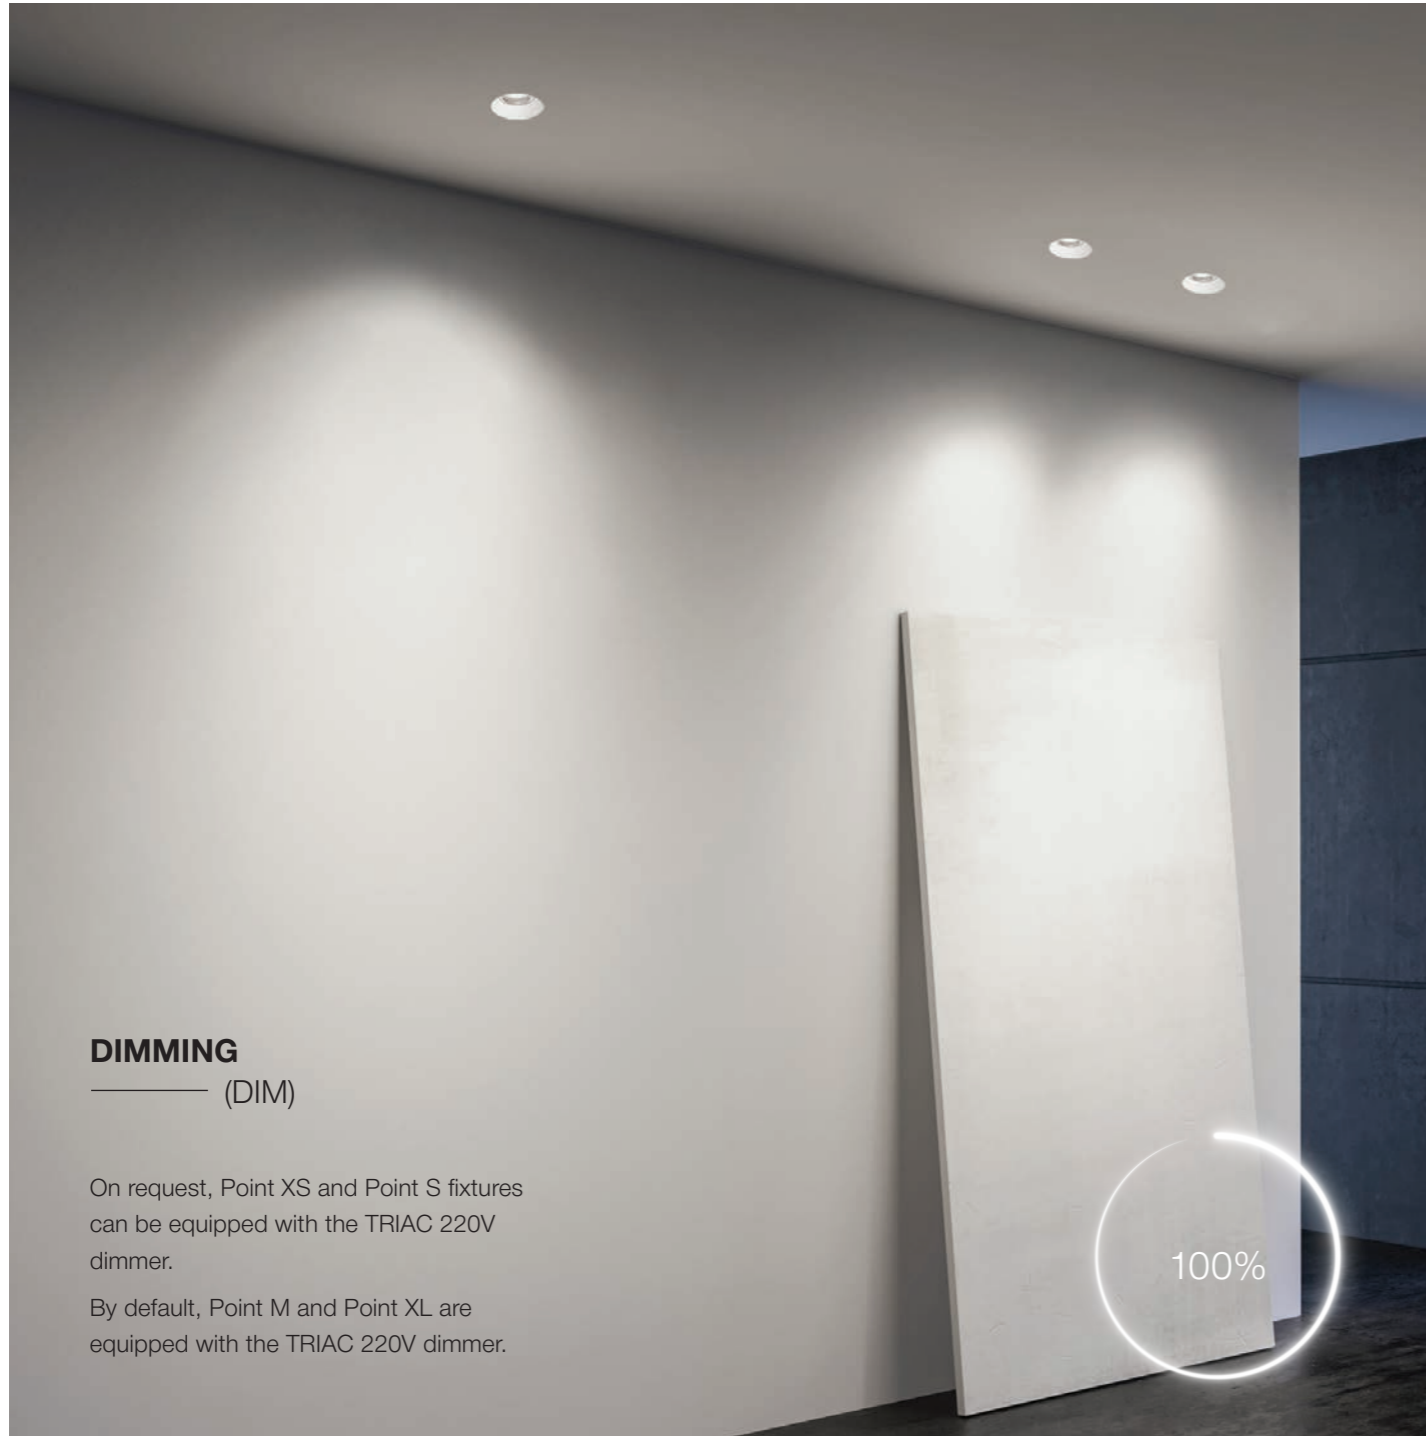


DIMMING

———— (DIM)

On request, Point XS and Point S fixtures can be equipped with the TRIAC 220V dimmer.

By default, Point M and Point XL are equipped with the TRIAC 220V dimmer.

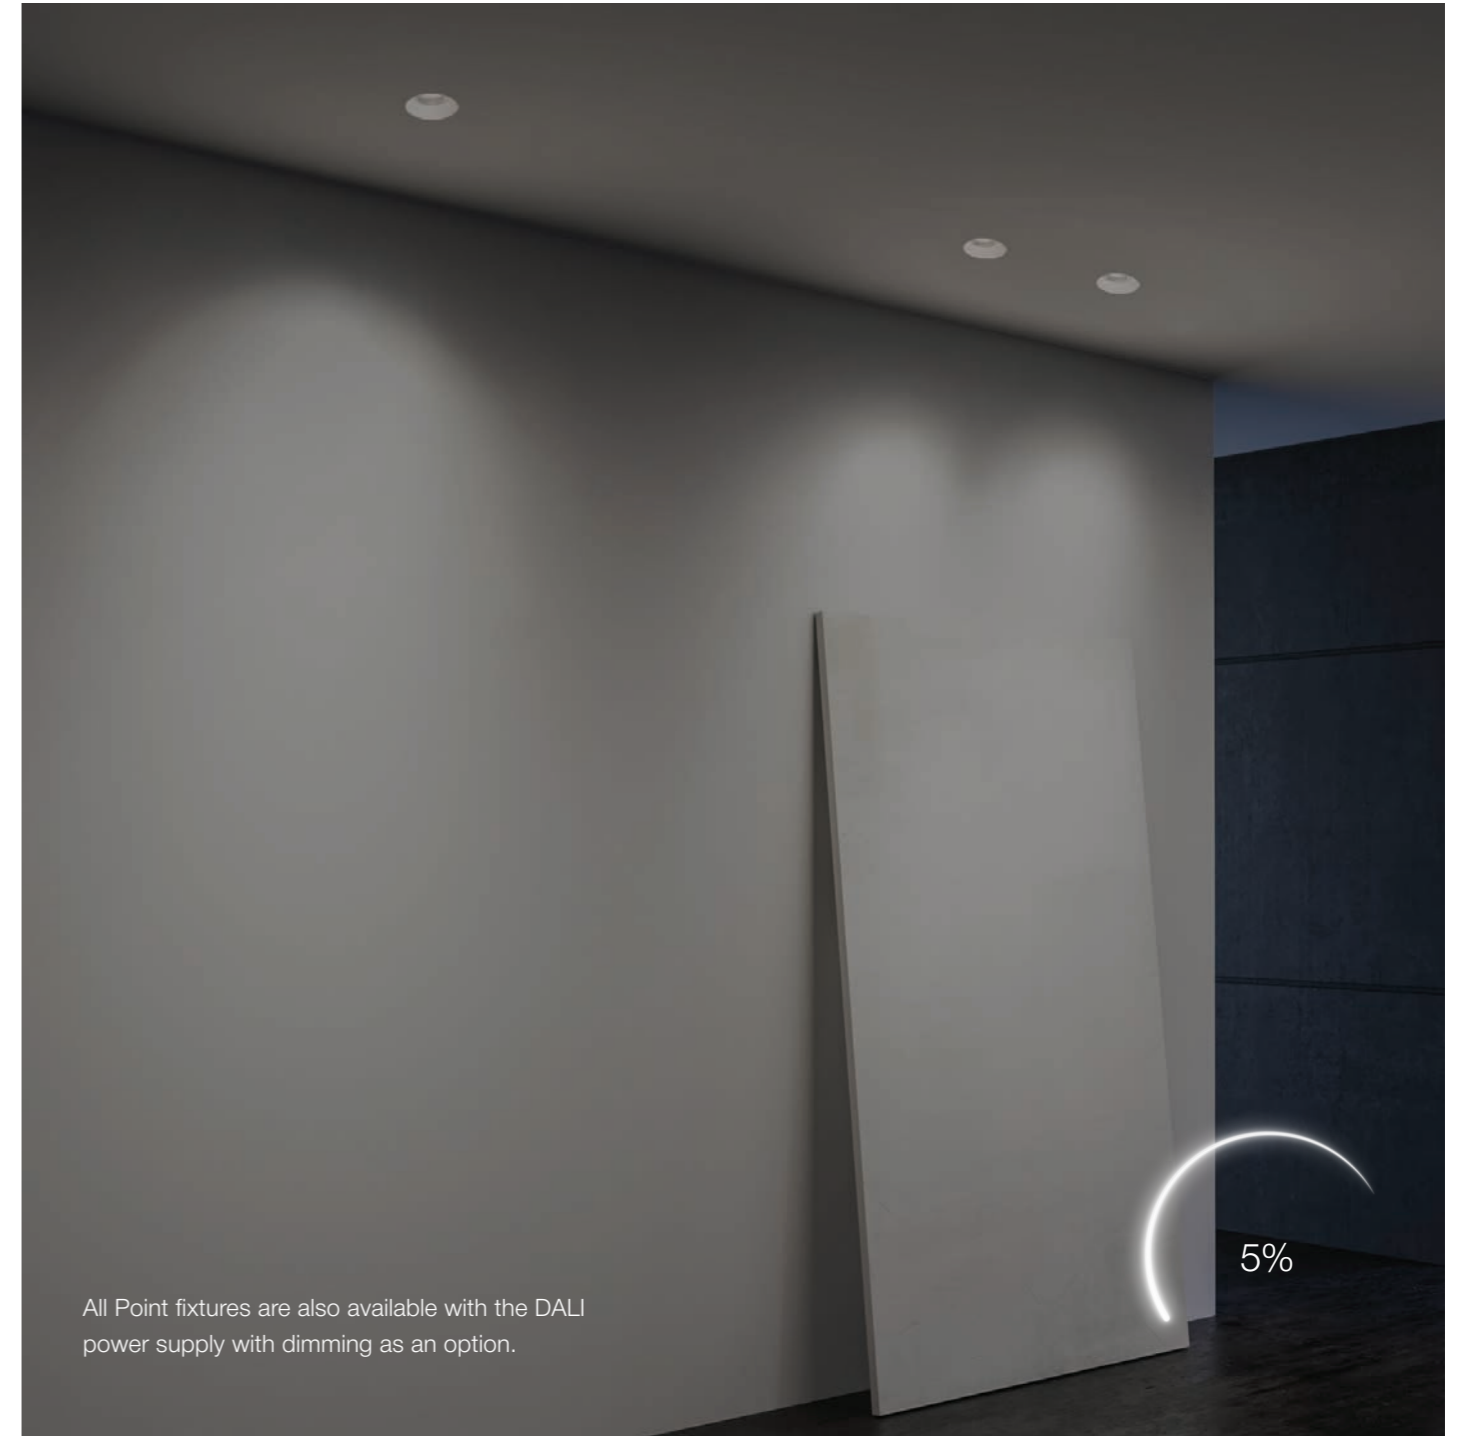


All Point fixtures are also available with the DALI power supply with dimming as an option.



POINT XS R WHITE SAND




POINT XS R BLACK SAND

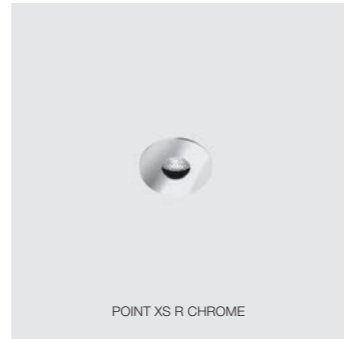


POINT XS R CHROME



POINT XS R MATTE CHROME

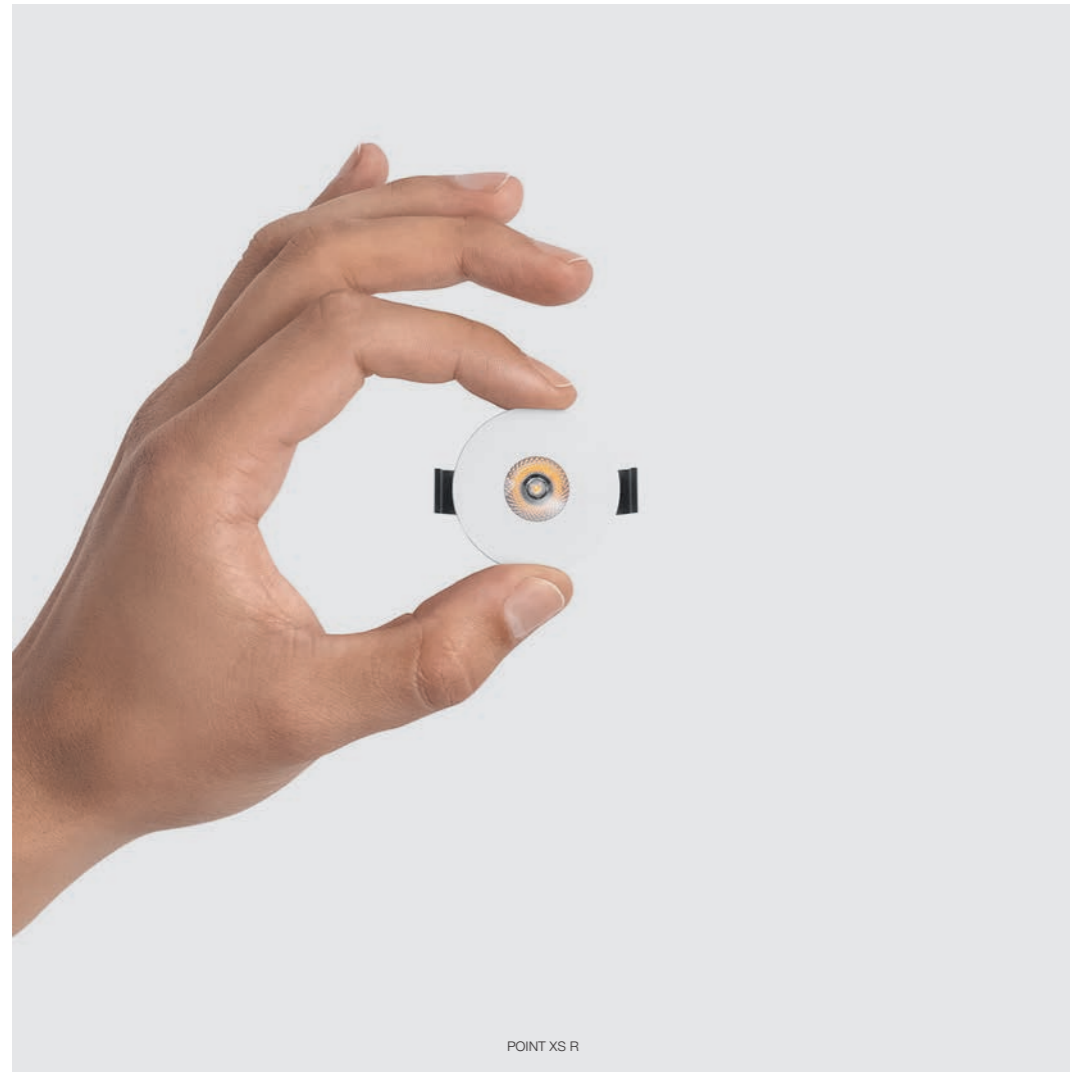


POINT XS R




POINT XS S WHITE SAND



POINT XS S BLACK SAND




POINT XS S CHROME



POINT XS R 0230 50°

2W 180lm 3000K CRI90
50° IP40 220V



POINT XSS 0230 50°

2W 180lm 3000K CRI90
50° IP40 220V



Installation manuals, video, examples, and actual prices are available at our website www.centrsvet.ru. Scan the QR code with your phone.


Three colour temperatures are available: 2700K / 3000K / 4000K.

Colours: White Sand / Black Sand / Chrome / Brushed Chrome.


The fixture is equipped with a power supply without dimming.

A power supply with dimming is available as an option: TRIAC 220 V or DALI.


POINTS




SPOT




INVISIBLE




INVISIBLE IP44



WALL




SOFT



IP44 GLASS



COVER POINT S



UNDER PLASTER



FRAME POINT ST




WITH FRAME




FRAME POINT SR




- WD - WHITE SAND
- BD - BLACK SAND
- WP - WHITE PEARL
- BP - BLACK PEARL
- GG - GOLDEN GLANCE
- GD - GOLDEN SAND
- CD - COPPER SAND
- CH - CHROME
- CB - BLACK CHROME
- BZ - BRONZE




ST WHITE PEARL




ST BLACK PEARL

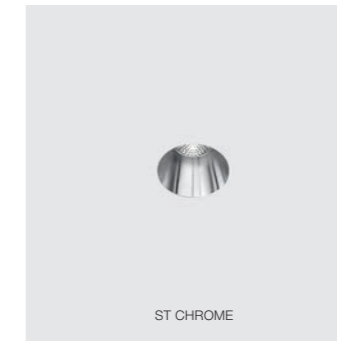


ST CHROME




ST GOLDEN GLANCE

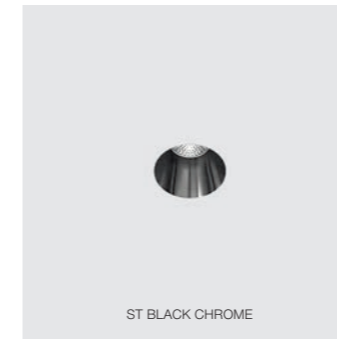


ST BLACK CHROME



ST GOLDEN SAND




ST BRONZE




ST COPPER SAND




SR WHITE PEARL | WHITE FRAME



SR BLACK PEARL | WHITE FRAME




SR CHROME | WHITE FRAME




SR GOLDEN GLANCE | WHITE FRAME




POINT ST INVISIBLE



POINT ST WALL



POINT ST SOFT

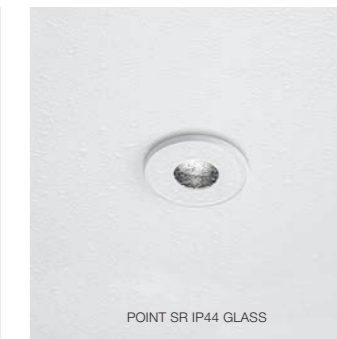


POINT SR IP44 GLASS

EASY MOUNTING

To facilitate installation, we developed a special tool with two-level bits.



Install the frame into a small slot. Only minimal plaster layer is required.

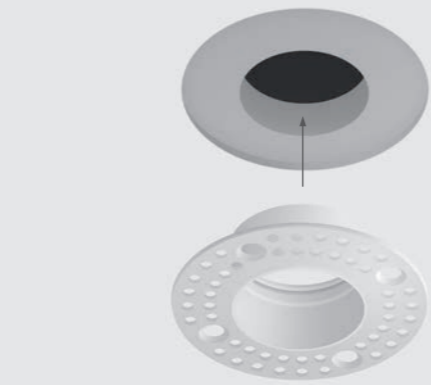

The power supply is placed into the hole.



3.

Final finishing.

Install the fixture.




Frameless design.
Modern minimalistic design.

6.

MAINTENANCE

You can remove the power supply and the fixture at any time by simply pressing them and putting them back in place without damaging the final finishing.

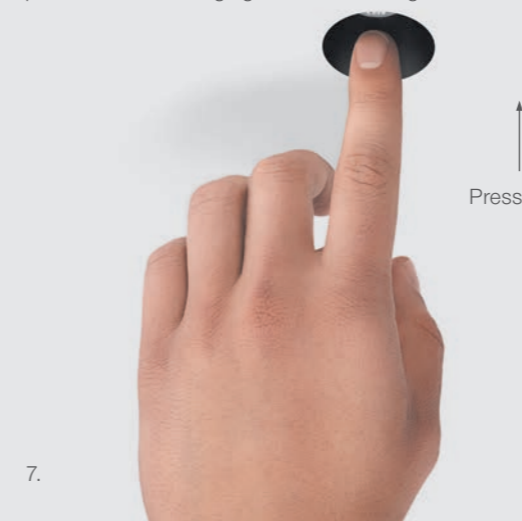


8.

MINIMALISTIC DESIGN

No visible frame. Invisible transition between the body and the ceiling.

Diameter: 35 mm
Power: 8W




ULTRA WIDE OPTICAL LENS

Ensuring a wide beam angle with a minimum diameter of the light output hole.

Narrow/medium angle is available.

EXCLUSIVE CAPS

Selection of different colours.

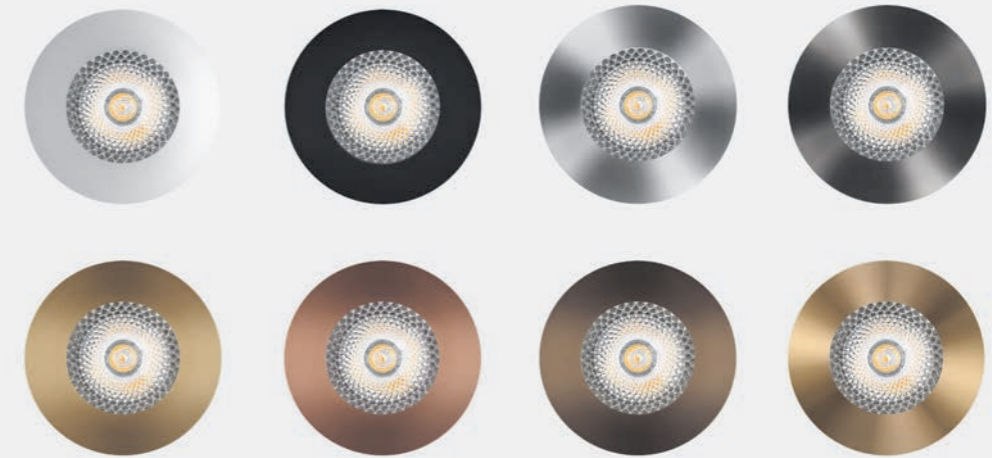

EXCLUSIVE CAPS



POINT ST SPOT

Frameless fixture.

Invisible transition between the fixture body and the ceiling.

Recessed light source ensures a high level of comfort lighting.




POINT SR SPOT

Frame fixture.

Easy mounting at any stage.

Recessed light source ensures a high level of comfort lighting.

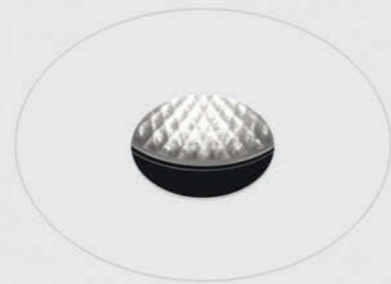

POINT ST INVISIBLE

Completely blends in the ceiling surface.
Painting in the colour of the ceiling is possible.

Diameter: 35 mm.
The power supply is placed into the hole.



POINT ST INVISIBLE IP44

Waterproof version.
IP44 protection rating.



POINT ST WALL

For wall lighting.

Vector Light lens directs light at a 60° angle.
With or without a frame.






POINT ST SOFT

Light diffusion and decorative function.

With or without a frame.

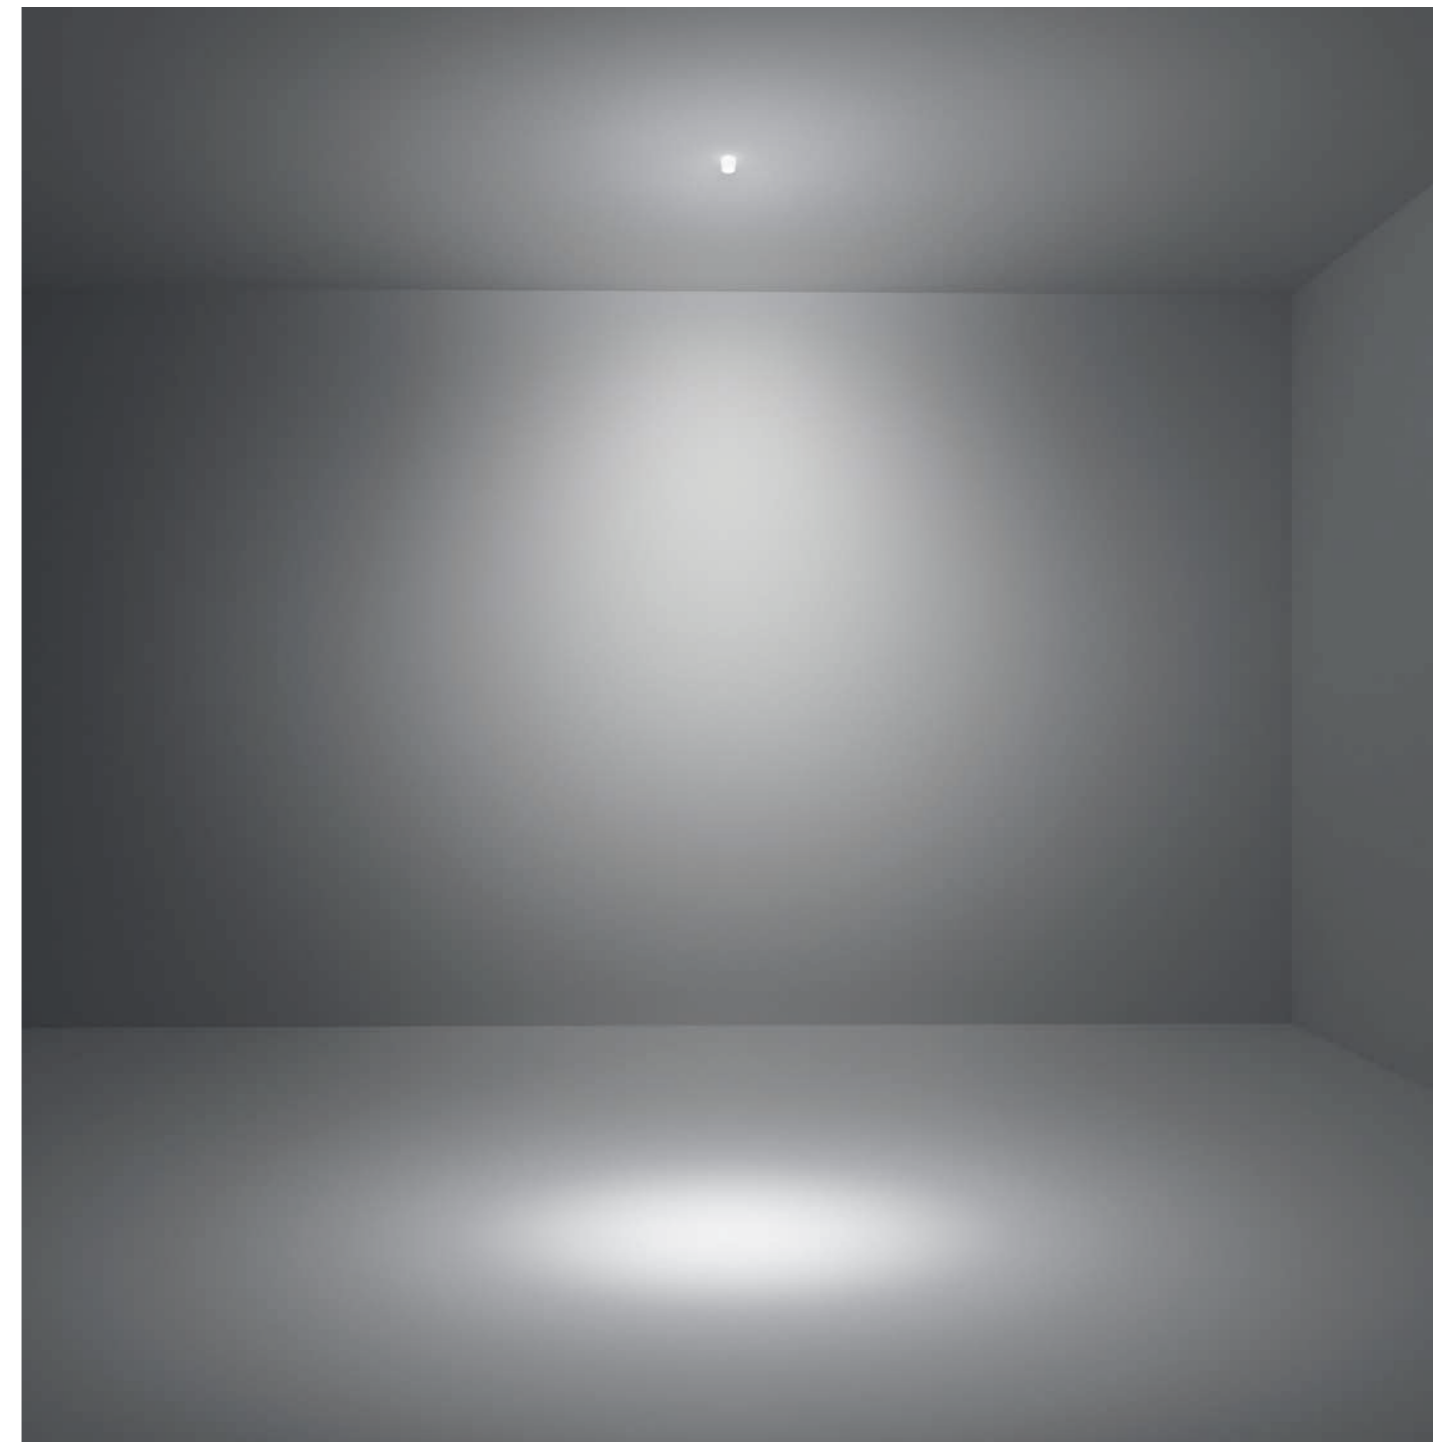





POINT SR IP44 GLASS

Protective glass stands out from the ceiling surface.

Waterproof version with IP44 moisture protection.

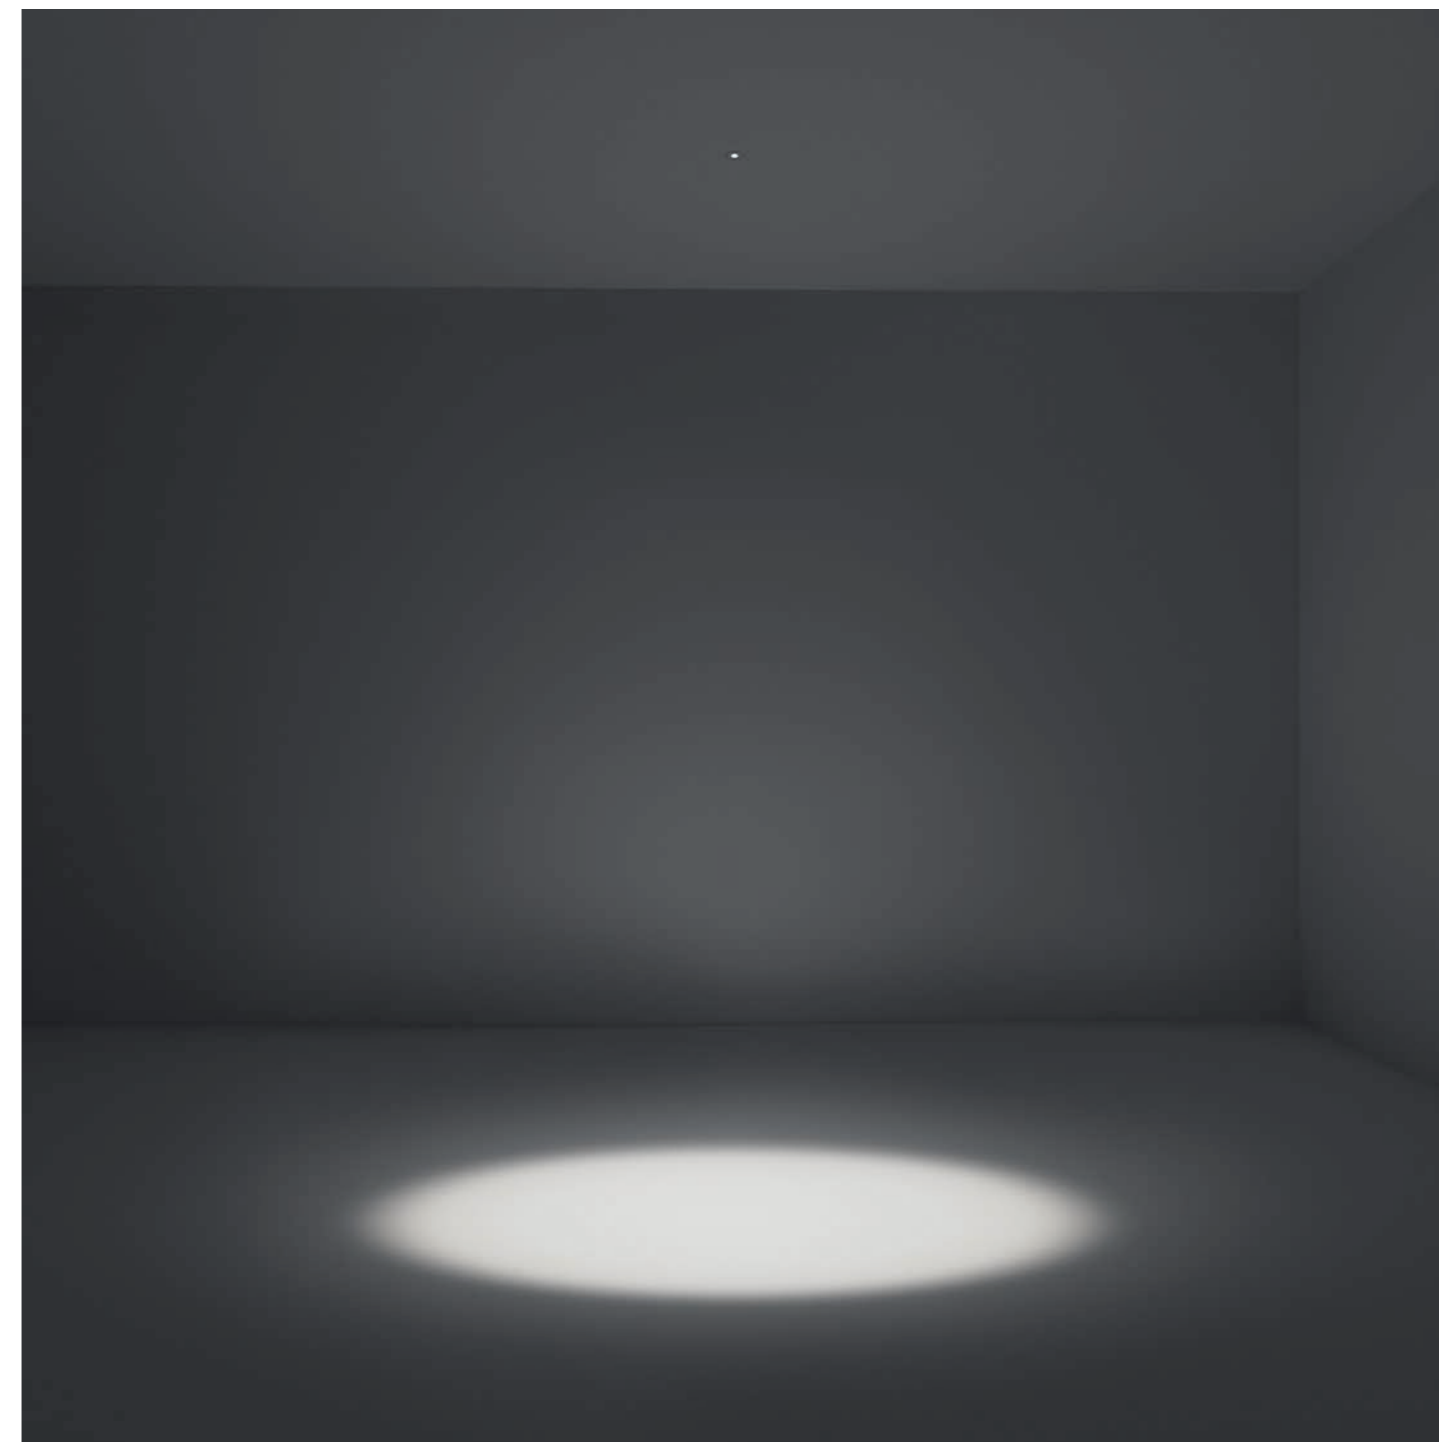


**POINTS
SPOT**



POINT ST 0830 50°


8W 680lm 3000K CRI90
50° IP40 220V



POINT SR 0830 50°


8W 680lm 3000K CRI90
50° IP40 220V

**POINT S
INVISIBLE**



POINT ST INVISIBLE 0830 50°


8W 480lm 3000K CRI90
50° IP40 220V



POINT SR INVISIBLE 0830 50°


8W 480lm 3000K CRI90
50° IP40 220V

**POINTS
WALL**



POINT ST WALL 0630


6W 320lm 3000K CRI90
25x46° IP40 220V



POINT SR WALL 0630


6W 320lm 3000K CRI90
25x46° IP40 220V

**POINT S
SOFT**



POINT ST SOFT 0630 15°


6W 480lm 3000K CRI90
15° IP40 220V



POINT SR SOFT 0630 15°

6W 480lm 3000K CRI90
15° IP40 220V


**POINT ST
INVISIBLE IP44**



POINT ST INVISIBLE IP44 0830 50°

8W 440lm 3000K CRI90
50° IP44 220V

**POINT SR
IP44 GLASS**



POINT SR IP44 GLASS 0630 50°

6W 480lm 3000K CRI90
50° IP44 220V



Installation manuals, video,
examples, and actual prices are
available at our website
www.centrsvet.ru.
Scan the QR code with your phone.

Three colour temperatures are available:
2700K / 3000K / 4000K.

Colours: White Sand / Black Sand / White Pearl /
Black Pearl.
Colour caps are available as an option.

The fixture is equipped with a power supply
without dimming.

A power supply with dimming is available as an
option: TRIAC 220 V or DALI.

POINT M



2700K

4000K

3000K-1800K DTW

3000K-1800K DTW IP44

UNDER PLASTER

WITH FRAME



FRAME POINT MT




FRAME POINT MR



COVER POINT S



- WD - WHITE SAND
- BD - BLACK SAND
- WP - WHITE PEARL
- BP - BLACK PEARL
- GG - GOLDEN GLANCE
- GD - GOLDEN SAND
- CD - COPPER SAND
- CH - CHROME
- CB - BLACK CHROME
- BZ - BRONZE

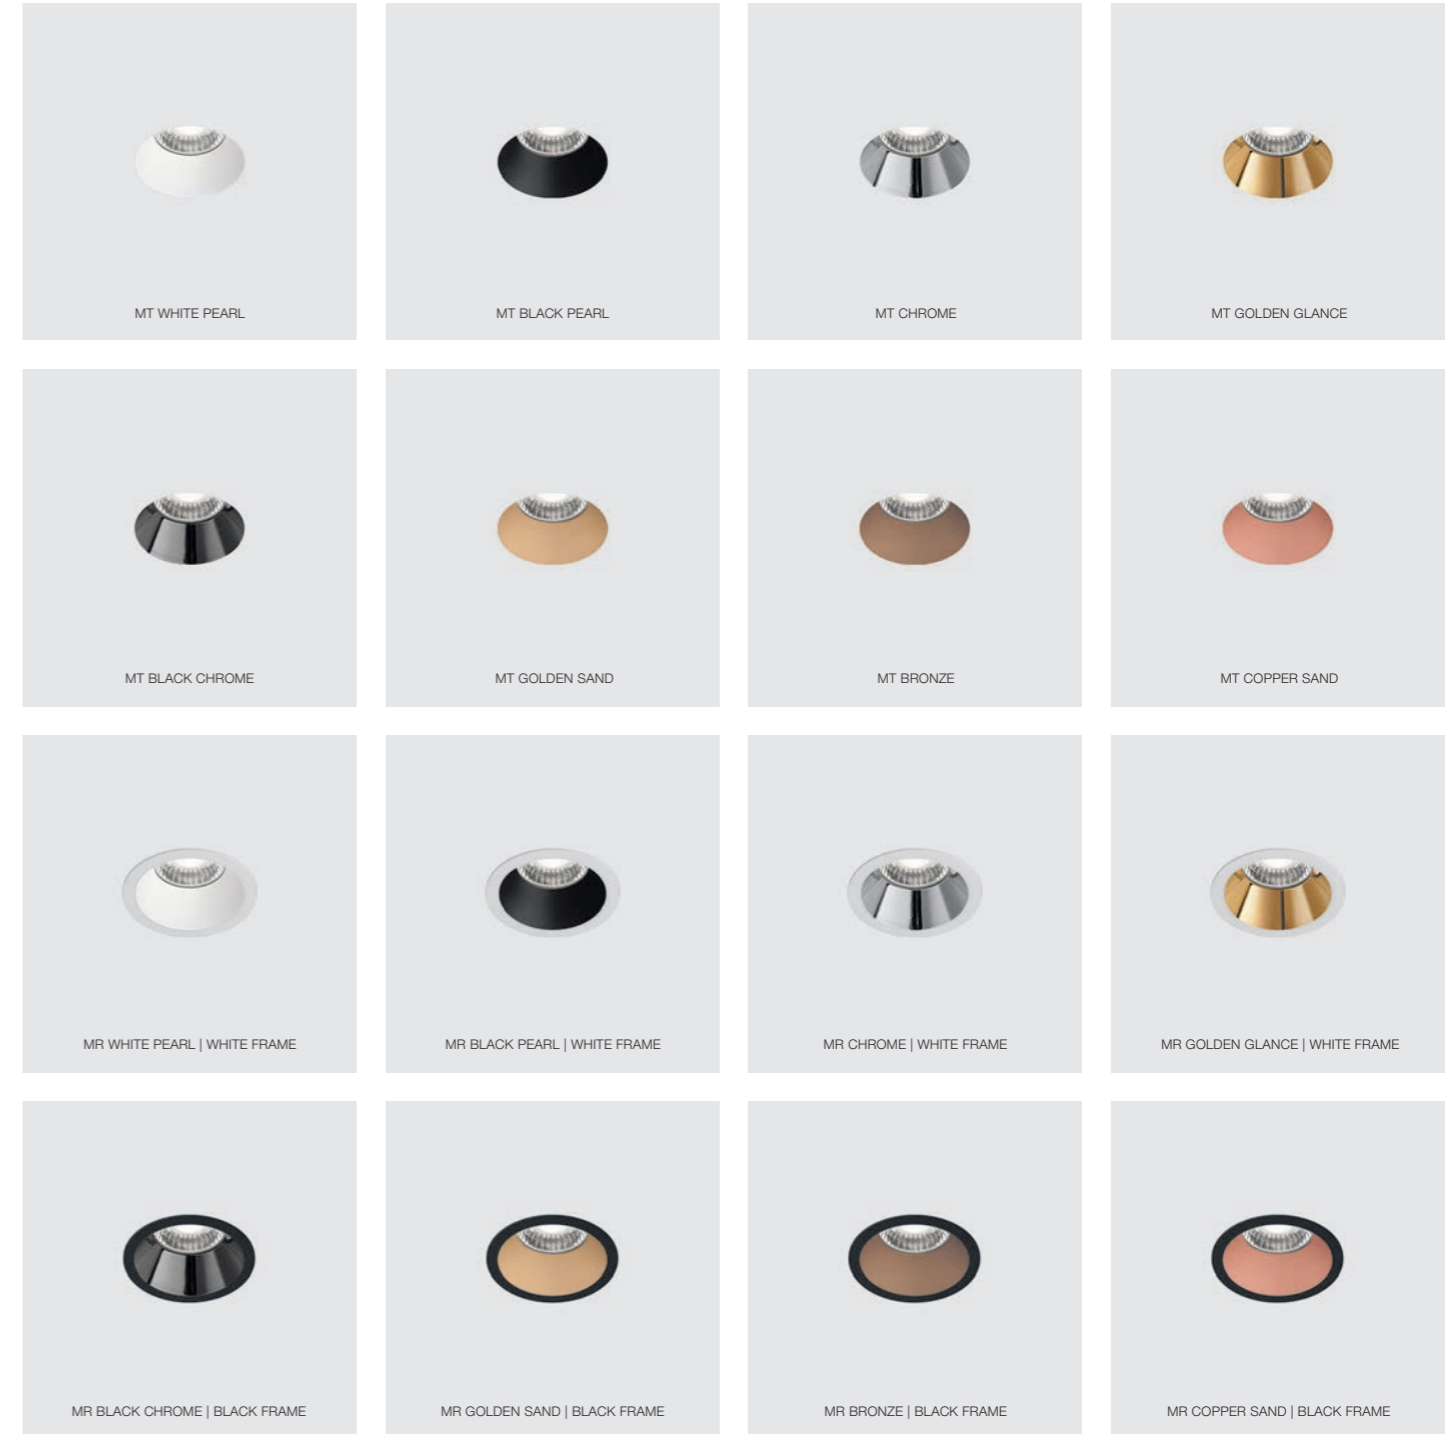

MT WHITE PEARL

MT BLACK PEARL

MT CHROME

MT GOLDEN GLANCE

MT BLACK CHROME

MT GOLDEN SAND

MT BRONZE

MT COPPER SAND

MR WHITE PEARL | WHITE FRAME

MR BLACK PEARL | WHITE FRAME

MR CHROME | WHITE FRAME


MR GOLDEN GLANCE | WHITE FRAME

MR BLACK CHROME | BLACK FRAME

MR GOLDEN SAND | BLACK FRAME

MR BRONZE | BLACK FRAME

MR COPPER SAND | BLACK FRAME

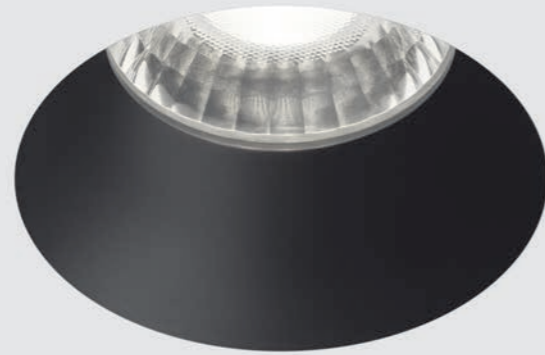

POINT MT

Frameless fixture.
Invisible transition between the fixture
body and the ceiling.

High power: 20W.

Special Pure Light lens maintains colour
uniformity during dimming.

Recessed light source ensures a high
level of comfort lighting.




POINT MR

Frame fixture.
Invisible transition between the fixture
body and the ceiling.

High power: 20W.

Special Pure Light lens maintains
colour uniformity during dimming.


Recessed light source ensures a high
level of comfort lighting.

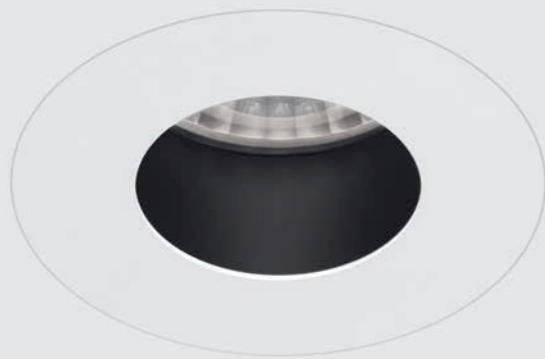

POINT MT INVISIBLE

The fixture is not visible on the ceiling surface.
Painting in the colour of the ceiling is possible.

With or without a frame.

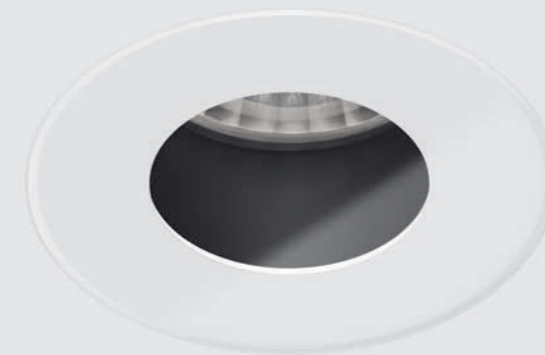

POINT MR GLASS

IP44 waterproof version.
With protective glass.

Suited for installation in bathrooms, showers,
and other areas with high humidity.


EASY MOUNTING

To facilitate installation, we developed a special tool with two-level bits.




1.


The frame is installed slightly deeper than the ceiling level. Invisible under a minimum plaster layer.

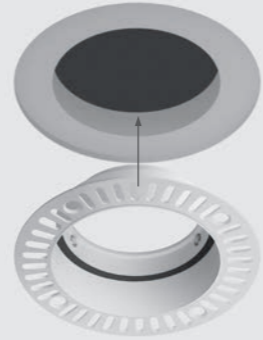

2.

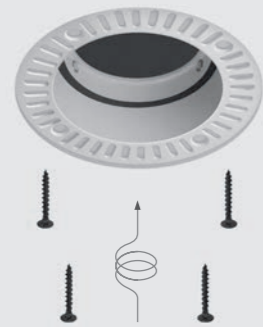

3.



4.

Final finishing.




5. Mount the fixture to the safety wire.



6. Connect to the 220V mains and install.




7. Just turn the fixture in the mounting frame to fix it.



Frameless design.
Modern minimalistic design.

**DTW
TECHNOLOGY**

New generation LEDs with Dim to Warm (DTW) function.

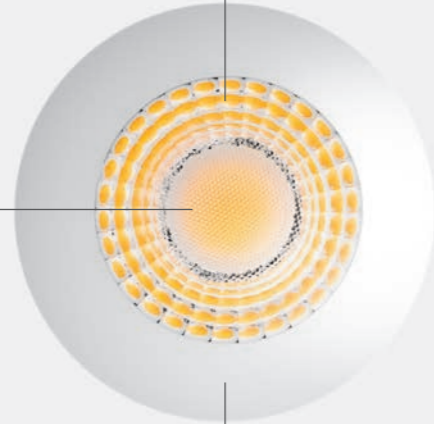

**PURE LIGHT
OPTICAL LENS**

Many facets ensure a clean
and even light.

EXCLUSIVE CAPS


Magnet mounting.
Easy to remove without damaging the final
finishing.
Selection of different colours.



Anti-glare Honeycomb Louver




Softening Lens

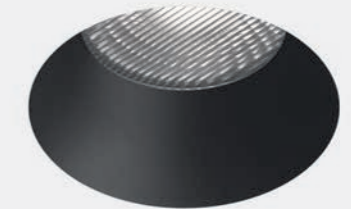


Linear Spread Lens

**OPTIONAL
ACCESSORIES**

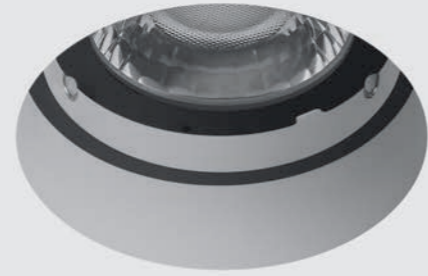


EXCLUSIVE CAPS

Magnet mounting.
Easy to remove without damaging the
final finishing.

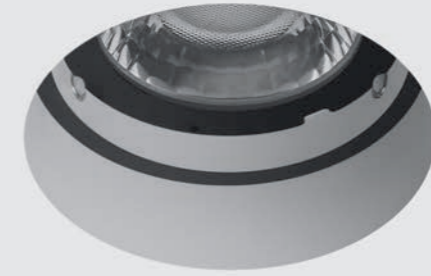

**POINT M
WITHOUT FRAME**



POINT MT 2027 36° DIM

20W 1620lm 2700K CRI90
36° IP40 220V DIM 220

POINT MT 2040 36° DIM

20W 1680lm 4000K CRI90
36° IP40 220V DIM 220


POINT MT 20DTW 36°

20W 1420lm 3000-1800K CRI90
36° IP40 220V DIM 220

POINT MT IP44 20DTW 36°

20W 1420lm 3000-1800K CRI90
36° IP44 220V DIM 220

**POINT M
WITH FRAME**



POINT MR 2027 36° DIM

20W 1620lm 2700K CRI90
36° IP40 220V DIM 220

POINT MR 2040 36° DIM

20W 1680lm 4000K CRI90
36° IP40 220V DIM 220

POINT MR 20DTW 36°

20W 1420lm 3000-1800K CRI90
36° IP40 220V DIM 220

POINT MR IP44 20DTW 36°

20W 1420lm 3000-1800K CRI90
36° IP44 220V DIM 220



Installation manuals, video,
examples, and actual prices are
available at our website [www.
centrsvet.ru](http://www.centrsvet.ru).

Scan the QR code with your phone.

Three colour temperatures are available:
2700K / 3000K / 4000K.

Colours: White Pearl / Black Pearl, optional
colour caps.

Power supply with dimming.

The DALI power supply with dimming is
available as an option.

POINT XL



UNDER PLASTER

WITH FRAME




FRAME POINT XL TR FRAME POINT XL TS FRAME POINT XL 2TS FRAME POINT XL RR FRAME POINT XL RS FRAME POINT XL 2RS



COVER POINT XL R WD COVER POINT XL S WD COVER POINT XL R BD COVER POINT XL S BD


○ WD - WHITE SAND
● BD - BLACK SAND

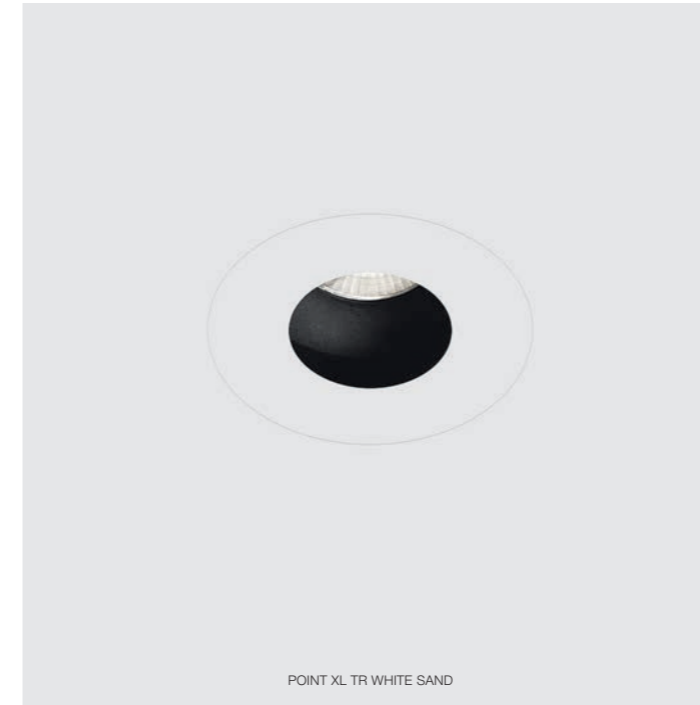

POINT XL TR WHITE SAND



POINT XL TR BLACK SAND

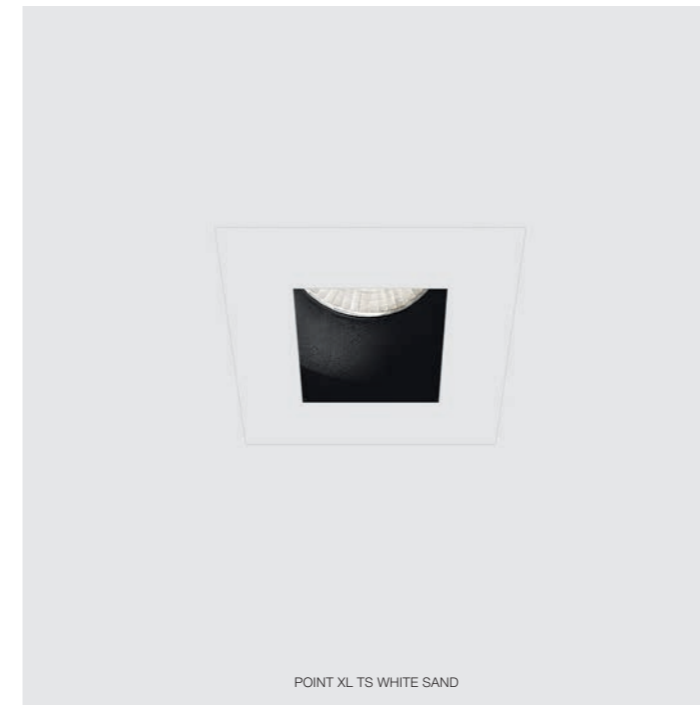

POINT XL TS WHITE SAND



POINT XL TS BLACK SAND



POINT XL TR

Frameless fixture.
Virtually invisible transition between
the fixture body and the ceiling.

High power: 34W.

Recessed light source ensures
a high level of comfort lighting.





POINT XL RR


Frame fixture.
Easy mounting at any stage.

High power: 34W.

Recessed light source ensures
a high level of comfort lighting.

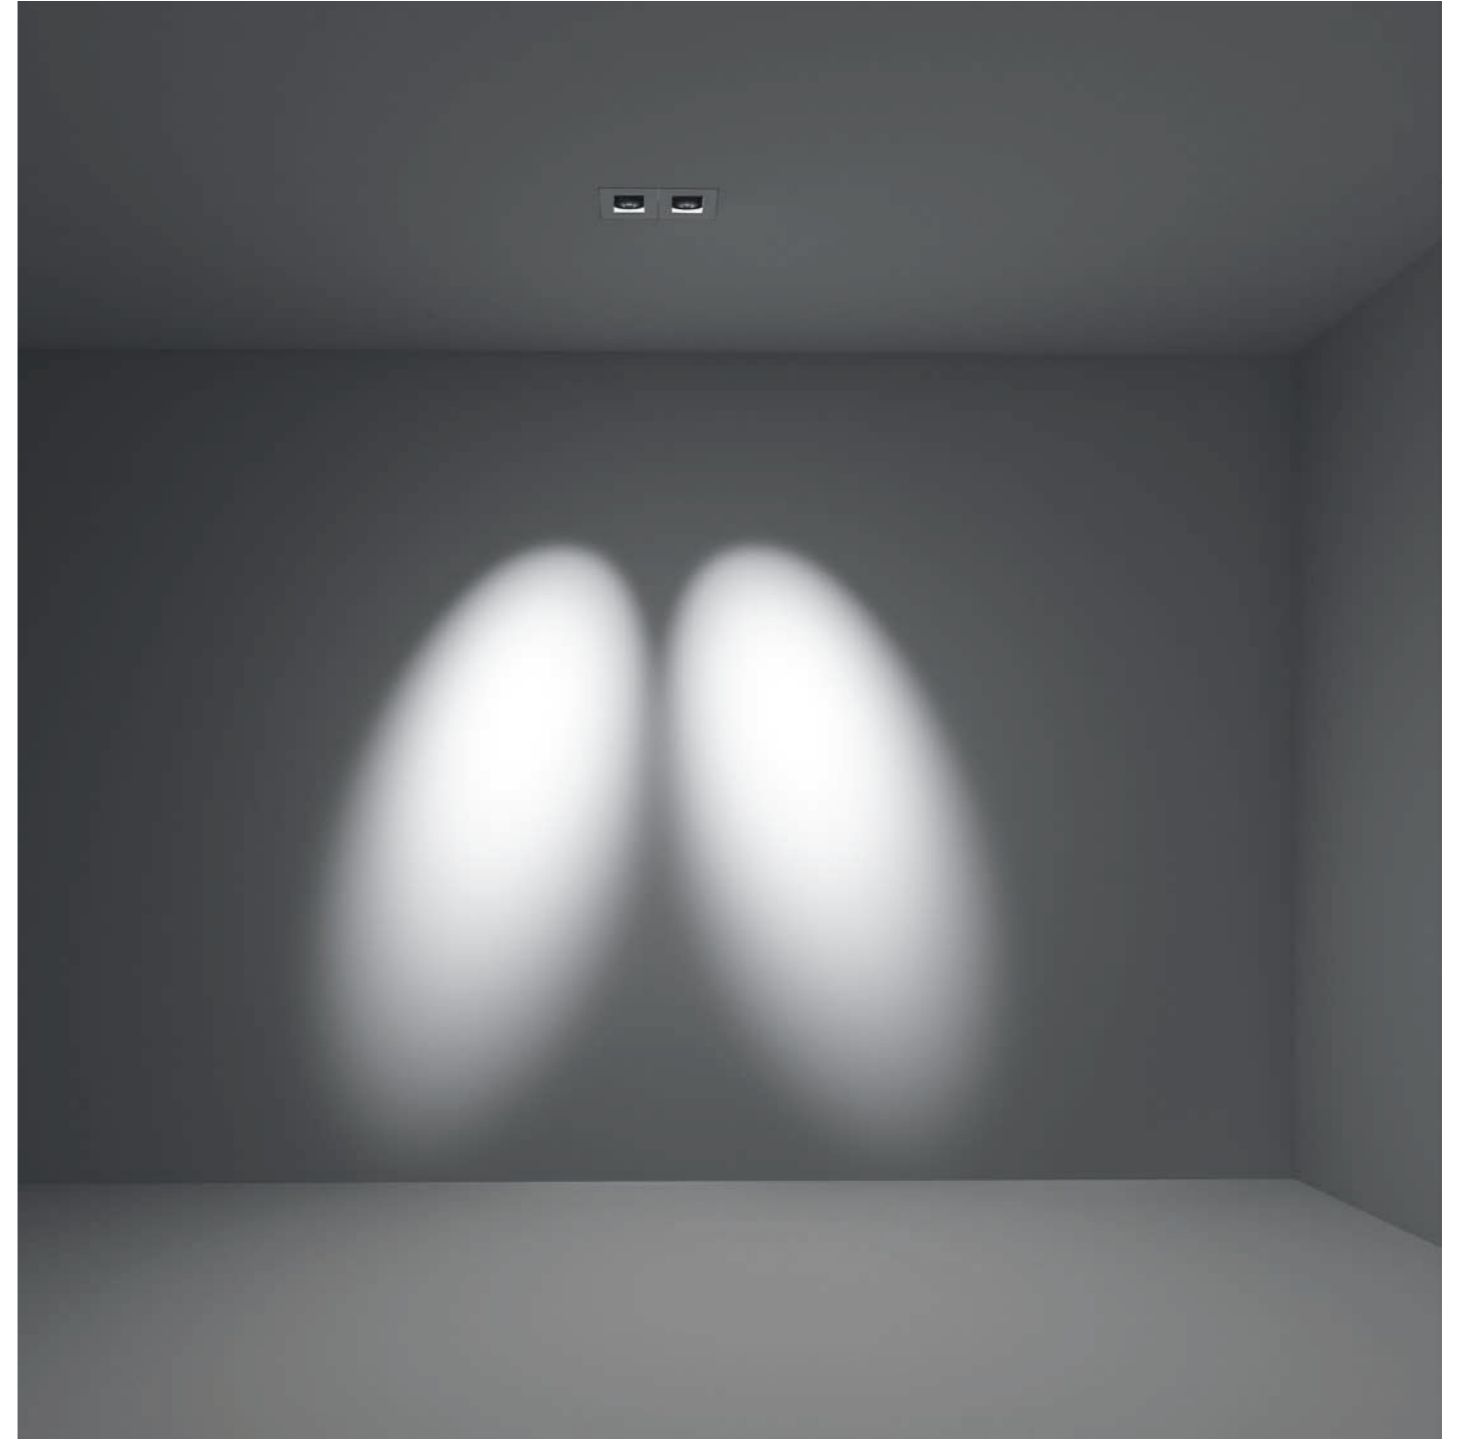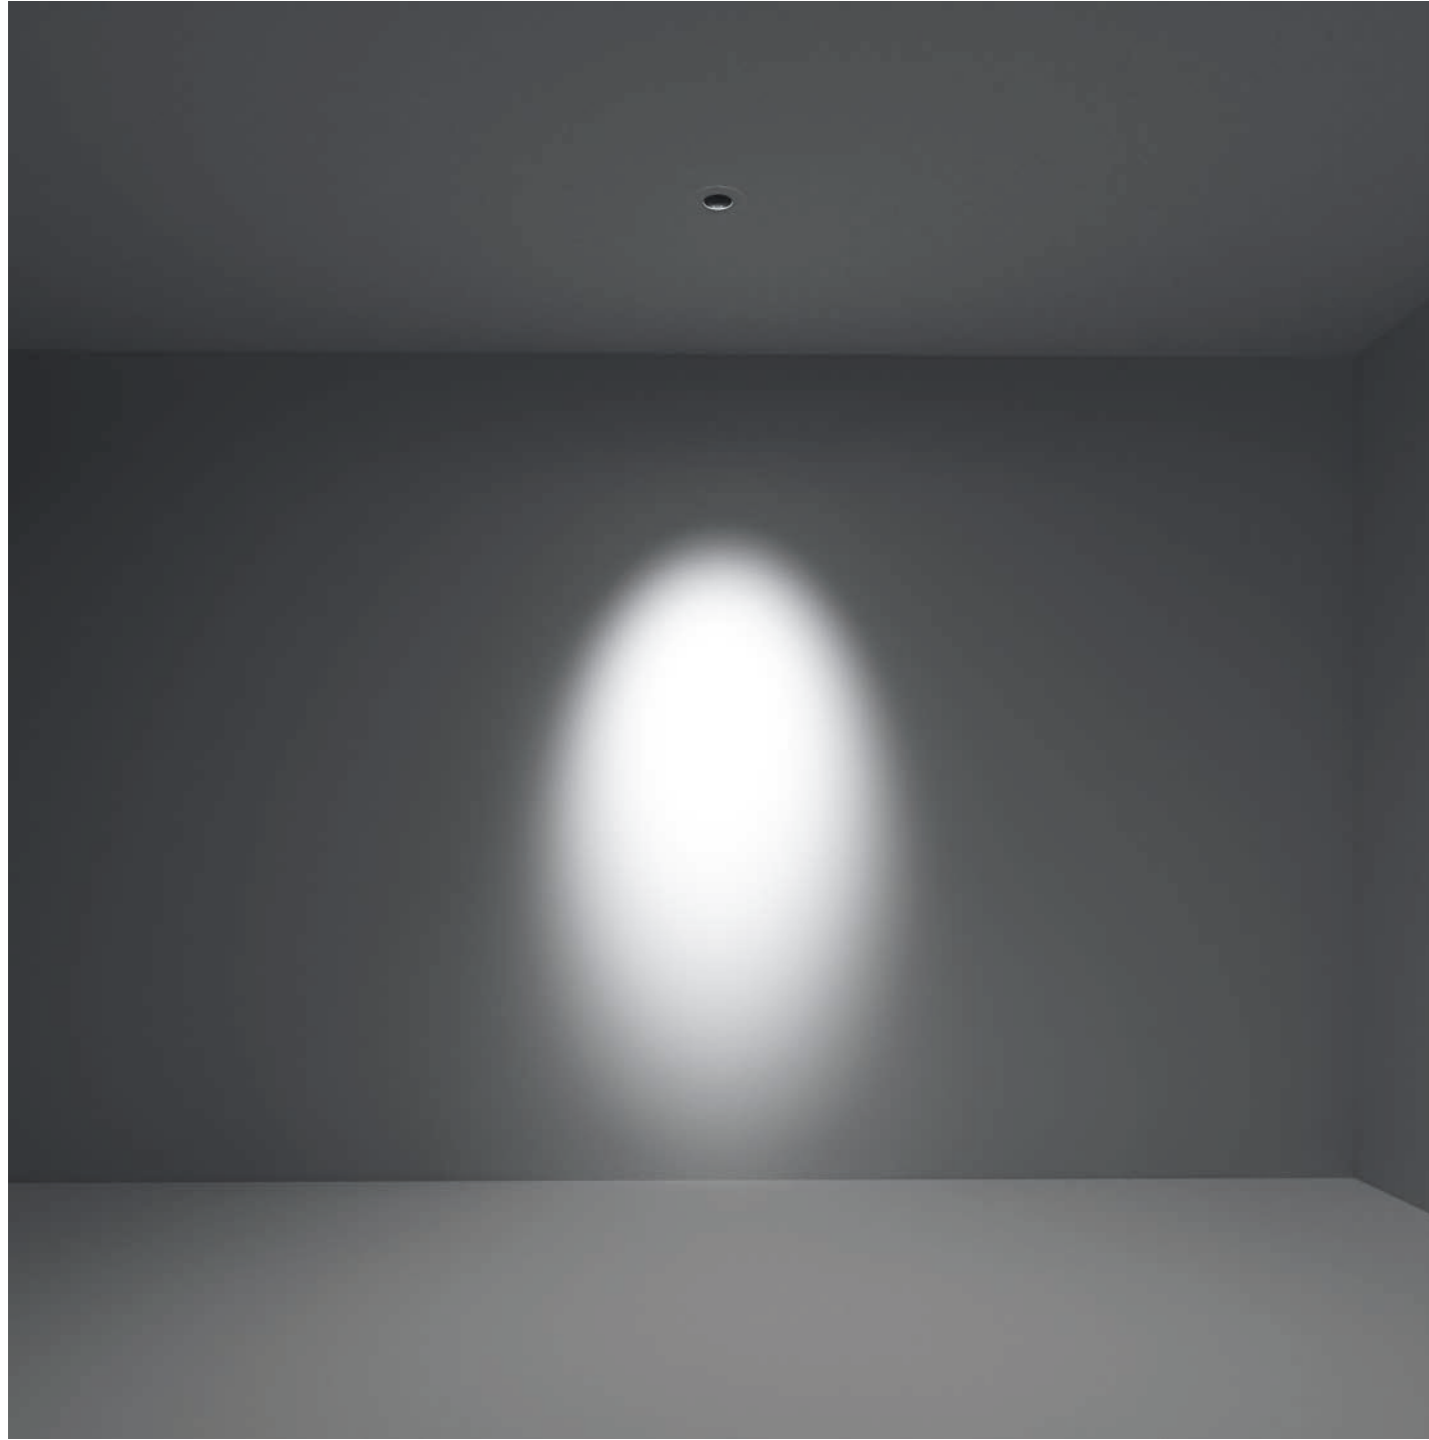


**POINT XL
WITHOUT FRAME**

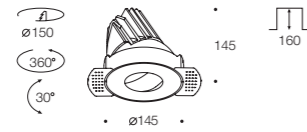


POINT XL TR 3430 30° DIM

34W 2200lm 3000K CRI90
30° IP40 220V DIM 220

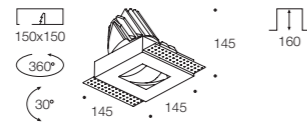

POINT XL TS 3430 30° DIM


34W 2200lm 3000K CRI90
30° IP40 220V DIM 220

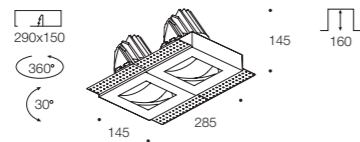

POINT XL 2TS 6830 30° DIM


68W 4400lm 3000K CRI90
30° IP40 220V DIM 220

**POINT XL
WITH FRAME**

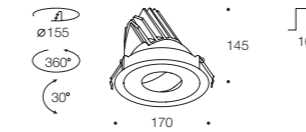


POINT XL RR 3430 30° DIM

34W 2200lm 3000K CRI90
30° IP40 220V DIM 220

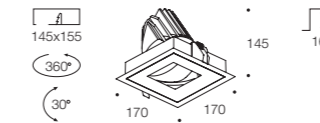

POINT XL RS 3430 30° DIM

34W 2200lm 3000K CRI90
30° IP40 220V DIM 220

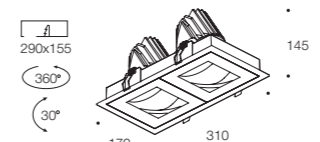

POINT XL 2RS 6830 30° DIM

68W 4400lm 3000K CRI90
30° IP40 220V DIM 220



Installation manuals, video,
examples, and actual prices are
available at our website
www.centrsvet.ru.

Scan the QR code with your phone.

Three colour temperatures are available:
2700K / 3000K / 4000K.

Colours: White Sand / Black Sand.

Power supply with dimming.

The DALI power supply with dimming is
available as an option.



Description of the patent utility model is available
on the website of the Federal Service for Intellectual Property.

All materials (texts, photos, etc.) used in the catalogue are the sole property of Centrsvet LLC and are copyrighted. Reprinting, copying, and any other usage are allowed only with the express permission of the copyright holder. All installation aspects shall be referred only to the installation manual supplied with the fixture and/or available on the website www.centrsvet.ru.



Installation manuals, video, examples, and actual prices
are available at our website www.centrsvet.ru.

Scan the QR code with your phone.