

° fool moon

People have always been fascinated by the light of a perfect circle. The returning full moon and the natural phenomena ascribed to it (higher childbirth percentage, fertility, transformation from human to animal, etc.), the archetypical form of a UFO, the shape of a gong, the sun... are but a few striking examples. Despite its shape of a full circle ('full moon'), the lamp can be used in several positions: horizontally, diagonally, obliquely or vertically ('fool moon'). Thanks to its large dimensions, the lamp is easily recognisable and has the possibility of demarcating or creating spaces. The lamp also has a highly symbolic value due to its imposed abstraction.

Design by Bart Lens









fool moon wall 1 / Mendeli Street Hotel, Tel-Aviv - ST-OR - lighting designer Ailon Gavish, Studio Twilight - photograph by Omri Amsalem


















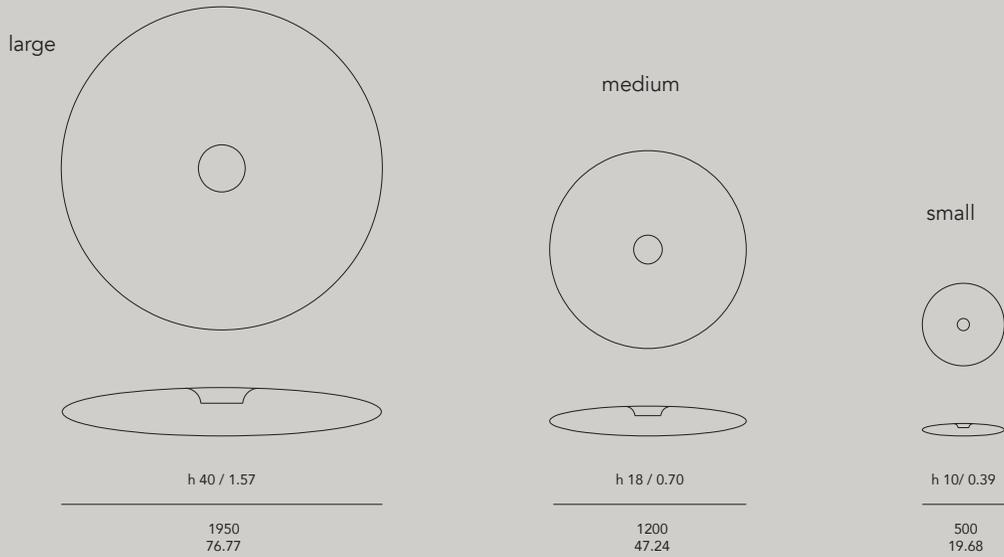

°fool moon large



FM.L.LED.WW.10V	Fool Moon large LED 2700K dimmable 0/1-10V, 90W 110-264VAC
FM.L.LED.WW.DAL	Fool Moon large LED 2700K dimmable DALI, 90W 110-264VAC
FM.L.LED.WW.000	Fool Moon large LED 2700K not dimmable 90W 110-264VAC
FM.L.LED.WW2.10V	Fool Moon large LED 3000K dimmable 0/1-10V, 90W 110-264VAC
FM.L.LED.WW2.DAL	Fool Moon large LED 3000K dimmable DALI, 90W 110-264VAC
FM.L.LED.WW2.000	Fool Moon large LED 3000K not dimmable 90W 110-264VAC
FM.L.355.RGB.DMX	3 x PL 55W + RGB LED - DMX controllable
FM.L.355.RGB.DAL	3 x PL 55W + RGB LED - DALI controllable
FM.L.355.RGB.M	3 x PL 55W + RGB LED - master with remote control
FM.L.355.RGB.S	3 x PL 55W + RGB LED - slave (master required)

°fool moon medium



FM.M.LED.WW.10V	Fool Moon medium LED 2700K dimmable 0/1-10V, 52W 110-264VAC
FM.M.LED.WW.DAL	Fool Moon medium LED 2700K dimmable DALI, 52W 110-264VAC
FM.M.LED.WW.000	Fool Moon medium LED 2700K not dimmable 52W 110-264VAC
FM.M.LED.WW2.10V	Fool Moon medium LED 3000K dimmable 0/1-10V, 52W 110-264VAC
FM.M.LED.WW2.DAL	Fool Moon medium LED 3000K dimmable DALI, 52W 110-264VAC
FM.M.LED.WW2.000	Fool Moon medium LED 3000K not dimmable 52W 110-264VAC
FM.M.000.RGB.DMX	RGB LED DMX controllable
FM.M.000.RGB.DAL	RGB LED DALI controllable
FM.M.000.RGB.M	RGB LED - master with remote control
FM.M.000.RGB.S	RGB LED - slave (master required)

°fool moon small



FM.S.LED.PHA.US	Fool moon small 3 x LED 6W 2700K, E14 socket, Phase-cut, 110VAC
FM.S.LED.PHA	Fool moon small 3 x LED 6W 2700K, E14 socket, Phase-cut, 230VAC
FM.S.LED.DAL	Fool moon small 3 x LED 6W 2700K, E14 socket, Dimmable Dali, 230VAC
FM.S.RGB.DMX	RGB LED DMX controllable, driver remote (in ceiling)
FM.S.RGB.DAL	RGB LED DALI controllable, driver remote (in ceiling)
FM.S.RGB.M	RGB LED - master with remote control
FM.S.RGB.S	RGB LED - slave (master required)

material: PE - weight L: 33 kg - 1164 oz - weight M: 20 kg - 705 oz - weight S: 3 kg - 105 oz

FM large max. 200W - FM medium max. 72W - FM small max. 15W - 230VAC

included: 2 m cable, ceiling rose and suspension elements





°fool moon wall type



FM.S.3LED.WALL1	3 x led 6W, E14 socket, phase-cut dimmable, 2700K
FM.S.3LED.WALL2	3 x led 6W, E14 socket, phase-cut dimmable, 2700K

materials: PE & steel - weight: 4,5 kg / 158 oz - 230VAC - max. 15W