

°bloc

The first linear lighting system available in a wide variety of high quality materials to offer a solution to your unique requirements.

Interchangeable °bloc units clip onto a surface mounted track.

Design by etre moderne





*bloc.spot, walnut & brass brushed & *bloc, walnut & white carrara
House, Belgium - architect Pascal François - photograph by Thomas De Bruyne (cafeine.be)



°bloc





°bloc

135




°bloc.spot, bianco carrara & °bloc, oak with custom dye finish
Apartment, Belgium - Rubens-Frederix architecten



*bloc.spot, brushed brass & *bloc, carrara bianco / showroom Lumartes, NYC




*bloc.spot monopoint - brass anodised aluminum brushed

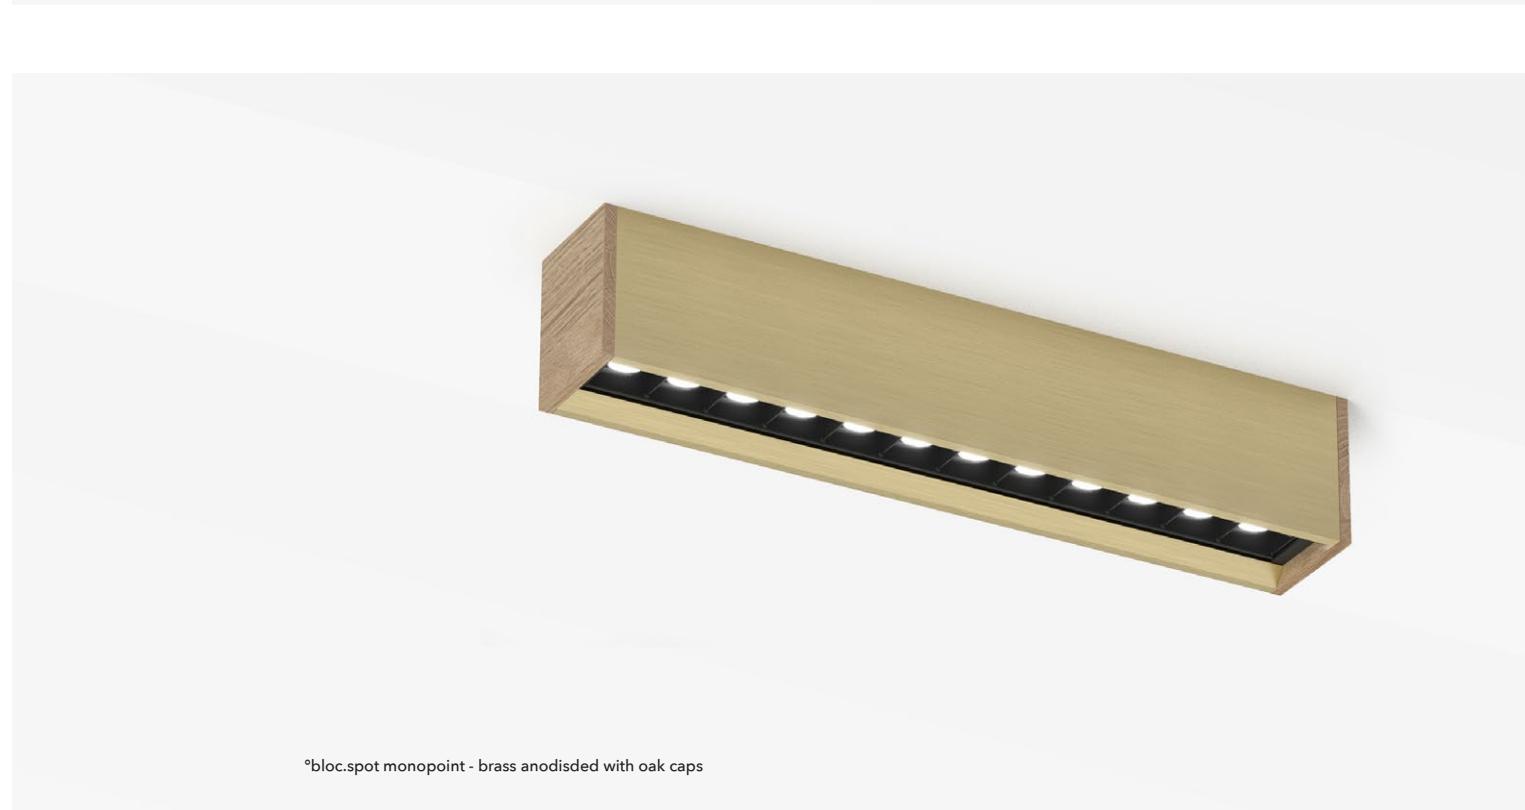

*bloc.spot monopoint - brass anodised with oak caps



°BLOC.STRIPE brass brushed & °BLOC walnut
House Aalst, Belgium - architect Pascal François - photograph by Jeroen Verrecht

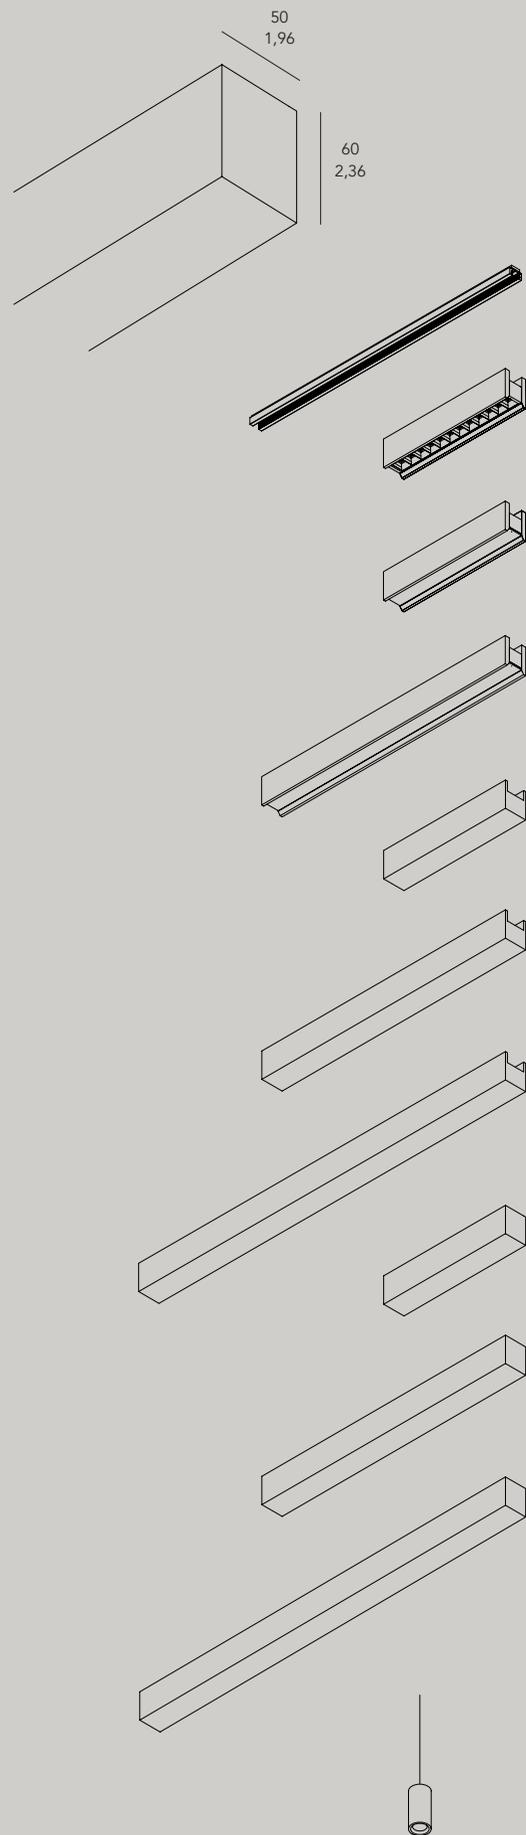

set-up guide

- track

- bloc spot**
300 - 11.81
20° or 40°, both with a black anti-glare louvre

- bloc stripe**
300 - 11.81
frosted ice or microprism diffuser

- bloc stripe**
600 - 23.62
frosted ice or microprism diffuser

- bloc**
300 - 11.81

- bloc**
600 - 23.62

- bloc**
900 - 35.43

- bloc end**
300 - 11.81

- bloc end**
600 - 23.62


- bloc end**
900 - 35.43

- bloc bevel**
55x110
2.16x4.33

°bloc

Accessories

- 20252.0000 bloc track pendant 2 m cable suspension (incl cable)
- 20253.0000 bloc track pendant 2 m cable suspension
- 20254.0000 bloc track pendant 2 m bar suspension (incl cable)
- 20255.0000 bloc track pendant 2 m bar suspension

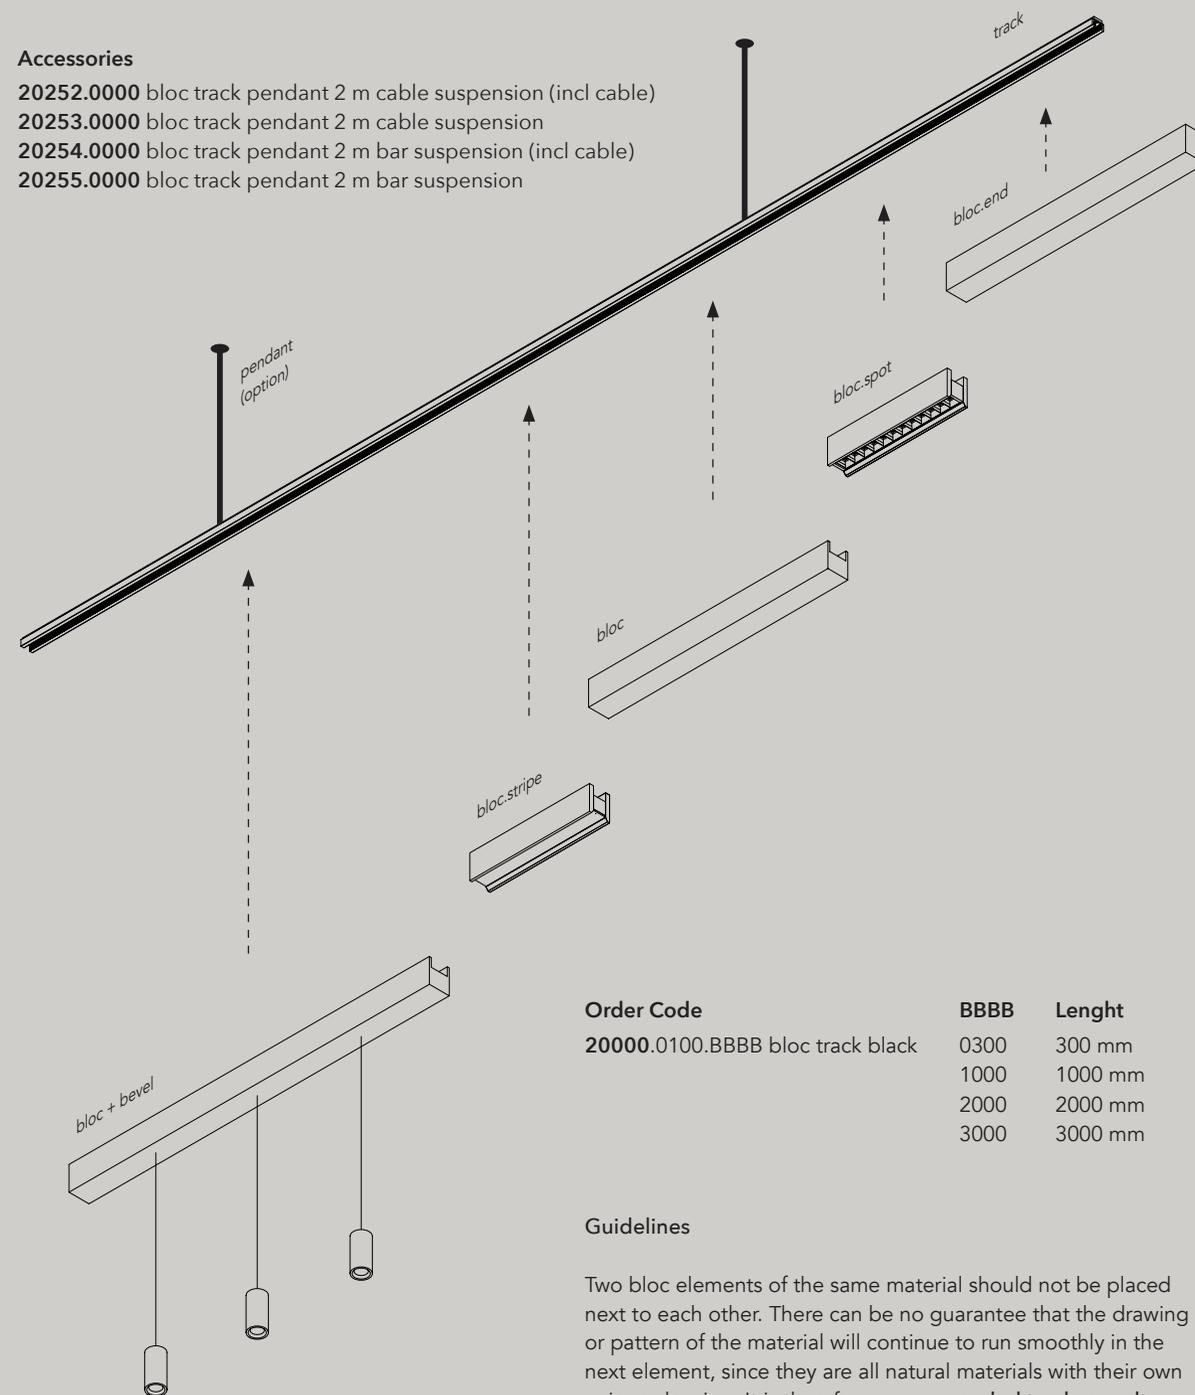


Order Code	BBBB	Lenght
20000.0100.BBBB bloc track black	0300	300 mm
	1000	1000 mm
	2000	2000 mm
	3000	3000 mm

Guidelines

Two bloc elements of the same material should not be placed next to each other. There can be no guarantee that the drawing or pattern of the material will continue to run smoothly in the next element, since they are all natural materials with their own unique drawing. It is therefore **recommended to always alternate between the materials.**

A bloc.stripe or a bloc.spot should be placed between two elements without light (full material). **It is recommended not to place two elements with light next to each other.**


A bloc.spot or bloc.stripe should never be used at the end of the track, unless the end of the track fits against a wall.

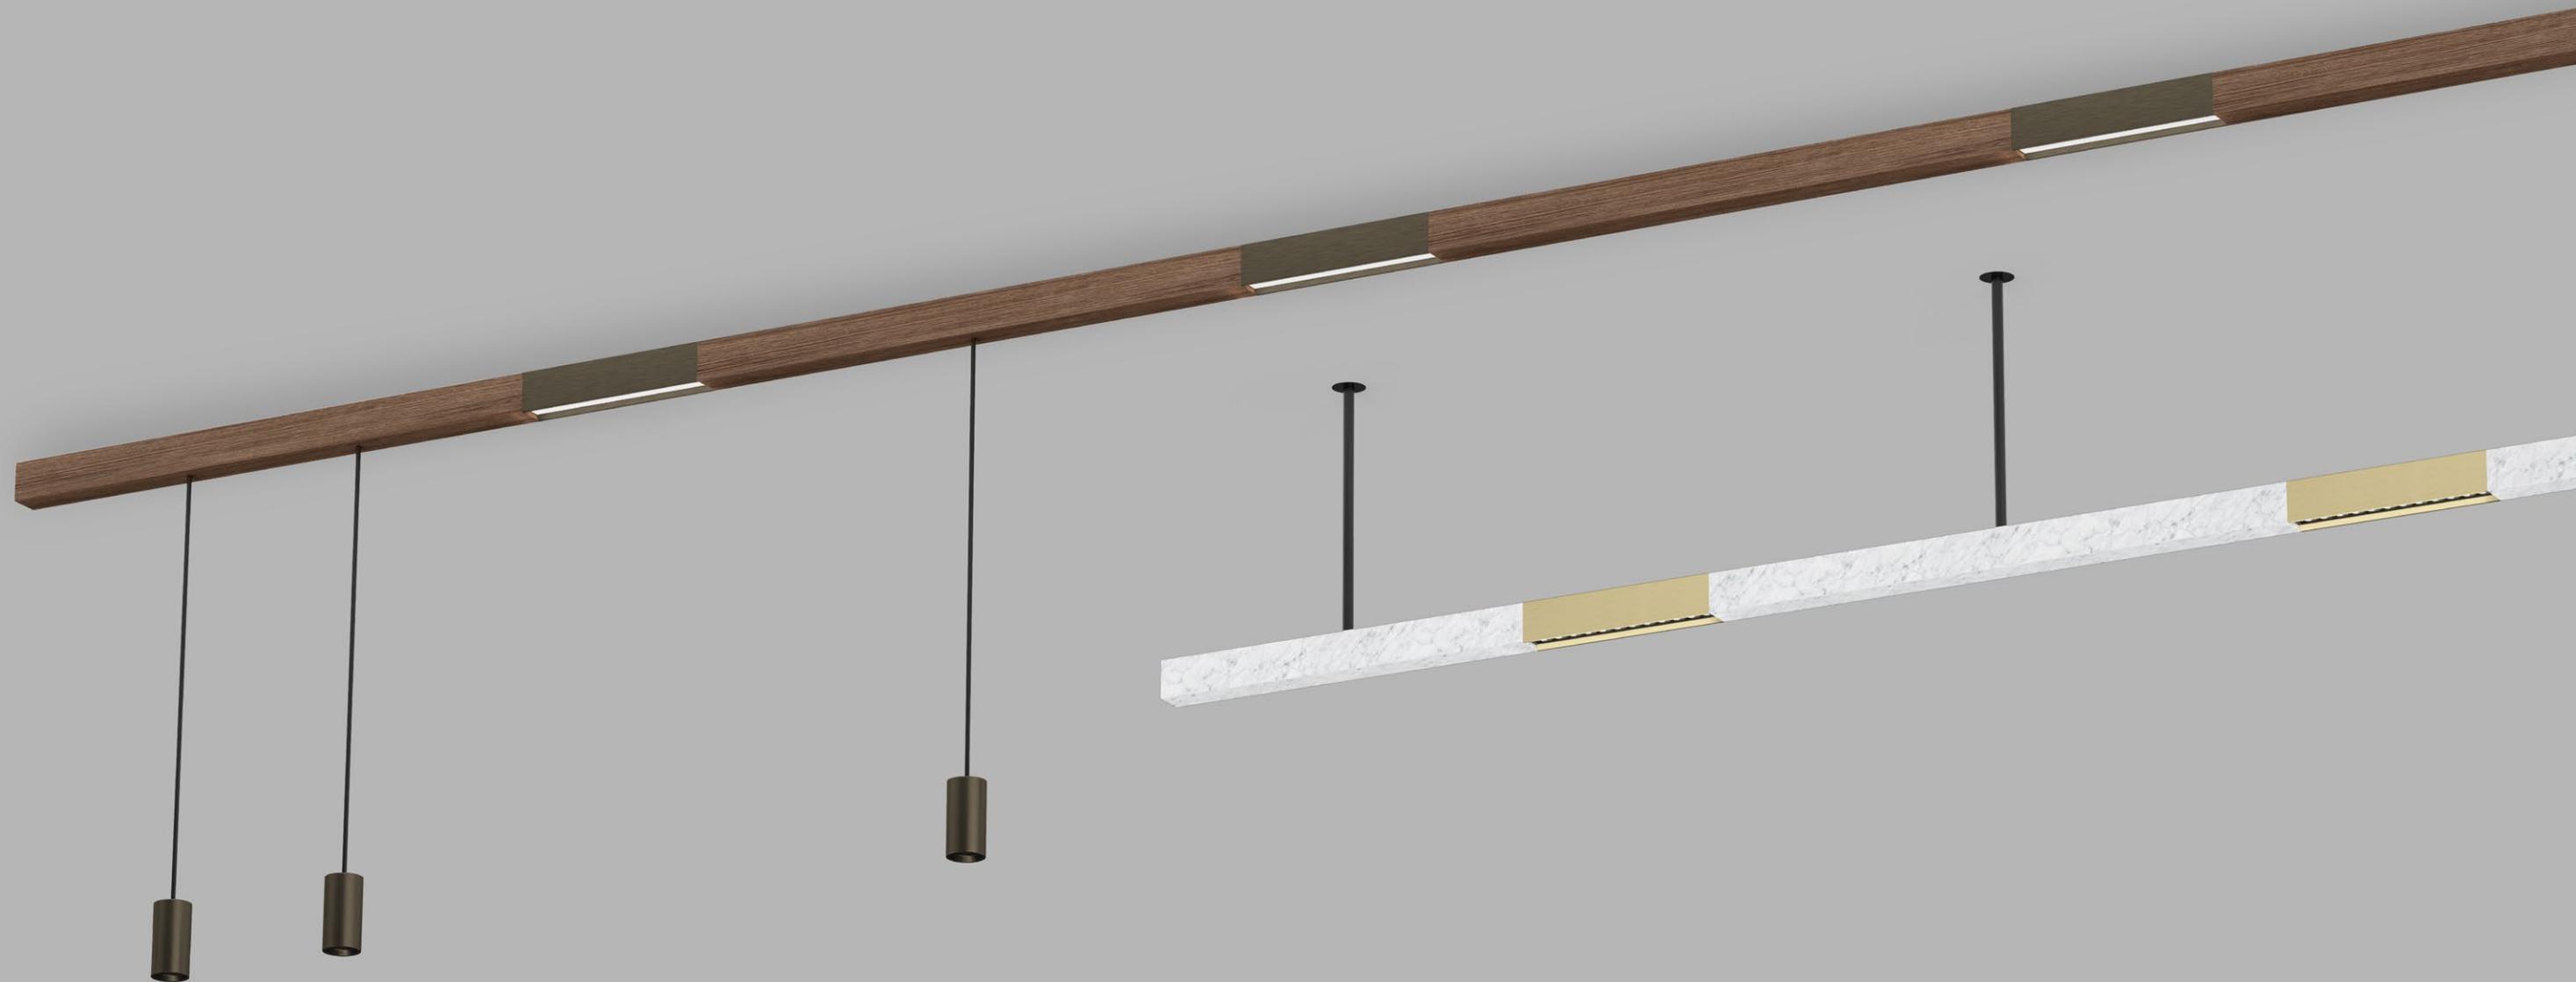

°bloc.spot

materials aluminium coated or anodised / PC
 weight from 0,5-5kg
 voltage 48 Vdc
 ugr <10
 wattage 13W - 26W (high output)
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google home & amazon Alexa*
 *from Q3 2020

IP20   



Order Code

- 20300.AA00.BBBB.CCC.DD bloc spot 300
- 20301.AA00.BBBB.CCC.DD bloc spot 300 high output*
- 20302.AA00.BBBB.CCC.DD bloc spot 300 monopoint
- 20303.AA00.BBBB.CCC.DD bloc spot 300 monopoint high output*

*only available for alu anodised finish & black/white paint



°bloc spot - brass alu anodised brushed + carrara bianco



natural alu anodised brushed + oak intense black dye

bronze alu anodised brushed + oak classic brown dye


AA	Finish		
01	black		
02	white		
21	black alu anodised brushed		
22	natural alu anodised brushed		
23	brass alu anodised brushed		
25	bronze alu anodised brushed		
26	dark bronze alu anodised brushed		
30	brass brushed	on request	
31	brass polished	on request	
40	walnut, natural waxed	on request	
41	oak natural, natural waxed	on request	
42	oak classic brown dye	on request	
43	oak intense black dye	on request	
61	carrara bianco extra, honed	on request	
BBBB	Light		
9527	cri >95, 2700K		
9530	cri >95, 3000K		
9540	cri >95, 4000K - on request		
CCC	Optic	Output	High output*
200	20 deg	1090lm - 5650cd	1870lm - 9770cd
300	30 deg	1055lm - 3310cd	1820lm - 5750cd
600	60 deg	1090lm - 1200cd	1870lm - 2060cd
DD	Dimming		
ND	no dimming		
DA	dali (0/1-10V, switchDIM, Casambi through interface)		

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°bloc.stripe

materials aluminium coated or anodised / PC
 weight from 0,5-5kg
 voltage 48 Vdc
 wattage 8,2W - 16,4W (high output)
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google home & amazon Alexa*
 *from Q3 2020

IP20   

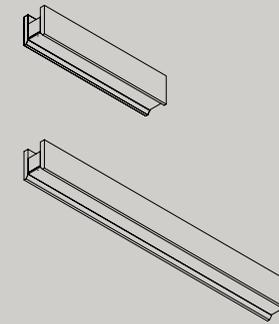

Order Code

- 20400.AA00.BBBB.CCC.DD bloc stripe 300
- 20401.AA00.BBBB.CCC.DD bloc stripe 300 high output*
- 20402.AA00.BBBB.CCC.DD bloc stripe 300 monopoint
- 20403.AA00.BBBB.CCC.DD bloc stripe 300 monopoint high output*

- 20410.AA00.BBBB.CCC.DD bloc stripe 600
- 20411.AA00.BBBB.CCC.DD bloc stripe 600 high output*
- 20412.AA00.BBBB.CCC.DD bloc stripe 600 monopoint
- 20413.AA00.BBBB.CCC.DD bloc stripe 600 monopoint high output*

*only available for alu anodised finish & black/white paint



°bloc stripe 300 - brass alu anodised brushed + natural oak



°bloc stripe 600 - brass alu anodised brushed + carrara bianco



natural alu anodised brushed + oak intense black dye



bronze alu anodised brushed + oak classic brown dye


AA	Finish	
01	black	
02	white	
21	black alu anodised brushed	
22	natural alu anodised brushed	
23	brass alu anodised brushed	
25	bronze alu anodised brushed	
26	dark bronze alu anodised brushed	
30	brass brushed	on request
31	brass polished	on request
40	walnut, natural waxed	on request
41	oak natural, natural waxed	on request
42	oak classic brown dye	on request
43	oak intense black dye	on request
61	carrara bianco extra, honed	on request

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output	High output*
001	frosted ice	880lm - 310cd	1610lm - 560cd
002	microprism	780lm - 370cd	1430lm - 680cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

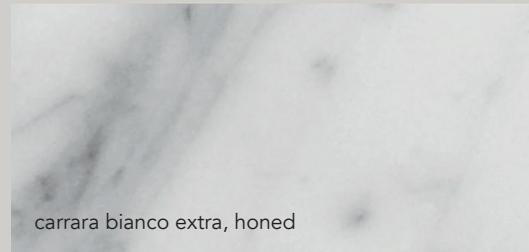

carrara bianco extra, honed



walnut, natural waxed



natural alu anodised




brass alu anodised




bronze alu anodised



dark bronze alu anodised

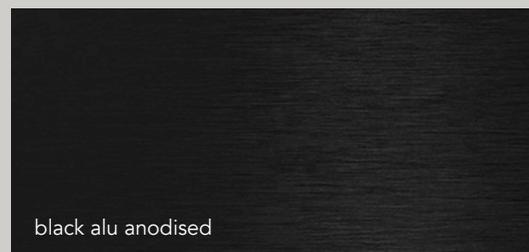

black alu anodised

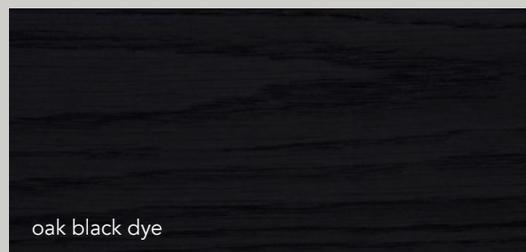




oak black dye






oak natural, natural waxed



oak classic brown dye

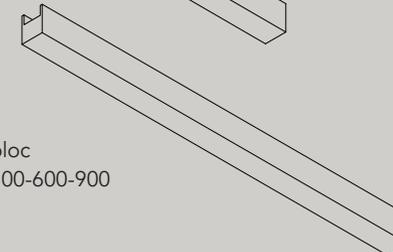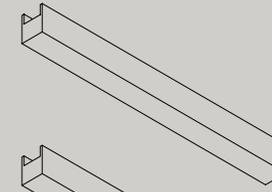

bloc
300-600-900

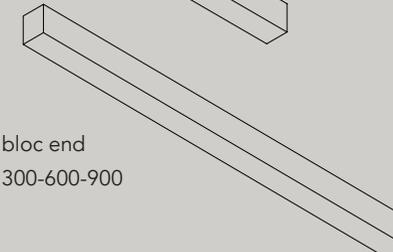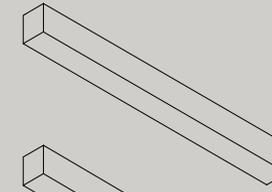


bloc end
300-600-900

Order Code

- 20600.AA00 bloc 300
- 20610.AA00 bloc 600
- 20620.AA00 bloc 900
- 20601.AA00 bloc 300 end
- 20611.AA00 bloc 600 end
- 20621.AA00 bloc 900 end
- 20602.AA00 bloc 300 end, incl. driver 100W
- 20612.AA00 bloc 600 end, incl. driver 100W
- 20622.AA00 bloc 900 end, incl. driver 100W

- custom material on request
- oak can be dyed in reference color

AA	Finish
01	black
02	white
21	black alu anodised
22	natural alu anodised
23	brass alu anodised
25	bronze alu anodised
26	dark bronze anodised
30	brass brushed
31	brass polished
40	walnut, natural waxed
41	oak natural, natural waxed
42	oak classic brown dye
43	oak intense black dye
61	carrara bianco extra, honed

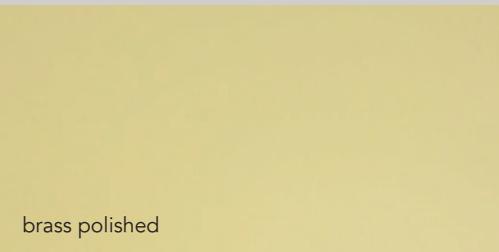

brass polished





brass brushed

scale 1/1 - Differences in colors and patterns may occur since these are natural materials.

°bloc.bevel

materials aluminium coated or anodised / PC
 weight 600gr / 1.32lb
 voltage 48 Vdc
 wattage 8,2 W
 ugr <19
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*
 *from Q3 2020

IP20   

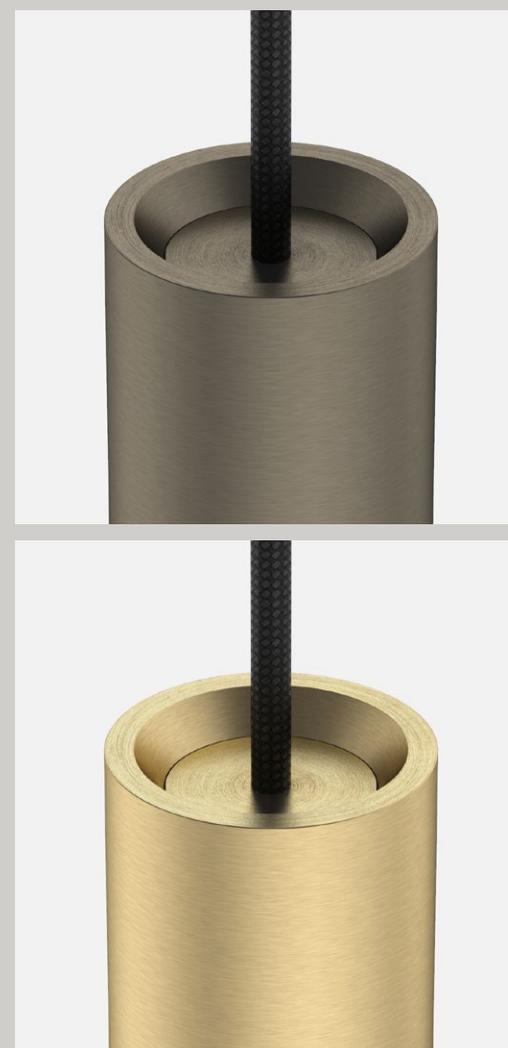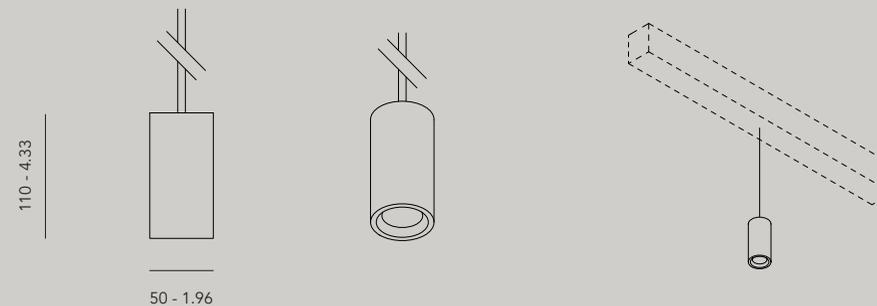

Order Code

20500.AA00.BBBB.CCC.DD bevel
 20501.AA00.BBBB.CCC.DD bevel monopoint

°bevel must always be accompanied with a °bloc (see page 141)

max. 1 °bevel on bloc.300
 max. 2 °bevel on bloc.600
 max. 3 °bevel on bloc.900

AA	Finish	
01	black	
02	white	
22	aluminum anodised brushed	
23	brass anodised brushed	
25	bronze anodised brushed	
26	dark bronze anodised brushed	
BBBB	Light	
9527	cri 95, 2700K	
9530	cri 95, 3000K	
CCC	Optic	Output*
300	30°	670lm - 1550cd
450	45°	700lm - 1070cd
600	60°	690lm - 811cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	

Accessories

10150.0100 recessed ceiling rose black, Ø50 mm
 10150.0200 recessed ceiling rose white, Ø50 mm



* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.