

A satellite night view of Italy, showing the illuminated urban areas and road networks against the dark background of the country and surrounding seas.

 **INLUX**
ITALIA

NEXOLUCE



CONTENTS

BRAND PHILOSOPHY	p.	9
INDEX PRODUCTS	p.	10
SYMBOLOLOGY	p.	274
CODES STRUCTURE	p.	275

CATEGORIES

RECESSED	p.	17
SURFACE	p.	135
PROJECTOR-HIGH BAY	p.	185
SIGNAGE	p.	225
STRIP	p.	233
TRACK	p.	253
ACCESSORIES	p.	265



© INLUX ITALIA is a brand of NEXO LUCE Srl, a company incorporated in Italy.

The logo and the name are the property of Nexo Luce Srl.

The present catalogue and its content in whole or in part are the property of Nexo Luce Srl. All rights reserved.

We reserve the right to change details and specifications without prior written notice.

© JUNE 2020 - RELEASE 04



INLUX ITALIA is a brand of Nexo Luce Srl that has been created with an objective to assist clients in meeting budget constraints, whilst still getting a quality guaranteed through our Italian factory.

INLUX ITALIA's products are manufactured outside Italy according to our specifications; rigorous controls occur both in the production factory and in our factory in Italy.

Warranty is given by Nexo Luce Srl, Italy.

Products manufactured under our brand INLUX ITALIA are mainly indoor technical lighting.

INLUX ITALIA è un marchio di Nexo Luce Srl che è stato creato con l'obiettivo di assistere il cliente nel soddisfare eventuali esigenze di budget ma ottenendo, al contempo, la qualità garantita dalla nostra azienda italiana.

Gli apparecchi INLUX ITALIA sono prodotti all'estero seguendo le nostre specifiche; controlli rigorosi vengono effettuati sia nella fabbrica d'origine che presso il nostro stabilimento in Italia.

La garanzia viene rilasciata da Nexo Luce Srl, Italia.

Gli apparecchi prodotti sotto il marchio INLUX ITALIA sono principalmente destinati all'illuminazione tecnica di interni.

RECESSED

							
Pupilla 5 p.18	Pupilla 5 IP p.20	Noce 5 p.22	Noce 9 p.24	Noce 15 p.26	Noce Q 5 p.28	Noce Q 9 p.30	Noce Q 15 p.32
							
Cornice 1 p.34	Cornice 2 p.36	Cornice 3 p.38	Occhio 5 p.40	Occhio 10 p.42	Occhio 15 p.44	Occhio 20 p.46	Occhio 24 p.48
							
Occhio 30 p.50	Occhio 5 ADJ p.52	Occhio 10 ADJ p.54	Occhio 15 ADJ p.56	Occhio 20 ADJ p.58	Occhio 24 ADJ p.60	Occhio 30 ADJ p.62	Retina 5 p.64
							
Retina 10 p.66	Retina 15 p.68	Retina 20 p.70	Retina 24 p.72	Retina 30 p.74	Oblò 6 p.76	Oblò 12 p.78	Oblò 18 p.80
							
Oblò 24 p.82	Oblò 30 p.84	Quablò 6 p.86	Quablò 12 p.88	Quablò 18 p.90	Quablò 24 p.92	Quablò 30 p.94	Plafò 30 p.96
							
Plafò 40 p.98	Plafò 50 p.100	Plafò 70 p.102	Regolo S 18 p.104	Regolo S 24 p.106	Regolo S 30 p.108	Regolo M 36 p.110	Regolo M 40 p.112
							
Regolo M 50 p.114	Regolo M 72 p.116	Regolo L 60 p.118	Regolo L 72 p.120	Regolo L 84 p.122	Piano p.124	Bandiera Q p.126	Segno p.128
							
Segno Q p.130	Segno M p.132						

SURFACE



Specchio
p.136



Specchio S
p.138



Specchio 4
p.140



Doppio fascio
p.142



Fascio verticale
p.144



Blocchetto
p.146



Blocchetto IP65
p.148



Blocchetto S
IP65 p.150



Tronchetto Led
p.152



Tronchetto Q
Led p.154



Cippo 17 Led
p.156



Cippo 29 Led
p.158



Cofanetto Q
Led p.160



Cofanetto T
Led p.162



Sole
p.164



Sole 2
p.166



Tartaruga T
p.168



Tartaruga
p.170



Tartaruga 2
p.172



Tartaruga 3
p.174



Stagna 18 Led
p.176



Stagna 28 Led
p.178



Stagna 36 Led
p.180




Stagna 50 Led
p.182

PROJECTOR-HIGH BAY



Drillo 50 N
p.186



Drillo 100 N
p.188



Drillo 150 N
p.190



Campo 240
p.192



Campo 320
p.194



Campo 480
p.196



Campo 720
p.198



Campo 960
p.200



Campo 1200
p.202



Campo 1440
p.204



Mira 100
p.206



Mira 150
p.208



Mira 200
p.210



Rimessa 60
p.212



Rimessa 90
p.214



Rimessa 120
p.216



Rimessa 150
p.218



Rimessa 180
p.220



Guardia
p.222

SIGNAGE



Fuga Led
p.226



Uscita 4
p.228



Emergenza
IP65 p.230

STRIP



Strip Inlux Led
LB p.234



Strip Inlux Led
HB p.236



Riga LB
p.238



Riga HB
p.240



Riga Incasso LB
p.242




Riga Incasso HB
p.244



Gomma H
p.246



Gomma V
p.248



Riga Scala
p.250

TRACK



Freccia S
p.254




Freccia M
p.256



Freccia L
p.258



Binario 2
p.260



Binario 2 R
p.262


ACCESSORIES




Gomma H
p.266



Gomma V
p.268



Binario 2
p.270



Binario 2 R
p.272





RECESSED



PUPILLA 5

CEILING RECESSED

IP54

LED

5W

cod. 5234 /// PUPILLA 5

- Circular recessed downlight with two different IP protection degree: IP54 on the frontal/ external surface and IP20 inside
- Metal body
- Clear glass cover
- Springs for installation
- GU10 lamp holder






This luminaire is compatible with bulbs of the energy classes:

The luminaire is sold with a bulb of the energy class:


A+

NEXOLUCE 874/2012

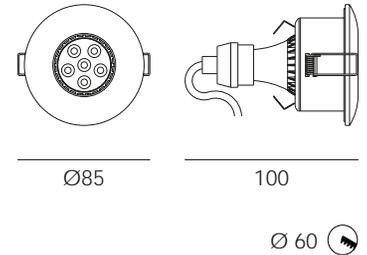

IP54Front **IP20**Back

Lamp	Input	Power
GU10 LED	220/240Vac 50/60Hz	5 W

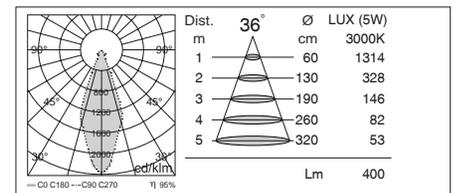

LAMP INCLUDED

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5234	WITHOUT EM. KIT	0 IP54/IP20	1 GU10	.05 5 W	AX CLEAR DIFFUSER	1 ON / OFF	.A WHITE
				A05 5 W (450 lm)			.B GREY
							.D BLACK
							.F POLISH GOLD
							.J POLISH CHROME

CODE EXAMPLE:

Recessed downlight with GU10 lamp, IP54/20, 5W, clear diffuser, ON/OFF control, frame white color without emergency kit

5234.01.05AX1.A



PUPILLA 5 IP

CEILING RECESSED

IP54

LED

5W

cod. 5235 /// PUPILLA 5 IP

- Circular recessed downlight with two different IP protection degree: IP54 on the frontal/ external surface and IP20 inside
- Metal body
- Frosted glass cover
- Springs for installation
- GU10 lamp holder






This luminaire is compatible with bulbs of the energy classes:

The luminaire is sold with a bulb of the energy class:


A

NEXOLUCE 874/2012



IP54Front **IP20**Back

Lamp	Input	Power
GU10 LED	220/240Vac 50/60Hz	5 W

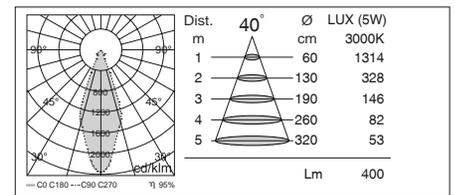

LAMP INCLUDED

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5235	. WITHOUT EM. KIT	0 IP54/IP20	1 GU10	.05 5 W	.H 40°	1 ON / OFF	.A WHITE
							.B GREY
							.D BLACK
							.F POLISH GOLD
							.J POLISH CHROME

CODE EXAMPLE:

Recessed downlight with with GU10 lamp, IP54/20, 5W, 40° optic, ON/OFF control, frame white color without emergency kit

5235.01.05.H1.A



NOCE 5

CEILING RECESSED




IP40

LED

5W

cod. 5326 /// NOCE 5

- Recessed trimless circular downlight
- Metal body
- Transparent glass diffuser
- Power supply included

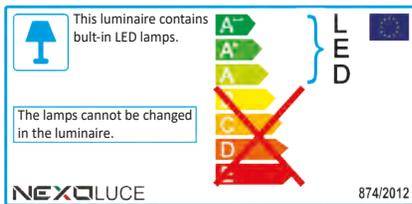

Ø 62



IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	5 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5326	. WITHOUT EM. KIT	2 IP40	A 2700 K	.05 5W	BC 15°	1 ON / OFF	.A WHITE
			B 3000 K		BE 24°	8 DIMM. 1-10V	.B GREY
			C 4000 K		BD 38°		.D BLACK
					BA 60°		

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP40, 5W, 60° optic, ON/OFF control, frame white color without emergency kit

5326.2B.05BA1.A



NOCE 9

CEILING RECESSED




IP40

LED

9W

cod. 5308 /// NOCE 9

- Recessed trimless circular downlight
- Metal body
- Transparent glass diffuser
- Power supply included

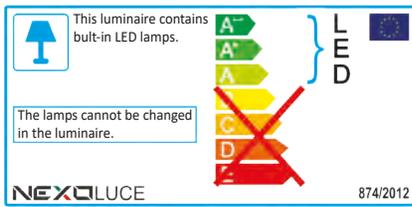

Ø 85



IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	9W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5308	. WITHOUT EM. KIT	2 IP40	A 2700 K	.09 9W	BC 15°	1 ON / OFF	.A WHITE
			B 3000 K		BE 24°		8 DIMM. 1-10V
			C 4000 K		BD 38°	.D BLACK	
			BA 60°				

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP40, 9W, 60° optic, ON/OFF control, frame white color without emergency kit

5308.2B.09BA1.A



NOCE 15

CEILING RECESSED




IP40

LED

15W

cod. 5327 /// NOCE 15

- Recessed trimless circular downlight
- Metal body
- Transparent glass diffuser
- Power supply included

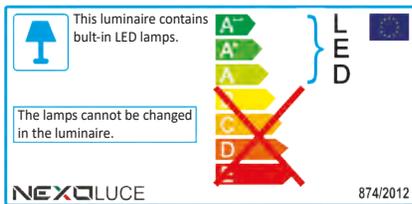

Ø 85



IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	15W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5327	. WITHOUT EM. KIT	2 IP40	A 2700 K	.15 15W	BC 15°	1 ON / OFF	.A WHITE
			B 3000 K		BE 24°	8 DIMM. 1-10V	.B GREY
			C 4000 K		BD 38°		.D BLACK
					BA 60°		

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP40, 15W, 60° optic, ON/OFF control, frame white color without emergency kit

5327.2B.15BA1.A



NOCE Q 5

CEILING RECESSED





IP40

LED

5W

cod. 5329 /// NOCE Q 5

- Recessed trimless square downlight
- Metal body
- Transparent glass diffuser
- Power supply included

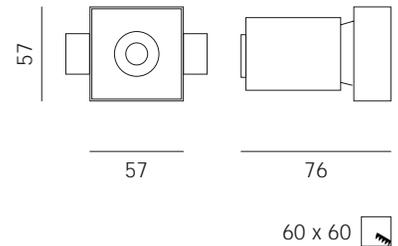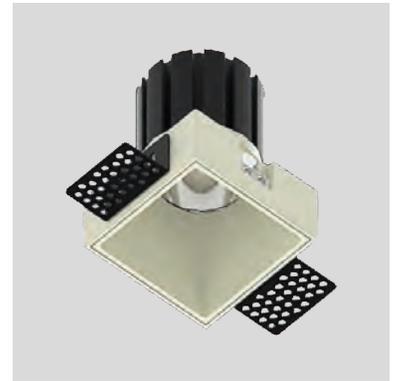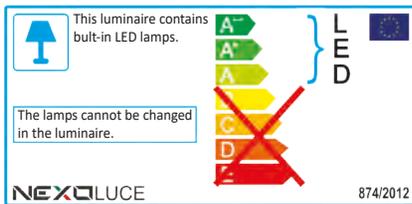

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	5 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5329	WITHOUT EM. KIT	2 IP40	A 2700 K	.05 5W	BC 15°	1 ON / OFF	.A WHITE
			B 3000 K		BE 24°	8 DIMM. 1-10V	.B GREY
			C 4000 K		BD 38°		.D BLACK
					BA 60°		

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP40, 5W, 15° optic, ON/OFF control, frame white color without emergency kit

5329.2B.05BC1.A



NOCE Q 9

CEILING RECESSED





IP40

LED

9W

cod. 5330 /// NOCE Q 9

- Recessed trimless square downlight
- Metal body
- Transparent glass diffuser
- Power supply included

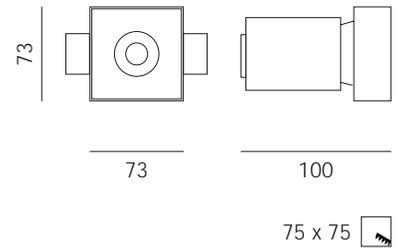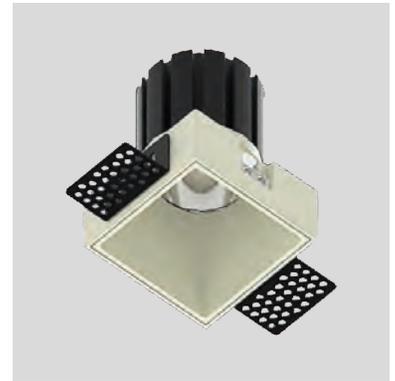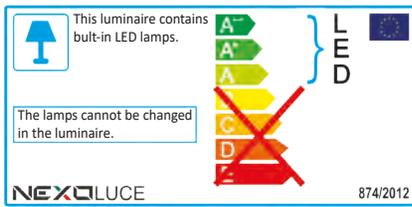

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	9 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5330	WITHOUT EM. KIT	2 IP40	A 2700 K	.09 9W	BC 15°	1 ON / OFF	.A WHITE
			B 3000 K		BE 24°	8 DIMM. 1-10V	.B GREY
			C 4000 K		BD 38°		.D BLACK
					BA 60°		

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP40, 9W, 15° optic, ON/OFF control, frame white color without emergency kit

5330.2B.09BC1.A



NOCE Q 15

CEILING RECESSED





IP40

LED

15W

cod. 5331 /// NOCE Q 15

- Recessed trimless square downlight
- Metal body
- Transparent glass diffuser
- Power supply included

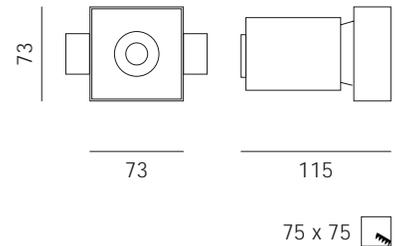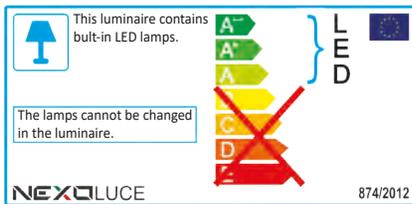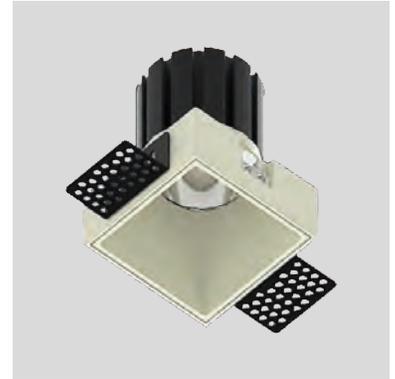

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	15 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5331	. WITHOUT EM. KIT	2 IP40	A 2700 K	.15 15 W	BC 15°	1 ON / OFF	.A WHITE
			B 3000 K		BE 24°	8 DIMM. 1-10V	.B GREY
			C 4000 K		BD 38°		.D BLACK
					BA 60°		

CODE EXAMPLE:


Recessed downlight with warm white light color at 3000K, IP40, 15W, 15° optic, ON/OFF control, frame white color without emergency kit

5331.2B.15BC1.A



CORNICE 1

CEILING RECESSED



IP20




LED

5W

10W

cod. 5233 /// CORNICE 1

- Recessed downlight
- Adjustable beam
- Springs for installation
- Power supply included

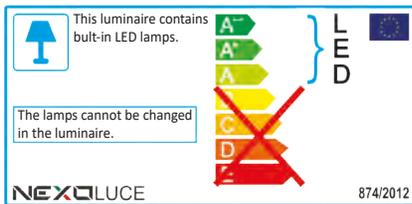

IP20

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	5 / 10 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5233	. WITHOUT EM. KIT	1 IP20	B 3000 K	.05 5 W	BD 38°	1 ON / OFF	.A WHITE
			C 4000 K	.10 10 W			

CODE EXAMPLE:


Recessed downlight with warm white light color at 3000K, IP20, 5W, 38° optic, ON/OFF control, frame white color without emergency kit

5233.1B.05BD1.A



CORNICE 2

CEILING RECESSED



IP20




LED

10W

20W

cod. 5218 /// CORNICE 2

- Recessed downlight
- Adjustable beam
- Springs for installation
- Power supply included

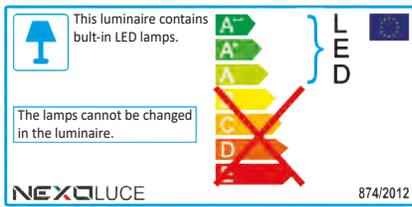

IP20

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	10 / 20 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5218	. WITHOUT EM. KIT	1 IP20	B 3000 K	.10 2 x 5 W	BD 38°	1 ON / OFF	.A WHITE
			C 4000 K	.20 2 x 10 W			

CODE EXAMPLE:


Recessed downlight with warm white light color at 3000K, IP20, 2x5W, 38° optic, ON/OFF control, frame white color without emergency kit

5218.1B.10BD1.A



CORNICE 3

CEILING RECESSED



IP20




LED

15W

30W

cod. 5219 /// CORNICE 3

- Recessed downlight
- Adjustable beam
- Springs for installation
- Power supply included

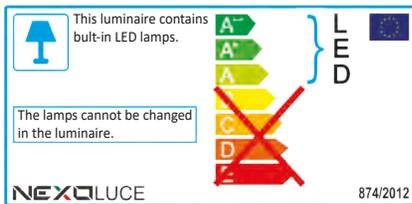

285 x 110



IP20

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	15 / 30 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5219	. WITHOUT EM. KIT	1 IP20	B 3000 K	.15 3 x 5 W	BD 38°	1 ON / OFF	.A WHITE
			C 4000 K	.30 3 x 10 W			

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP20, 3x5W, 38° optic, ON/OFF control, frame white color without emergency kit

5219.1B.15BD1.A



OCCHIO 5

CEILING RECESSED




IP44

LED

5W

cod. 5310 /// OCCHIO 5


- Circular recessed downlight with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Metal body
- Polyester powder coated
- Clear polycarbonate diffuser
- Aluminium mirror reflector
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

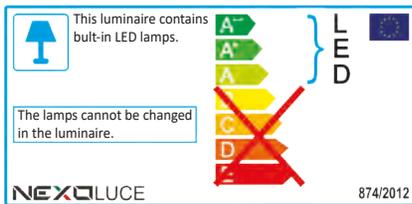

Ø 75


ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1.6Ah - IP20
code: 015.0013.0

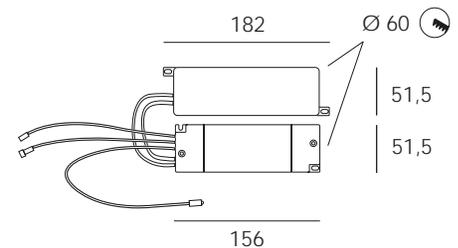

IP44Front **IP20**Back

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	5 W

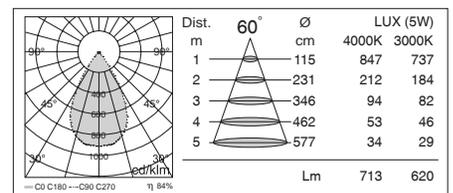

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5310	WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.05 5 W	BA 60°	1 ON / OFF	.A WHITE
			C 4000 K			7 DIM. DALI	

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP44/IP20, 5W, 60° optic, ON/OFF control, frame white color without emergency kit

5310.9B.05BA1.A



OCCHIO 10

CEILING RECESSED




IP44

LED

10W

cod. 5312 /// OCCHIO 10


- Circular recessed downlight with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Metal body
- Polyester powder coated
- Clear polycarbonate diffuser
- Aluminium mirror reflector
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

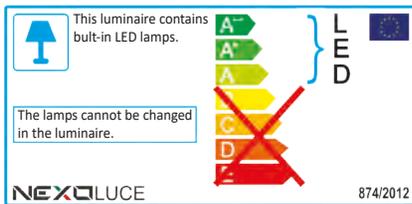

Ø 100


ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1.6Ah - IP20
code: 015.0013.0

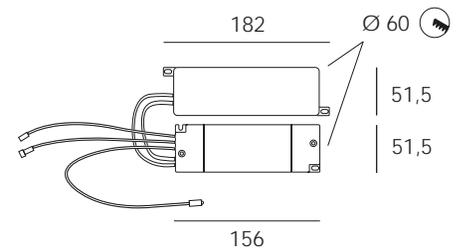

IP44Front **IP20**Back

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	10 W

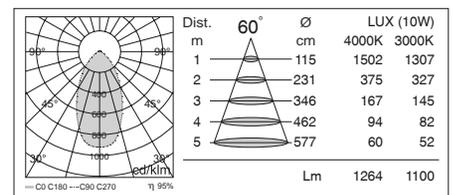

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5312	WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.10 10 W	.H 40°	1 ON / OFF	.A WHITE
			C 4000 K		BA 60°	7 DIM. DALI	

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP44/IP20, 10W, 60° optic, ON/OFF control, frame white color without emergency kit **5312.9B.10BA1.A**



OCCHIO 15

CEILING RECESSED




IP44

LED

15W

cod. 5314 /// OCCHIO 15


- Circular recessed downlight with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Metal body
- Polyester powder coated
- Clear polycarbonate diffuser
- Aluminium mirror reflector
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

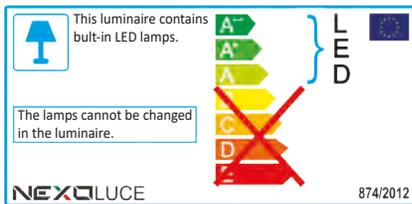

Ø 120


ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1.6Ah - IP20
code: 015.0013.0

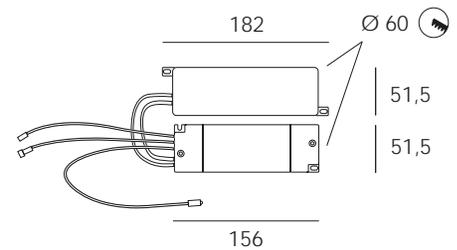

IP44Front **IP20**Back

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	15 W

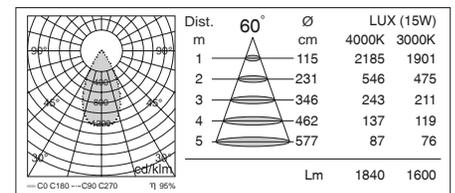

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5314	WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.15 15 W	BA 60°	1 ON / OFF	.A WHITE
			C 4000 K		AR 90°	7 DIM. DALI	

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP44/IP20, 15W, 60° optic, ON/OFF control, frame white color without emergency kit **5314.9B.15BA1.A**



OCCHIO 20

CEILING RECESSED




IP44

LED

20W

cod. 5315 /// OCCHIO 20


- Circular recessed downlight with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Metal body
- Polyester powder coated
- Clear polycarbonate diffuser
- Aluminium mirror reflector
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

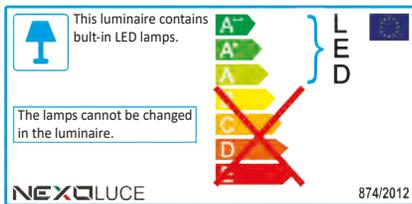

Ø 120


ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1.6Ah - IP20
code: 015.0013.0

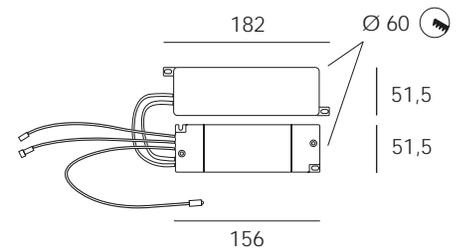

IP44Front **IP20**Back

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	20 W

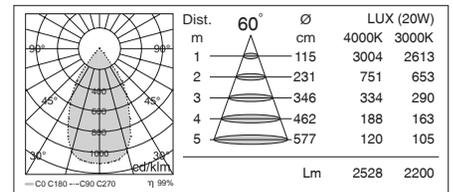

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5315	WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.20 20 W	BA 60°	1 ON / OFF	.A WHITE
			C 4000 K		AR 90°	7 DIM. DALI	

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP44/IP20, 20W, 60° optic, ON/OFF control, frame white color without emergency kit **5315.9B.20BA1.A**



OCCHIO 24

CEILING RECESSED




IP44

LED

24W

cod. 5195 /// OCCHIO 24


- Circular recessed downlight with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Metal body
- Polyester powder coated
- Clear polycarbonate diffuser
- Aluminium mirror reflector
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

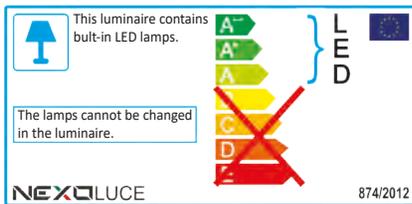


Ø 170

ACCESSORIES


3 HOURS EMERGENCY KIT
7,2V/1.6Ah - IP20
code: 015.0013.0

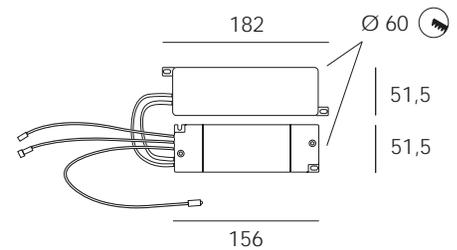

IP44Front **IP20**Back



Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	24 W

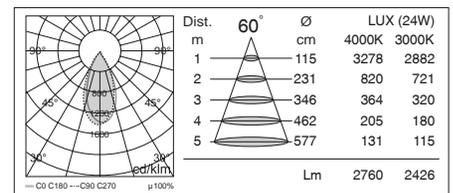

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5195	WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.24 24 W	BA 60°	1 ON / OFF	.A WHITE
			C 4000 K		AR 90°	7 DIM. DALI	

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP44/IP20, 24W, 60° optic, ON/OFF control, frame white color without emergency kit **5195.9B.24BA1.A**



OCCHIO 30

CEILING RECESSED



IP44

LED



30W

cod. 5196 /// OCCHIO 30

- Circular recessed downlight with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Metal body
- Polyester powder coated
- Clear polycarbonate diffuser
- Aluminium mirror reflector
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

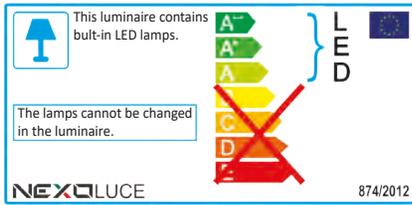

3 HOURS EMERGENCY KIT
7,2V/1.6Ah - IP20
code: 015.0013.0

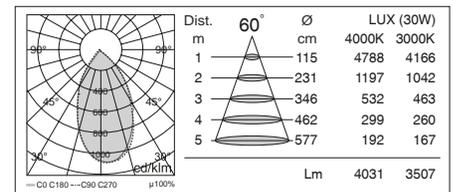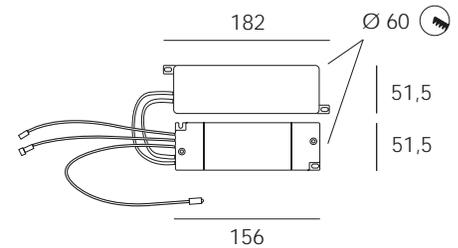

IP44Front **IP20**Back

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	30 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5196	WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.30 30 W	BA 60°	1 ON / OFF	.A WHITE
			C 4000 K		AR 90°	7 DIM. DALI	


CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP44/IP20, 30W, 60° optic, ON/OFF control, frame white color without emergency kit **5196.9B.30BA1.A**



OCCHIO 5 ADJ

CEILING RECESSED






IP40

LED


5W

cod. 5400 /// OCCHIO 5 ADJ

- Circular recessed downlight with adjustable beam
- Metal body
- Polyester powder coated
- Aluminium mirror reflector
- System efficacy up to 100lm/W
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

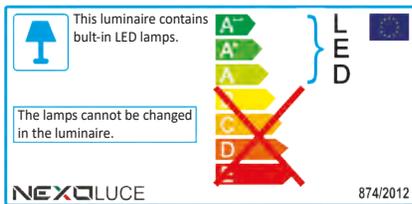

ACCESSORIES

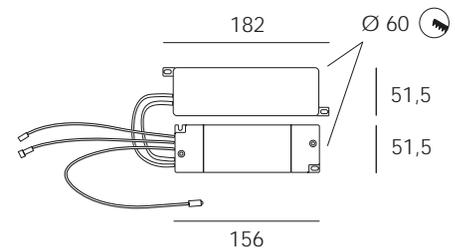

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	5 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5400	. WITHOUT EM. KIT	2 IP40	B 3000 K	.05 05 W	BC 15°	1 ON / OFF	.A WHITE
			C 4000 K		BE 24°	7 DIM. DALI	
					.H 40°		
					BA 60°		


CODE EXAMPLE:

Recessed adjustable downlight with warm white light color at 3000K, IP40, 5W, 24° optic, ON/OFF control, frame white color without emergency kit **5400.2B.05BE1.A**



OCCHIO 10 ADJ

CEILING RECESSED






IP40

LED

10W


cod. 5402 /// OCCHIO 10 ADJ

- Circular recessed downlight with adjustable beam
- Metal body
- Polyester powder coated
- Aluminium mirror reflector
- System efficacy up to 100lm/W
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

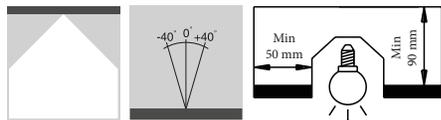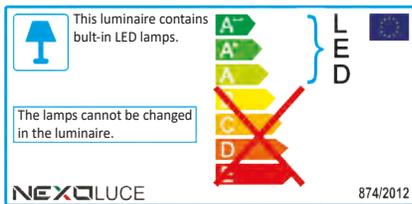


ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0

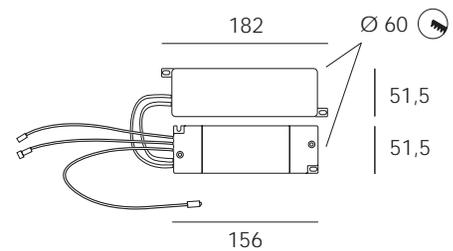

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	10 W

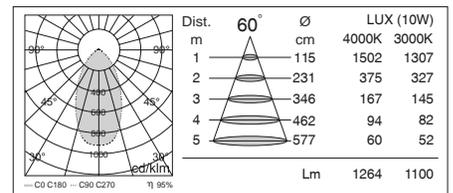

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5402	WITHOUT EM. KIT	2 IP40	B 3000 K	.10 10 W	BC 15°	1 ON / OFF	.A WHITE
			C 4000 K		BE 24°	7 DIM. DALI	
					.H 40°		
					BA 60°		


CODE EXAMPLE:

Recessed adjustable downlight with warm white light color at 3000K, IP40, 10W, 24° optic, ON/OFF control, frame white color without emergency kit **5402.2B.10BE1.A**



OCCHIO 15 ADJ

CEILING RECESSED






IP40

LED

15W

cod. 5404 /// OCCHIO 15 ADJ


- Circular recessed downlight with adjustable beam
- Metal body
- Polyester powder coated
- Aluminium mirror reflector
- System efficacy up to 100lm/W
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

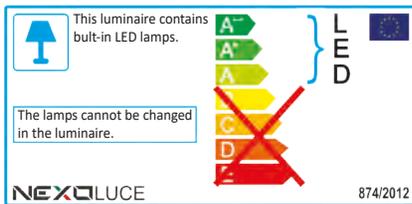

Ø 125



ACCESSORIES

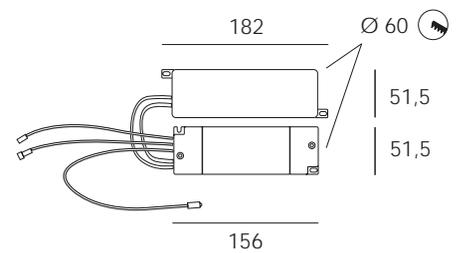

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	15 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5404	WITHOUT EM. KIT	2 IP40	B 3000 K	.15 15 W	BC 15°	1 ON / OFF	.A WHITE
			C 4000 K		BE 24°	7 DIM. DALI	
					.H 40°		
					BA 60°		


CODE EXAMPLE:

Recessed adjustable downlight with warm white light color at 3000K, IP40, 15W, 24° optic, ON/OFF control, frame white color without emergency kit **5404.2B.15BE1.A**



OCCHIO 20 ADJ

CEILING RECESSED






IP40

LED

20W

cod. 5406 /// OCCHIO 20 ADJ


- Circular recessed downlight with adjustable beam
- Metal body
- Polyester powder coated
- Aluminium mirror reflector
- System efficacy up to 100lm/W
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

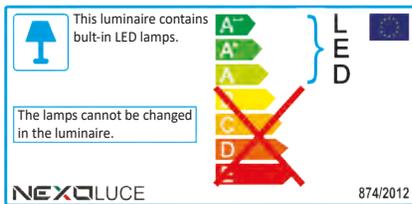

Ø 125



ACCESSORIES

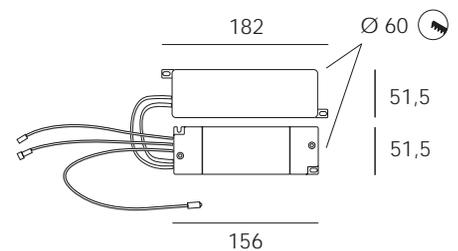

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	20 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5406	WITHOUT EM. KIT	2 IP40	B 3000 K	.20 20 W	BC 15°	1 ON / OFF	.A WHITE
			C 4000 K		BE 24°	7 DIM. DALI	
					.H 40°		
					BA 60°		


CODE EXAMPLE:

Recessed adjustable downlight with warm white light color at 3000K, IP40, 20W, 24° optic, ON/OFF control, frame white color without emergency kit **5406.2B.20BE1.A**



OCCHIO 24 ADJ

CEILING RECESSED






IP40

LED

24W

cod. 5407 /// OCCHIO 24 ADJ


- Circular recessed downlight with adjustable beam
- Metal body
- Polyester powder coated
- Aluminium mirror reflector
- System efficacy up to 100lm/W
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

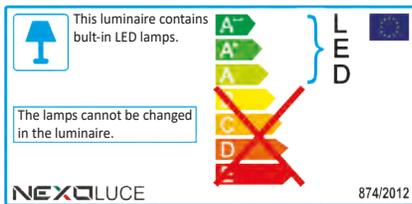

Ø 145



ACCESSORIES

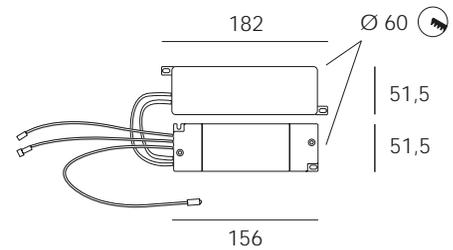

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	24 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5407	WITHOUT EM. KIT	2 IP40	B 3000 K	.24 24 W	BC 15°	1 ON / OFF	.A WHITE
			C 4000 K		BE 24°	7 DIM. DALI	
					.H 40°		
					BA 60°		


CODE EXAMPLE:

Recessed adjustable downlight with warm white light color at 3000K, IP40, 24W, 24° optic, ON/OFF control, frame white color without emergency kit **5407.2B.24BE1.A**



OCCHIO 30 ADJ

CEILING RECESSED






IP40

LED


30W

cod. 5408 /// OCCHIO 30 ADJ

- Circular recessed downlight with adjustable beam
- Metal body
- Polyester powder coated
- Aluminium mirror reflector
- System efficacy up to 100lm/W
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

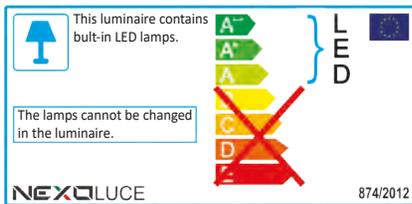

ACCESSORIES

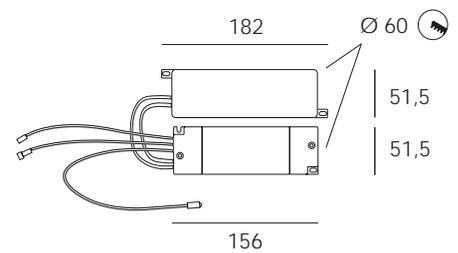

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	30 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5408	WITHOUT EM. KIT	2 IP40	B 3000 K	.30 30 W	BC 15°	1 ON / OFF	.A WHITE
			C 4000 K		BE 24°	7 DIM. DALI	
					.H 40°		
					BA 60°		

CODE EXAMPLE:

Recessed adjustable downlight with warm white light color at 3000K, IP40, 30W, 24° optic, ON/OFF control, frame white color without emergency kit **5408.2B.30BE1.A**



RETINA 5

CEILING RECESSED




IP65

LED


5W

cod. 5197 /// RETINA 5

- Circular recessed downlight
- Metal body
- Opal polycarbonate diffuser
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 1)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

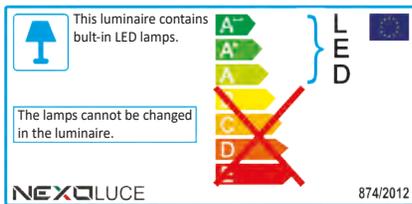

ACCESSORIES

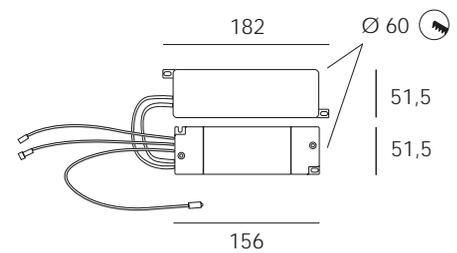

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	5 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5197	. WITHOUT EM. KIT	5 IP65	B 3000 K	.05 5 W	AR 90°	1 ON / OFF	.A WHITE
			C 4000 K		.Z 120°		

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP65, 5W, 90° optic, ON/OFF control, frame white color without emergency kit

5197.5B.05AR1.A



RETINA 10

CEILING RECESSED




IP65

LED


10W

cod. 5199 /// RETINA 10

- Circular recessed downlight
- Metal body
- Opal polycarbonate diffuser
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 1)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

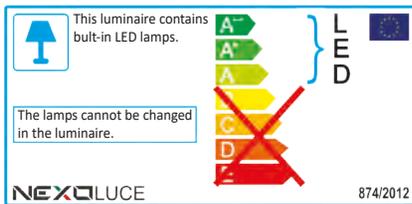

ACCESSORIES

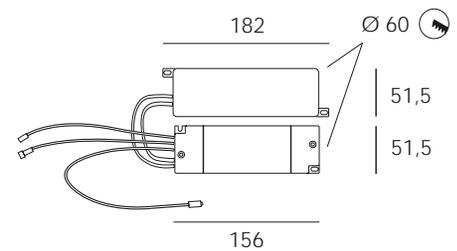


3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0



IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	10 W

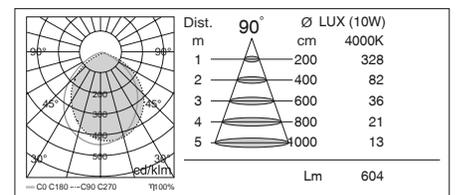

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5199	. WITHOUT EM. KIT	5 IP65	B 3000 K	.10 10 W	AR 90°	1 ON / OFF	.A WHITE
			C 4000 K		.Z 120°		

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP65, 10W, 90° optic, ON/OFF control, frame white color without emergency kit

5199.5B.10AR1.A



RETINA 15

CEILING RECESSED




IP65

LED


15W

cod. 5201 /// RETINA 15

- Circular recessed downlight
- Metal body
- Opal polycarbonate diffuser
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 1)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

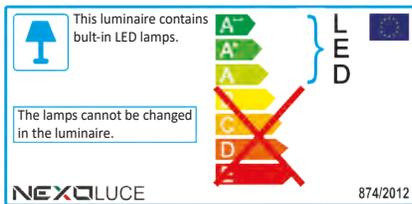

ACCESSORIES

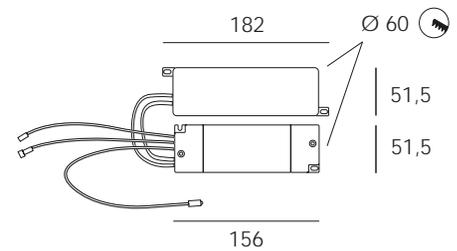

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	15 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5201	. WITHOUT EM. KIT	5 IP65	B 3000 K	.15 15 W	AR 90°	1 ON / OFF	.A WHITE
			C 4000 K		.Z 120°		

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP65, 15W, 90° optic, ON/OFF control, frame white color without emergency kit

5201.5B.15AR1.A



RETINA 20

CEILING RECESSED




IP65

LED

20W


cod. 5203 /// RETINA 20

- Circular recessed downlight
- Metal body
- Opal polycarbonate diffuser
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 1)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

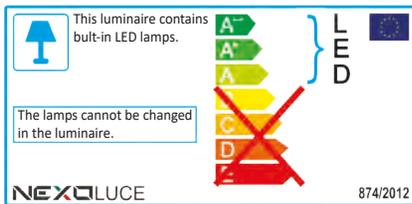


ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1.6Ah - IP20
code: 015.0013.0

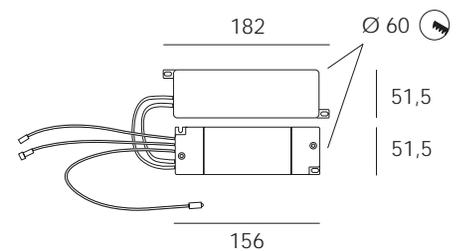

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	20 W

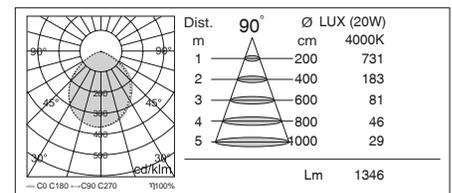

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5203	. WITHOUT EM. KIT	5 IP65	B 3000 K	.20 20 W	AR 90°	1 ON / OFF	.A WHITE
			C 4000 K		.Z 120°		

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP65, 20W, 90° optic, ON/OFF control, frame white color without emergency kit

5203.5B.20AR1.A



RETINA 24

CEILING RECESSED




IP65

LED

24W

cod. 5204 /// RETINA 24

- Circular recessed downlight
- Metal body
- Opal polycarbonate diffuser
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 1)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

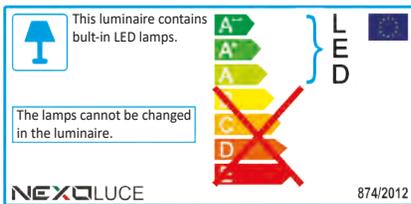

Ø190


70

Ø 165




ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0

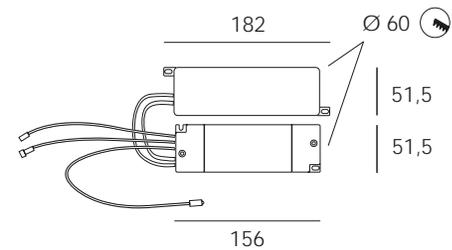

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	24 W

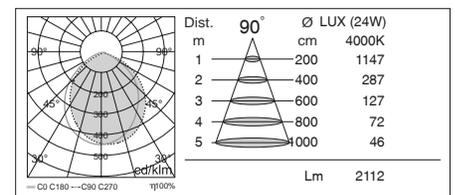

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5204	. WITHOUT EM. KIT	5 IP65	B 3000 K	.24 24 W	AR 90°	1 ON / OFF	.A WHITE
			C 4000 K		.Z 120°		

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP65, 24W, 90° optic, ON/OFF control, frame white color without emergency kit

5204.5B.24AR1.A



RETINA 30

CEILING RECESSED




IP65

LED


30W

cod. 5205 /// RETINA 30

- Circular recessed downlight
- Metal body
- Opal polycarbonate diffuser
- Springs for installation
- Available with 3 hours emergency kit
- Power supply included (Class 1)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

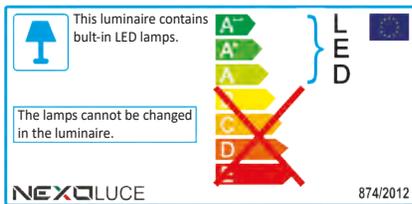

ACCESSORIES

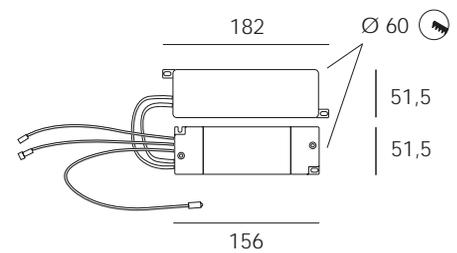

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	30 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5205	. WITHOUT EM. KIT	5 IP65	B 3000 K	.30 30 W	AR 90°	1 ON / OFF	.A WHITE
			C 4000 K		.Z 120°		

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP65, 30W, 90° optic, ON/OFF control, frame white color without emergency kit

5205.5B.30AR1.A



OBLÓ 6

CEILING RECESSED




IP44

LED

6W

cod. 5163 /// OBLÓ 6


- Recessed round LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Aluminium body
- Opal plastic diffuser
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

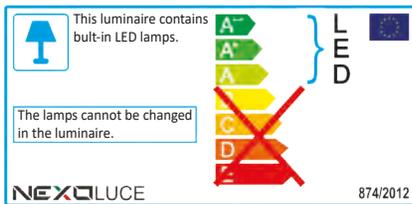

Ø 105


ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0

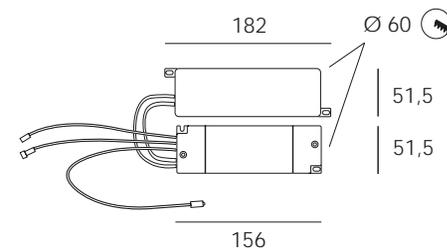

IP44Front **IP20**Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	6 W

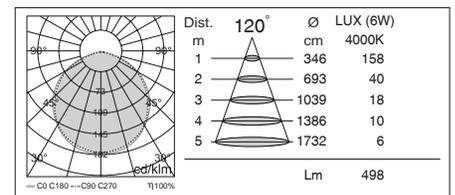

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5163	WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.06 6 W	.Z 120°	1 ON / OFF	.A WHITE
			C 4000 K				AE SILVER

CODE EXAMPLE:

Recessed round panel with warm white light color at 3000K, IP44/IP20, 6W, ON/OFF control, frame white color without emergency kit

5163.9B.06.Z1.A



OBLÓ 12

CEILING RECESSED




IP44

LED

12W

cod. 5165 /// OBLÓ 12


- Recessed round LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Aluminium body
- Opal plastic diffuser
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

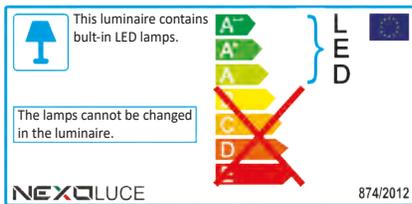

Ø 160


ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0

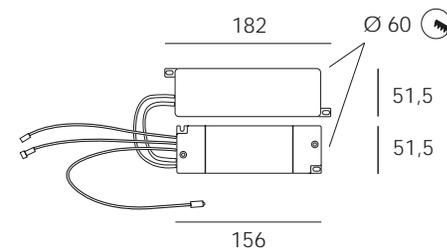

IP44Front **IP20**Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	12 W

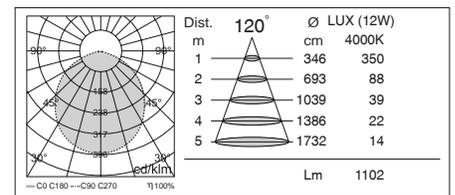

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5165	. WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.12 12 W	.Z 120°	1 ON / OFF	.A WHITE
			C 4000 K				AE SILVER

CODE EXAMPLE:

Recessed round panel with warm white light color at 3000K, IP44/IP20, 12W, ON/OFF control, frame white color without emergency kit

5165.9B.12.Z1.A



OBLÓ 18

CEILING RECESSED




IP44

LED

18W

cod. 5095 /// OBLÓ 18


- Recessed round LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Aluminium body
- Opal plastic diffuser
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

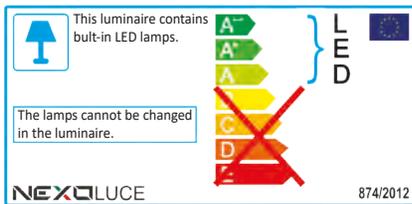

Ø 210


ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0

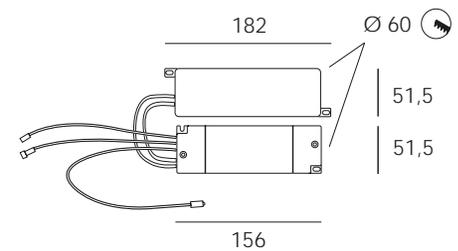

IP44Front **IP20**Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	18 W

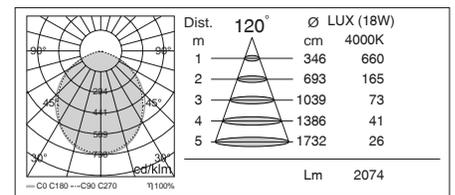

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5095	WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.18 18 W	.Z 120°	1 ON / OFF	.A WHITE
			C 4000 K				AE SILVER

CODE EXAMPLE:

Recessed round panel with warm white light color at 3000K, IP44/IP20, 18W, ON/OFF control, frame white color without emergency kit

5095.9B.18.Z1.A



OBLÓ 24

CEILING RECESSED




IP44

LED

24W

cod. 5096 /// OBLÓ 24


- Recessed round LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Aluminium body
- Opal plastic diffuser
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

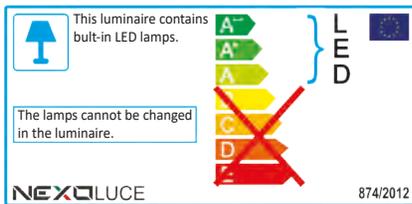

Ø 280


ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0

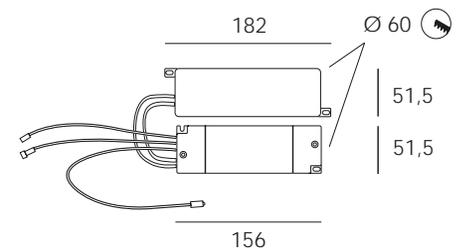

IP44Front **IP20**Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	24 W

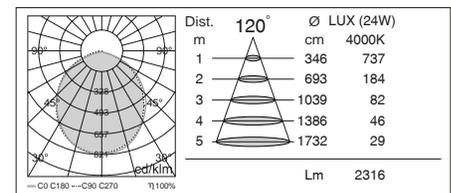

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5096	. WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.24 24 W	.Z 120°	1 ON / OFF	.A WHITE
			C 4000 K				AE SILVER

CODE EXAMPLE:

Recessed round panel with warm white light color at 3000K, IP44/IP20, 24W, ON/OFF control, frame white color without emergency kit

5096.9B.24.Z1.A



OBLÓ 30

CEILING RECESSED




IP44

LED

30W

cod. 5168 /// OBLÓ 30


- Recessed round LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Aluminium body
- Opal plastic diffuser
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

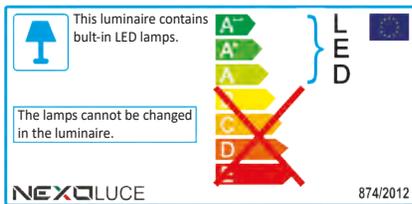

Ø 280


ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0

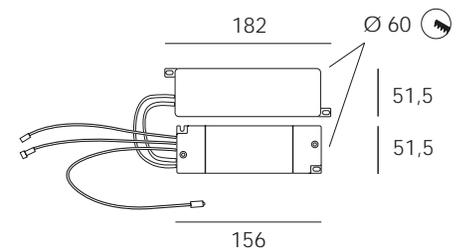

IP44Front **IP20**Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	30 W

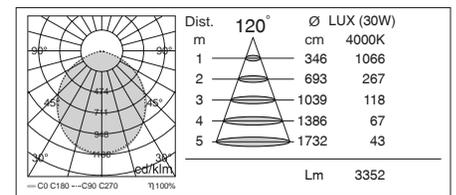

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5168	. WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.30 30 W	.Z 120°	1 ON / OFF	.A WHITE
			C 4000 K				AE SILVER

CODE EXAMPLE:

Recessed round panel with warm white light color at 3000K, IP44/IP20, 30W, ON/OFF control, frame white color without emergency kit

5168.9B.30.Z1.A



QUABLÓ 6

CEILING RECESSED




IP44

LED

6W

cod. 5169 /// QUABLÓ 6

- Recessed square LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Aluminium body
- Opal plastic diffuser
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

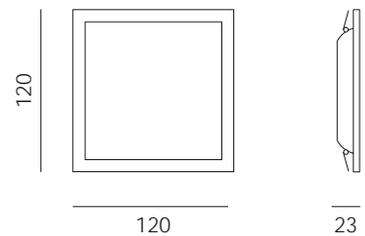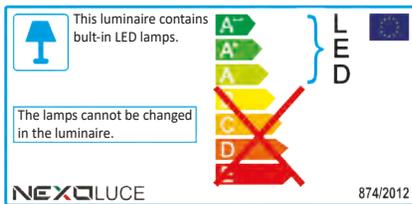


105 x 105

ACCESSORIES




3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0

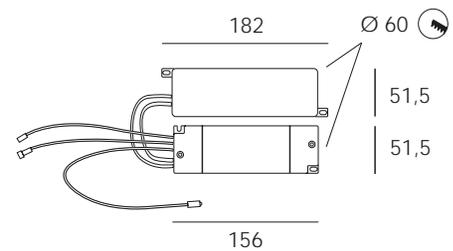

IP44Front **IP20**Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	6 W

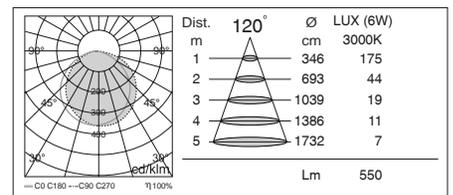

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5169	WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.06 6 W	.Z 120°	1 ON / OFF	.A WHITE
			C 4000 K				

CODE EXAMPLE:

Recessed square panel with warm white light color at 3000K, IP44/IP20, 6W, ON/OFF control, frame white color without emergency kit

5169.9B.06.Z1.A



QUABLÓ 12

CEILING RECESSED




IP44

LED

12W

cod. 5171 /// QUABLÓ 12


- Recessed square LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Aluminium body
- Opal plastic diffuser
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

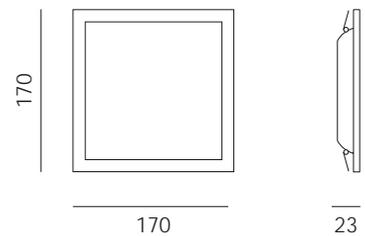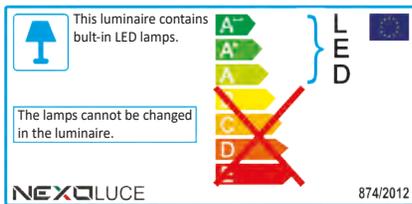

160 x 160


ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0

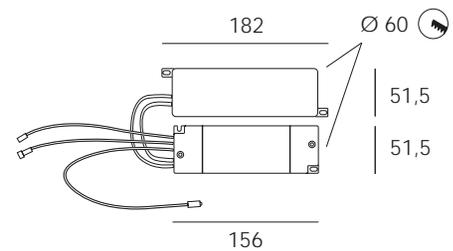

IP44Front **IP20**Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	12 W

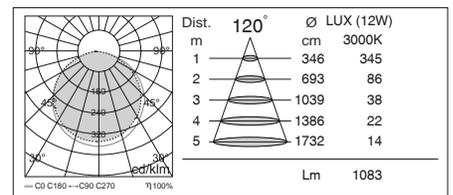

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5171	WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.12 12 W	.Z 120°	1 ON / OFF	.A WHITE
			C 4000 K				

CODE EXAMPLE:

Recessed square panel with warm white light color at 3000K, IP44/IP20, 12W, ON/OFF control, frame white color without emergency kit

5171.9B.12.Z1.A



QUABLÓ 18

CEILING RECESSED




IP44

LED

18W

cod. 5173 /// QUABLÓ 18

- Recessed square LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Aluminium body
- Opal plastic diffuser
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

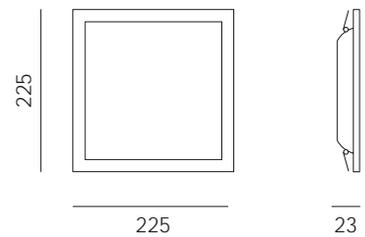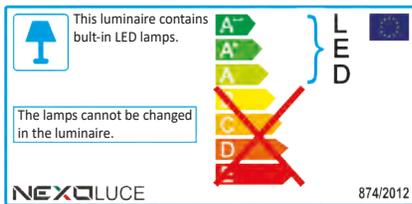


210 x 210

ACCESSORIES




3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0

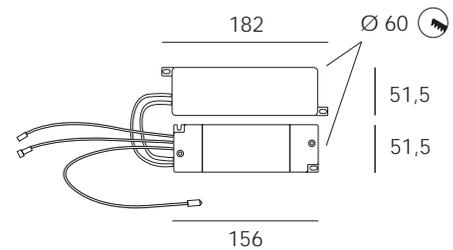

IP44Front **IP20**Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	18 W

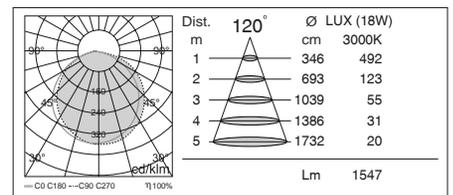

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5173	WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.18 18 W	.Z 120°	1 ON / OFF	.A WHITE
			C 4000 K				

CODE EXAMPLE:

Recessed square panel with warm white light color at 3000K, IP44/IP20, 18W, ON/OFF control, frame white color without emergency kit

5173.9B.18.Z1.A



QUABLÓ 24


CEILING RECESSED

IP44




LED

24W

cod. 5175 /// QUABLÓ 24

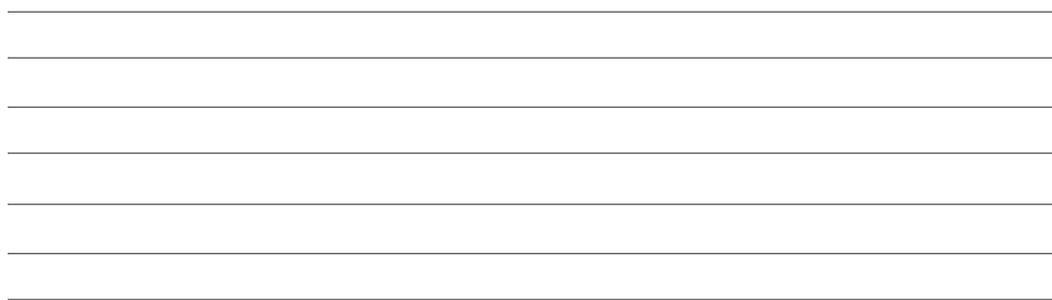

- Recessed square LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Aluminium body
- Opal plastic diffuser
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

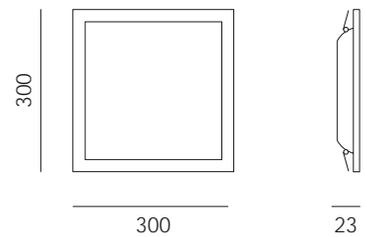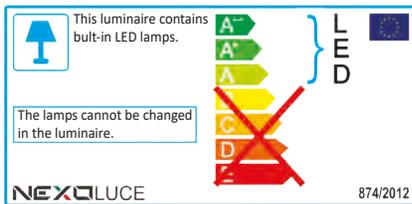


280 x 280

ACCESSORIES




3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: 015.0013.0

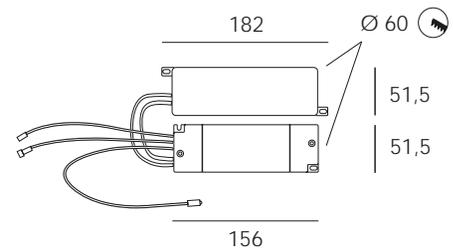

IP44Front **IP20**Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	24 W

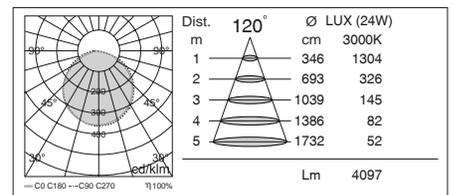

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5175	. WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.24 24 W	.Z 120°	1 ON / OFF	.A WHITE
			C 4000 K				

CODE EXAMPLE:

Recessed square panel with warm white light color at 3000K, IP44/IP20, 24W, ON/OFF control, frame white color without emergency kit

5175.9B.24.Z1.A



QUABLÓ 30

CEILING RECESSED




IP44

LED

30W

cod. 5176 /// QUABLÓ 30

- Recessed square LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside
- Aluminium body
- Opal plastic diffuser
- Available with 3 hours emergency kit
- Power supply included (Class 2)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

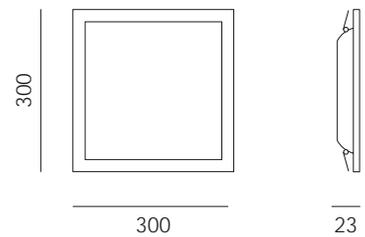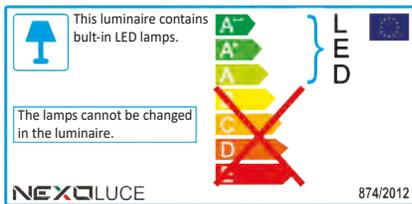


280 x 280

ACCESSORIES




3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

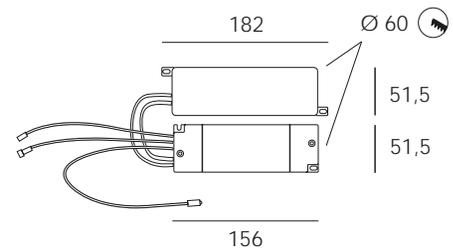

IP44Front **IP20**Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	30 W

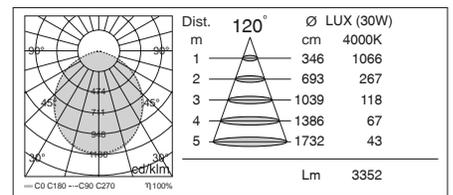

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5176	. WITHOUT EM. KIT	9 IP44/IP20	B 3000 K	.30 30 W	.Z 120°	1 ON / OFF	.A WHITE
			C 4000 K				

CODE EXAMPLE:

Recessed square panel with warm white light color at 3000K, IP44/IP20, 30W, ON/OFF control, frame white color without emergency kit

5176.9B.30.Z1.A



PLAFÓ 30

CEILING RECESSED

IP40




IP65

LED



30W

cod. 5179 /// PLAFÓ 30

- Recessed square LED panel light for suspended ceiling installation
- Aluminium body
- Opal plastic diffuser
- Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit
- Available with 3 hours emergency kit
- Power supply included (Class 2 for IP40, Class 1 for IP65)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

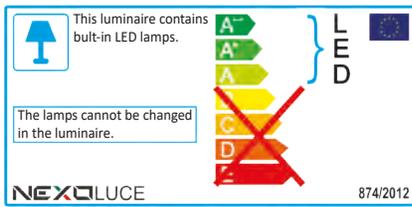

ACCESSORIES

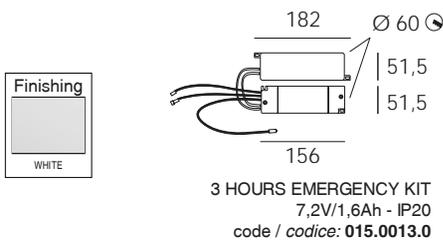


IP40

IP65 Front **IP40** Back



Lamp	Input	Power
LED	220/240Vac 50/60Hz	30 W

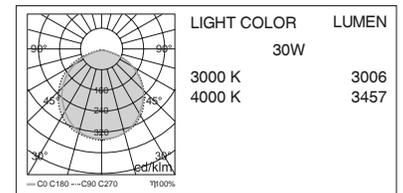

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5179	WITHOUT EM. KIT	2 IP40	B 3000 K	.30 30 W	.Z 120°	1 ON / OFF	.A WHITE
		C IP65/IP40	C 4000 K				

CODE EXAMPLE:

Recessed square panel with warm white light color at 3000K, IP40, 30W, 120° optic, ON/OFF control, frame white color without emergency kit

5179.2B.30.Z1.A



PLAFÓN 40

CEILING RECESSED

IP40




IP65

LED


40W

cod. 5180 /// PLAFÓN 40


- Recessed square LED panel light for suspended ceiling installation
- Aluminium body
- Opal plastic diffuser
- Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit
- Available with 3 hours emergency kit
- Power supply included (Class 2 for IP40, Class 1 for IP65)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

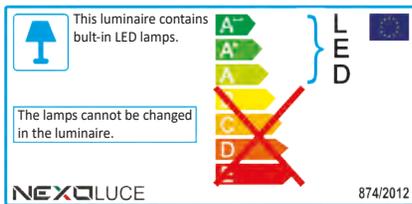


ACCESSORIES




3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / codice: **015.0013.0**



RECESSED FRAME KIT FOR
PLASTERBOARD / CORNICE PER
CARTONGESSO
code / codice: **003.0088.A**



SUSPENDED MOUNTING KIT 3mt /
KIT CAVI SOSPENSIONE 3mt
code / codice: **003.0072.0**




SURFACE MOUNTING KIT /
CORNICE A PLAFONE
code / codice: **003.0071.0**

IP40
IP65 Front **IP40** Back



Lamp	Input	Power
LED	220/240Vac 50/60Hz	40 W

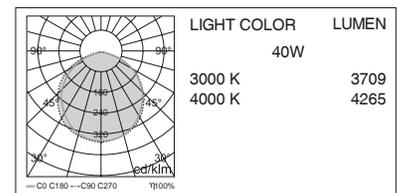

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5180	. WITHOUT EM. KIT	2 IP40	B 3000 K	.40 40 W	.Z 120°	1 ON / OFF	.A WHITE
		C IP65/IP40	C 4000 K				

CODE EXAMPLE:

Recessed square panel with warm white light color at 3000K, IP40, 40W, 120° optic, ON/OFF control, frame white color without emergency kit

5180.2B.40.Z1.A



PLAFÓ 50

CEILING RECESSED

IP40




IP65

LED



50W

cod. 5181 /// PLAFÓ 50

- Recessed square LED panel light for suspended ceiling installation
- Aluminium body
- Opal plastic diffuser
- Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit
- Available with 3 hours emergency kit
- Power supply included (Class 2 for IP40, Class 1 for IP65)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

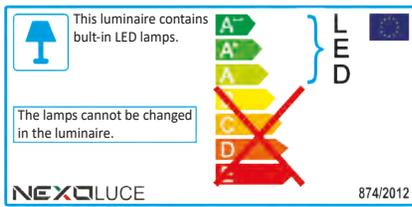


ACCESSORIES

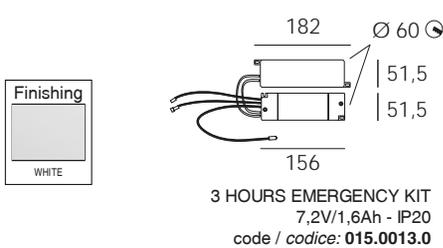

IP40
IP65 Front **IP40** Back



Lamp	Input	Power
LED	220/240Vac 50/60Hz	50 W

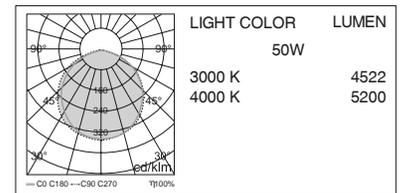

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5181	WITHOUT EM. KIT	2 IP40	B 3000 K	.50 50 W	.Z 120°	1 ON / OFF	.A WHITE
		C IP65/IP40	C 4000 K				

CODE EXAMPLE:

Recessed square panel with warm white light color at 3000K, IP40, 50W, 120° optic, ON/OFF control, frame white color without emergency kit

5181.2B.50.Z1.A



PLAFÓ 70

CEILING RECESSED

IP40




IP65

LED


70W

cod. 5182 /// PLAFÓ 70


- Recessed square LED panel light for suspended ceiling installation
- Aluminium body
- Opal plastic diffuser
- Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit
- Available with 3 hours emergency kit
- Power supply included (Class 2 for IP40, Class 1 for IP65)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

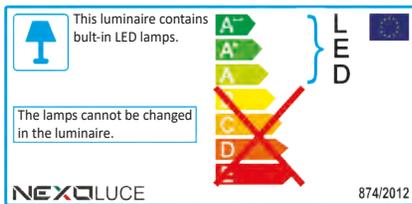


ACCESSORIES




3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / codice: **015.0013.0**



RECESSED FRAME KIT FOR
PLASTERBOARD / CORNICE PER
CARTONGESSO
code / codice: **003.0088.A**



SUSPENDED MOUNTING KIT 3mt /
KIT CAVI SOSPENSIONE 3mt
code / codice: **003.0072.0**




SURFACE MOUNTING KIT /
CORNICE A PLAFONE
code / codice: **003.0071.0**

IP40

IP65 Front **IP40** Back



Lamp	Input	Power
LED	220/240Vac 50/60Hz	70 W

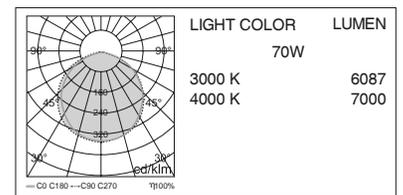

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5182	WITHOUT EM. KIT	2 IP40	B 3000 K	.70 70 W	.Z 120°	1 ON / OFF	.A WHITE
		C IP65/IP40	C 4000 K				

CODE EXAMPLE:

Recessed square panel with warm white light color at 3000K, IP40, 70W, 120° optic, ON/OFF control, frame white color without emergency kit

5182.2B.70.Z1.A



REGOLO S 18

CEILING RECESSED

IP40




IP65

LED


18W

cod. 5184 /// REGOLO S 18

- Recessed rectangular LED panel light for suspended ceiling installation
- Aluminium body
- Opal plastic diffuser
- Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit
- Available with 3 hours emergency kit
- Power supply included (Class 2 for IP40, Class 1 for IP65)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

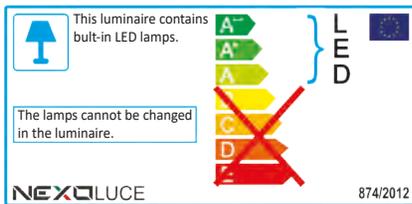


ACCESSORIES



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / codice: **015.0013.0**



RECESSED FRAME KIT FOR
PLASTERBOARD / CORNICE PER
CARTONGESSO
code / codice: **003.0107.A**



SUSPENDED MOUNTING KIT 3mt /
KIT CAVI SOSPENSIONE 3mt
code / codice: **003.0104.0**




SURFACE MOUNTING KIT /
CORNICE A PLAFONE
code / codice: **003.0103.0**

IP40
IP65 Front **IP40** Back



Lamp	Input	Power
LED	220/240Vac 50/60Hz	18 W

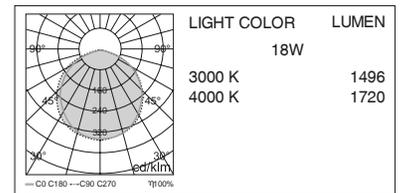

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5184	. WITHOUT EM. KIT	2 IP40	B 3000 K	.18 18 W	.Z 120°	1 ON / OFF	.A WHITE
		C IP65/IP40	C 4000 K				

CODE EXAMPLE:

Recessed rectangular panel with warm white light color at 3000K, IP40, 18W, 120° optic, ON/OFF control, frame white color without emergency kit **5184.2B.18.Z1.A**



REGOLO S 24

CEILING RECESSED

IP40





IP65

LED


24W

cod. 5185 /// REGOLO S 24


- Recessed rectangular LED panel light for suspended ceiling installation
- Aluminium body
- Opal plastic diffuser
- Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit
- Available with 3 hours emergency kit
- Power supply included (Class 2 for IP40, Class 1 for IP65)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

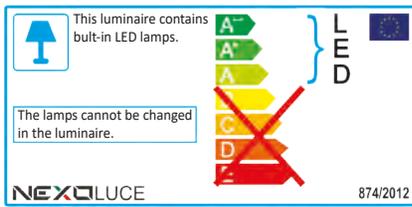

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / codice: **015.0013.0**



RECESSED FRAME KIT FOR
PLASTERBOARD / CORNICE PER
CARTONGESSO
code / codice: **003.0107.A**



SUSPENDED MOUNTING KIT 3mt /
KIT CAVI SOSPENSIONE 3mt
code / codice: **003.0104.0**




SURFACE MOUNTING KIT /
CORNICE A PLAFONE
code / codice: **003.0103.0**

ACCESSORIES

IP40
IP65 Front **IP40** Back



Lamp	Input	Power
LED	220/240Vac 50/60Hz	24 W

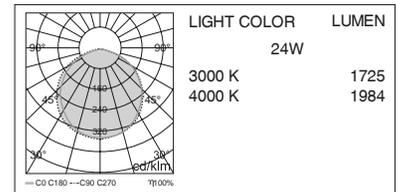

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5185	. WITHOUT EM. KIT	2 IP40	B 3000 K	.24 24 W	.Z 120°	1 ON / OFF	.A WHITE
		C IP65/IP40	C 4000 K				

CODE EXAMPLE:

Recessed rectangular panel with warm white light color at 3000K, IP40, 24W, 120° optic, ON/OFF control, frame white color without emergency kit **5185.2B.24.Z1.A**



REGOLO S 30

CEILING RECESSED

IP40






IP65

LED

30W

cod. 5186 /// REGOLO S 30

- Recessed rectangular LED panel light for suspended ceiling installation
- Aluminium body
- Opal plastic diffuser
- Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit
- Available with 3 hours emergency kit
- Power supply included (Class 2 for IP40, Class 1 for IP65)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

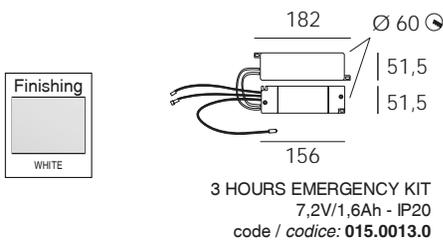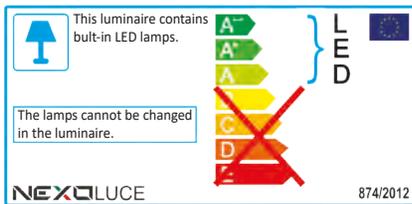


ACCESSORIES

IP40
IP65 Front **IP40** Back



Lamp	Input	Power
LED	220/240Vac 50/60Hz	30 W

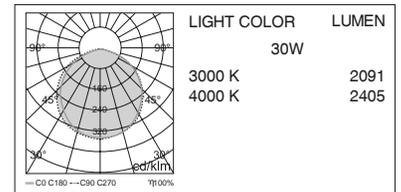

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5186	. WITHOUT EM. KIT	2 IP40	B 3000 K	.30 30 W	.Z 120°	1 ON / OFF	.A WHITE
		C IP65/IP40	C 4000 K				

CODE EXAMPLE:

Recessed rectangular panel with warm white light color at 3000K, IP40, 30W, 120° optic, ON/OFF control, frame white color without emergency kit **5186.2B.30.Z1.A**



REGOLO M 36

CEILING RECESSED

IP40




IP65

LED


36W

cod. 5187 /// REGOLO M 36

- Recessed rectangular LED panel light for suspended ceiling installation
- Aluminium body
- Opal plastic diffuser
- Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit
- Available with 3 hours emergency kit
- Power supply included (Class 2 for IP40, Class 1 for IP65)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

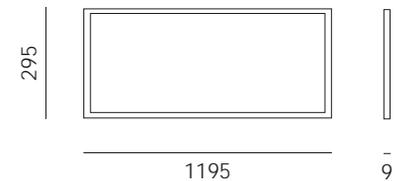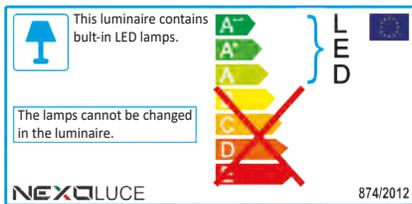


ACCESSORIES



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / codice: **015.0013.0**



RECESSED FRAME KIT FOR
PLASTERBOARD / CORNICE PER
CARTONGESSO
code / codice: **003.0106.A**



SUSPENDED MOUNTING KIT 3mt /
KIT CAVI SOSPENSIONE 3mt
code / codice: **003.0102.0**




SURFACE MOUNTING KIT /
CORNICE A PLAFONE
code / codice: **003.0101.0**

IP40
IP65 Front **IP40** Back



Lamp	Input	Power
LED	220/240Vac 50/60Hz	36 W

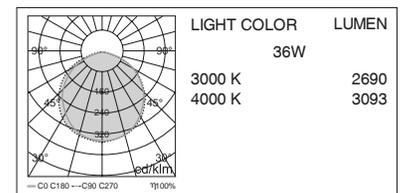

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5187	. WITHOUT EM. KIT	2 IP40	B 3000 K	.36 36 W	.Z 120°	1 ON / OFF	.A WHITE
		C IP65/IP40	C 4000 K				

CODE EXAMPLE:

Recessed rectangular panel with warm white light color at 3000K, IP40, 36W, 120° optic, ON/OFF control, frame white color without emergency kit **5187.2B.36.Z1.A**



REGOLO M 40

CEILING RECESSED

IP40




IP65

LED


40W

cod. 5188 /// REGOLO M 40

- Recessed rectangular LED panel light for suspended ceiling installation
- Aluminium body
- Opal plastic diffuser
- Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit
- Available with 3 hours emergency kit
- Power supply included (Class 2 for IP40, Class 1 for IP65)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

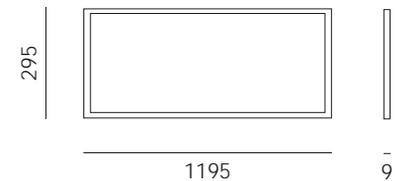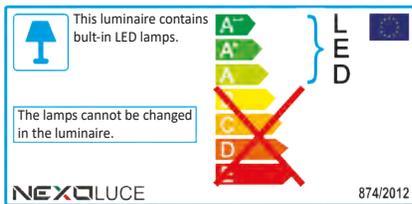


ACCESSORIES



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / codice: **015.0013.0**



RECESSED FRAME KIT FOR
PLASTERBOARD / CORNICE PER
CARTONGESSO
code / codice: **003.0106.A**



SUSPENDED MOUNTING KIT 3mt /
KIT CAVI SOSPENSIONE 3mt
code / codice: **003.0102.0**




SURFACE MOUNTING KIT /
CORNICE A PLAFONE
code / codice: **003.0101.0**

IP40
IP65 Front **IP40** Back



Lamp	Input	Power
LED	220/240Vac 50/60Hz	40 W

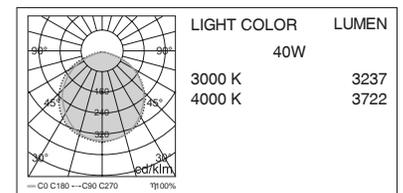

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5188	. WITHOUT EM. KIT	2 IP40	B 3000 K	.40 40 W	.Z 120°	1 ON / OFF	.A WHITE
		C IP65/IP40	C 4000 K				

CODE EXAMPLE:

Recessed rectangular panel with warm white light color at 3000K, IP40, 40W, 120° optic, ON/OFF control, frame white color without emergency kit **5188.2B.40.Z1.A**



REGOLO M 50

CEILING RECESSED

IP40




IP65

LED


50W

cod. 5189 /// REGOLO M 50

- Recessed rectangular LED panel light for suspended ceiling installation
- Aluminium body
- Opal plastic diffuser
- Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit
- Available with 3 hours emergency kit
- Power supply included (Class 2 for IP40, Class 1 for IP65)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

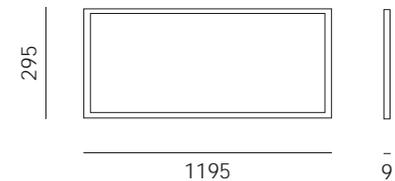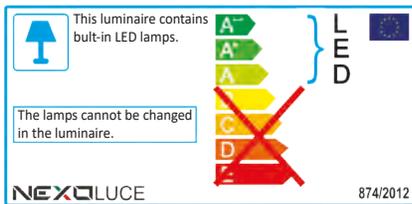


ACCESSORIES



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / codice: **015.0013.0**



RECESSED FRAME KIT FOR
PLASTERBOARD / CORNICE PER
CARTONGESSO
code / codice: **003.0106.A**



SUSPENDED MOUNTING KIT 3mt /
KIT CAVI SOSPENSIONE 3mt
code / codice: **003.0102.0**




SURFACE MOUNTING KIT /
CORNICE A PLAFONE
code / codice: **003.0101.0**

IP40
IP65 Front **IP40** Back



Lamp	Input	Power
LED	220/240Vac 50/60Hz	50 W

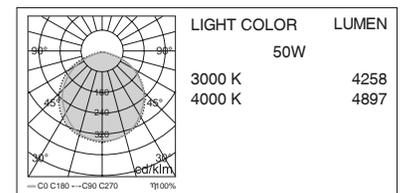

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5189	. WITHOUT EM. KIT	2 IP40	B 3000 K	.50 50 W	.Z 120°	1 ON / OFF	.A WHITE
		C IP65/IP40	C 4000 K				

CODE EXAMPLE:

Recessed rectangular panel with warm white light color at 3000K, IP40, 50W, 120° optic, ON/OFF control, frame white color without emergency kit **5189.2B.50.Z1.A**



REGOLO M 72

CEILING RECESSED

IP40




IP65

LED


72W

cod. 5190 /// REGOLO M 72

- Recessed rectangular LED panel light for suspended ceiling installation
- Aluminium body
- Opal plastic diffuser
- Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit
- Available with 3 hours emergency kit
- Power supply included (Class 2 for IP40, Class 1 for IP65)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

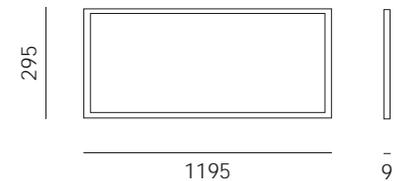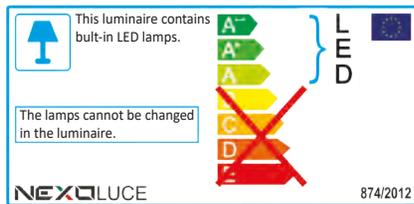


ACCESSORIES



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / codice: **015.0013.0**



RECESSED FRAME KIT FOR
PLASTERBOARD / CORNICE PER
CARTONGESSO
code / codice: **003.0106.A**



SUSPENDED MOUNTING KIT 3mt /
KIT CAVI SOSPENSIONE 3mt
code / codice: **003.0102.0**




SURFACE MOUNTING KIT /
CORNICE A PLAFONE
code / codice: **003.0101.0**

IP40
IP65 Front **IP40** Back



Lamp	Input	Power
LED	220/240Vac 50/60Hz	72 W

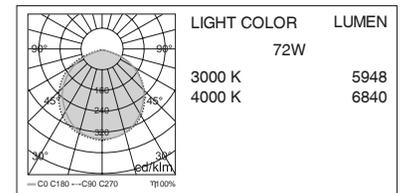

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5190	. WITHOUT EM. KIT	2 IP40	B 3000 K	.72 72 W	.Z 120°	1 ON / OFF	.A WHITE
		C IP65/IP40	C 4000 K				

CODE EXAMPLE:

Recessed rectangular panel with warm white light color at 3000K, IP40, 72W, 120° optic, ON/OFF control, frame white color without emergency kit **5190.2B.72.Z1.A**



REGOLO L 60

CEILING RECESSED

IP40




IP65

LED


60W

cod. 5191 /// REGOLO L 60

- Recessed rectangular LED panel light for suspended ceiling installation
- Aluminium body
- Opal plastic diffuser
- Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit
- Available with 3 hours emergency kit
- Power supply included (Class 2 for IP40, Class 1 for IP65)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

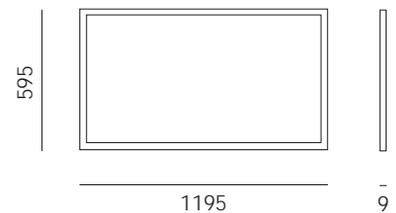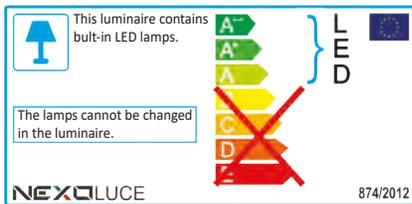


ACCESSORIES



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / codice: 015.0013.0



RECESSED FRAME KIT FOR
PLASTERBOARD / CORNICE PER
CARTONGESSO
code / codice: 003.0105.A



SUSPENDED MOUNTING KIT 3mt /
KIT CAVI SOSPENSIONE 3mt
code / codice: 003.0099.0




SURFACE MOUNTING KIT /
CORNICE A PLAFONE
code / codice: 003.0098.0

IP40
IP65 Front **IP40** Back



Lamp	Input	Power
LED	220/240Vac 50/60Hz	60 W

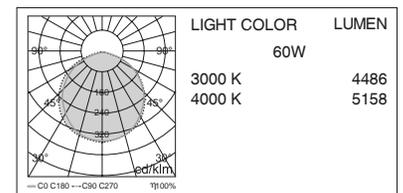

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5191	. WITHOUT EM. KIT	2 IP40	B 3000 K	.60 60 W	.Z 120°	1 ON / OFF	.A WHITE
		C IP65/IP40	C 4000 K				

CODE EXAMPLE:

Recessed rectangular panel with warm white light color at 3000K, IP40, 60W, 120° optic, ON/OFF control, frame white color without emergency kit **5191.2B.60.Z1.A**



REGOLO L 72

CEILING RECESSED

IP40




IP65

LED


72W

cod. 5192 /// REGOLO L 72

- Recessed rectangular LED panel light for suspended ceiling installation
- Aluminium body
- Opal plastic diffuser
- Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit
- Available with 3 hours emergency kit
- Power supply included (Class 2 for IP40, Class 1 for IP65)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

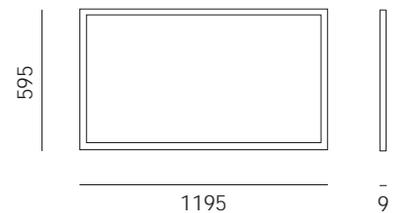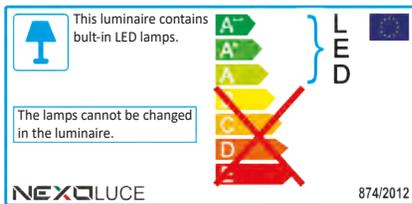


ACCESSORIES



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / codice: **015.0013.0**



RECESSED FRAME KIT FOR
PLASTERBOARD / CORNICE PER
CARTONGESSO
code / codice: **003.0105.A**



SUSPENDED MOUNTING KIT 3mt /
KIT CAVI SOSPENSIONE 3mt
code / codice: **003.0099.0**




SURFACE MOUNTING KIT /
CORNICE A PLAFONE
code / codice: **003.0098.0**

IP40
IP65 Front **IP40** Back



Lamp	Input	Power
LED	220/240Vac 50/60Hz	72 W

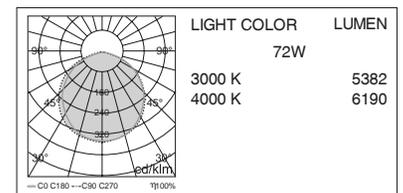

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5192	WITHOUT EM. KIT	2 IP40	B 3000 K	.72 72 W	.Z 120°	1 ON / OFF	.A WHITE
		C IP65/IP40	C 4000 K				

CODE EXAMPLE:

Recessed rectangular panel with warm white light color at 3000K, IP40, 72W, 120° optic, ON/OFF control, frame white color without emergency kit **5192.2B.72.Z1.A**



REGOLO L 84

CEILING RECESSED

IP40



IP65

LED


84W

cod. 5193 /// REGOLO L 84

- Recessed rectangular LED panel light for suspended ceiling installation
- Aluminium body
- Opal plastic diffuser
- Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit
- Available with 3 hours emergency kit
- Power supply included (Class 2 for IP40, Class 1 for IP65)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

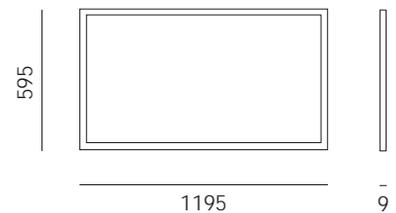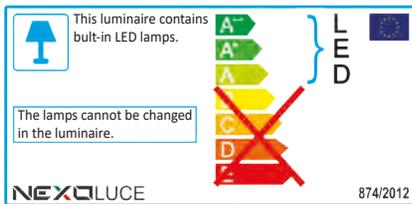


ACCESSORIES



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / codice: **015.0013.0**



RECESSED FRAME KIT FOR
PLASTERBOARD / CORNICE PER
CARTONGESSO
code / codice: **003.0105.A**



SUSPENDED MOUNTING KIT 3mt /
KIT CAVI SOSPENSIONE 3mt
code / codice: **003.0099.0**




SURFACE MOUNTING KIT /
CORNICE A PLAFONE
code / codice: **003.0098.0**

IP40
IP65 Front **IP40** Back



Lamp	Input	Power
LED	220/240Vac 50/60Hz	84 W

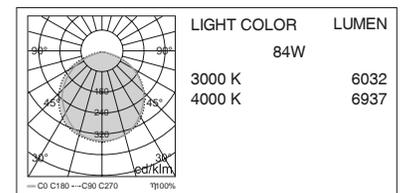

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5193	. WITHOUT EM. KIT	2 IP40	B 3000 K	.84 84 W	.Z 120°	1 ON / OFF	.A WHITE
		C IP65/IP40	C 4000 K				

CODE EXAMPLE:

Recessed rectangular panel with warm white light color at 3000K, IP40, 84W, 120° optic, ON/OFF control, frame white color without emergency kit **5193.2B.84.Z1.A**



PIANO

CEILING RECESSED




IP40



LED

30W

cod. 5441 /// PIANO

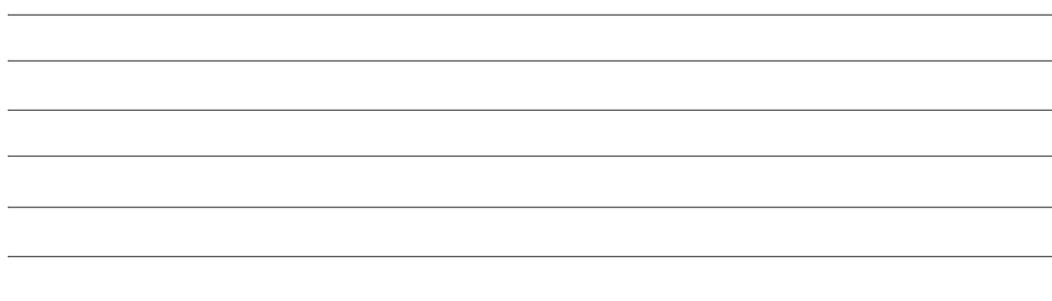


- Recessed LED linear lamp for indoor installation
- Aluminium body
- PMMA opal diffuser
- Equipped with springs for installation
- External power supply included
- Available with 3 hours emergency kit in a separate box
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)

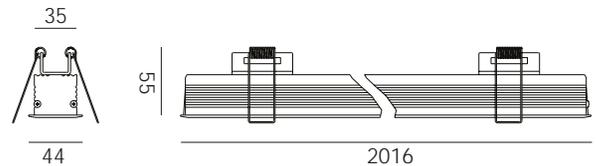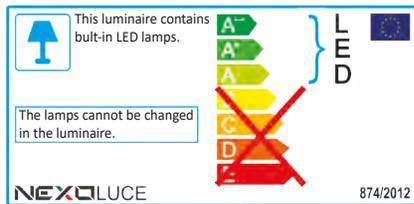

2013 x 38



ACCESSORIES

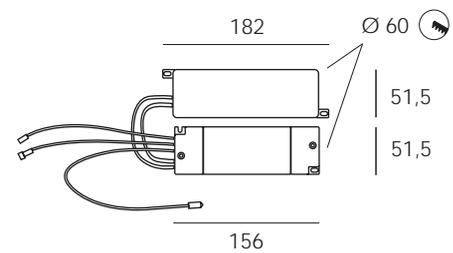

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

IP40

Lamp	Input	Power
LED	220/240Vac 50/60Hz	30 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5441	. WITHOUT EM. KIT	2 IP40	B 3000K	.30 30 W	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
			C 4000K				

CODE EXAMPLE:


Recessed ceiling light with stripled, IP40, 30W, opal diffuser, ON/OFF control, frame white color without emergency kit

5441.2B.30AD1.A




BANDIERA Q

WALL RECESSED



0-90°



- 45° 0 + 45°




IP20

LED


3W

cod. 5371 /// BANDIERA Q

- Wall adjustable reading light
- Stainless steel body
- Adjustable body position

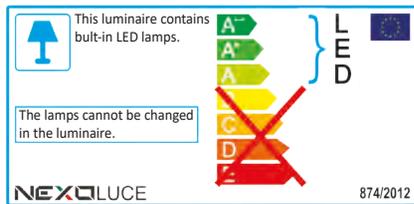

115 x 35



IP20

Lamp	Input	Power
LED	220/240Vac 50/60Hz	3 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5371	. WITHOUT EM. KIT	1 IP20	B 3000 K	.03 3 W	AS PRISMATIC DIFFUSER	1 ON/OFF	.D BLACK
			C 4000 K				.S BRUSHED CHROME

CODE EXAMPLE:

Reading LED light with warm white light color at 3000K, IP20, 3W, prismatic diffuser, ON/OFF control, frame brushed chrome color without emergency kit **5371.1B.03AS1.S**



SEGNO

WALL RECESSED



IP65

E27

MAX 20W

cod. 5245 /// SEGNO

- Recessed wall light
- Die-cast aluminium body
- Polyester powder paint
- Resistant to corrosion
- Polycarbonate opal cover
- Stainless steel external screws
- Plastic housing for installation included

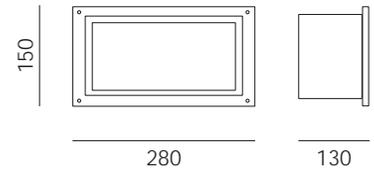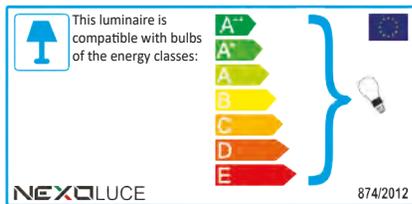

IP65

Lamp	Input	Power
E27	220/240Vac 50/60Hz	MAX 20 W

LAMP NOT INCLUDED

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5245	. WITHOUT EM. KIT	5 IP65	Z E27	M20 MAX 20 W	AD OPAL DIFFUSER	1 ON / OFF	.B GREY
							.C DARK GREY
							.D BLACK

CODE EXAMPLE:

Recessed wall light with E27 lamp, IP65, MAX 20W, opal diffuser, ON/OFF control, frame black color without emergency kit

5245.5ZM20AD1.D



SEGNO Q

WALL RECESSED



IP65

E27

MAX 20W

cod. 5248 /// SEGNO Q

- Recessed wall light
- Die-cast aluminium body
- Polyester powder paint
- Resistant to corrosion
- Polycarbonate clear cover
- Stainless steel external screws
- Plastic housing for installation included

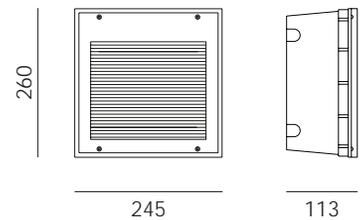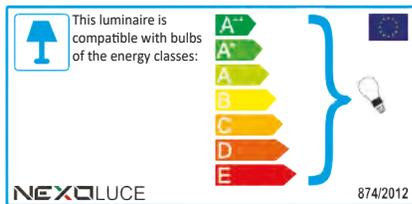

IP65

Lamp	Input	Power
E27	220/240Vac 50/60Hz	MAX 20 W

LAMP NOT INCLUDED

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5248	. WITHOUT EM. KIT	5 IP65	Z E27	M20 MAX 20 W	AX CLEAR DIFFUSER	1 ON / OFF	.B GREY
							.D BLACK

CODE EXAMPLE:

Recessed wall light with E27 lamp, IP65, MAX 20W, clear diffuser, ON/OFF control, frame grey color without emergency kit

5248.5ZM20AX1.B



SEGNO M

WALL RECESSED



IP65

LED

4,5W


cod. 5467 /// SEGNO M

- Wall recessed LED projector for indoor and outdoor use
- Single asymmetric emission
- Die-cast aluminium body
- Internal satin glass diffuser
- EPDM gasket
- Internal power supply
- Standard recessed box 503 included

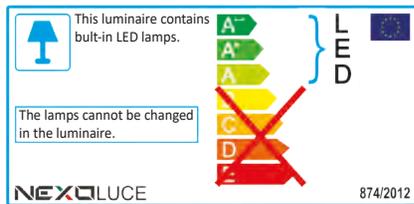

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	4,5 W

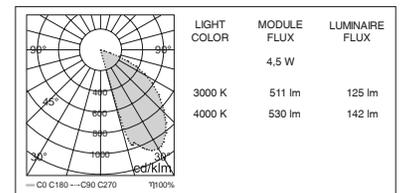


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5467	. WITHOUT EM. KIT	5 IP65	B 3000 K	A45 4,5 W	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
			C 4000 K				.B GREY
							.C DARK GREY

CODE EXAMPLE:

Wall recessed LED projector with light color at 3000K, IP65, 4,5W, opal diffuser, ON/OFF control, frame dark grey color without emergency kit **5467.5BA45AD1.C**

SURFACE



SPECCHIO


SURFACE

IP44




LED

3.6W

cod. 2154 /// SPECCHIO

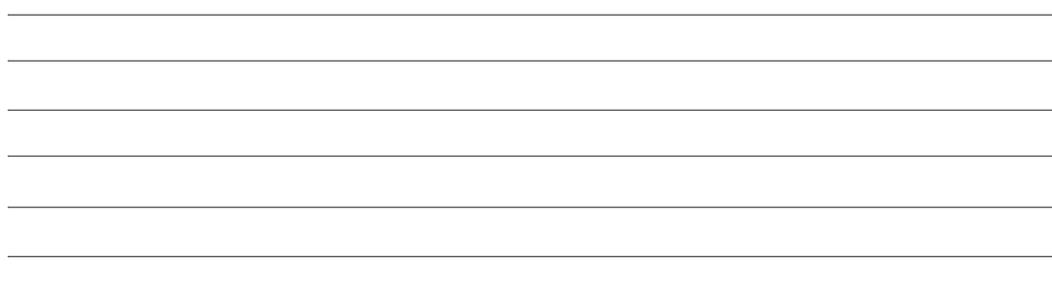


- Wall mirror light
- Aluminium and plastic body
- Plastic diffuser

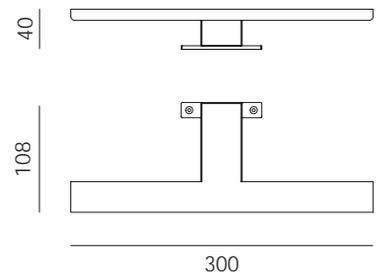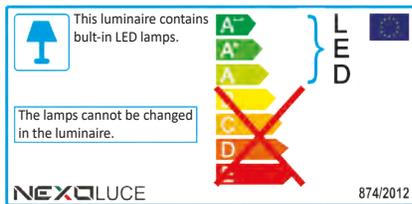

IP44

Lamp	Input	Power
LED	220/240Vac 50/60Hz	3.6 W

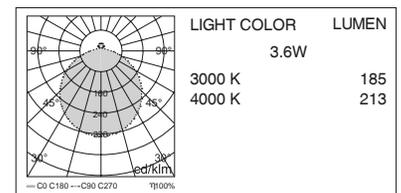


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
2154	WITHOUT EM. KIT	3 IP44	B 3000 K	.03 3.6 W	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
			C 4000 K				.J CHROME

CODE EXAMPLE:

Wall mirror light with warm white light color at 3000K, IP44, 3.6W, opal diffuser, ON/OFF control, frame white color without emergency kit

2154.3B.03AD1.A



SPECCHIO S

SURFACE

IP44




LED

12W

cod. 5031 /// SPECCHIO S




- Wall mirror light
- Aluminium and plastic body
- Plastic diffuser

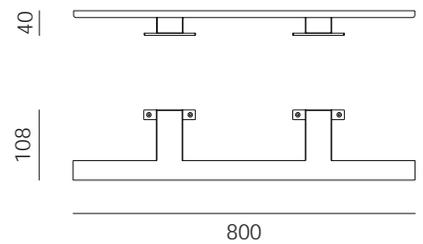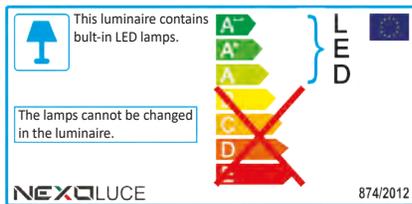

IP44

Lamp	Input	Power
LED	220/240Vac 50/60Hz	12 W

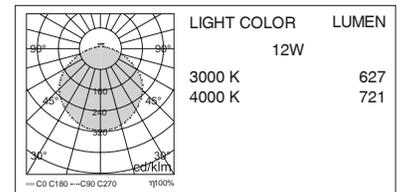


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5031	. WITHOUT EM. KIT	3 IP44	B 3000 K	.12 12 W	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
			C 4000 K				.J CHROME

CODE EXAMPLE:

Wall mirror light with warm white light color at 3000K, IP44, 12W, opal diffuser, ON/OFF control, frame white color without emergency kit

5031.3B.12AD1.A



SPECCHIO 4


SURFACE

IP44




LED

5W

cod. 5052 /// SPECCHIO 4

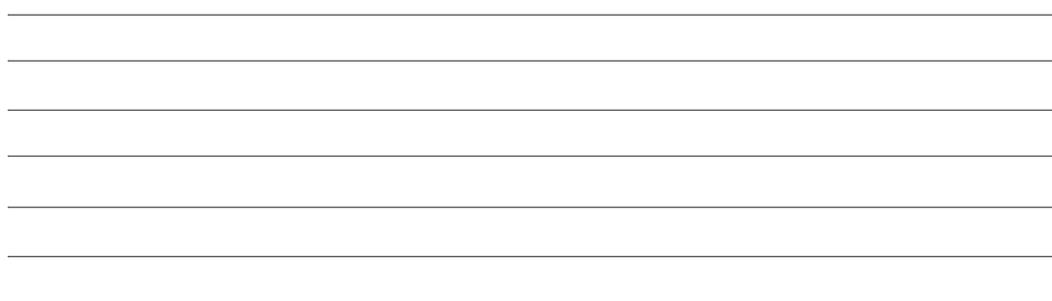


- Wall mirror light
- Metal body
- Plastic diffuser

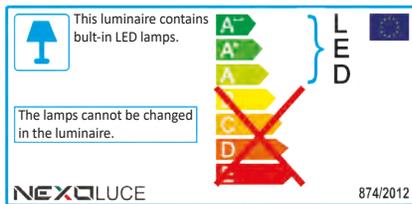

IP44

Lamp	Input	Power
LED	220/240Vac 50/60Hz	5 W

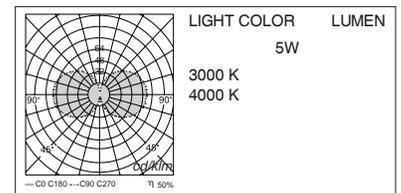


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5052	. WITHOUT EM. KIT	3 IP44	B 3000 K	.05 5 W	AD OPAL DIFFUSER	1 ON / OFF	.J CHROME
			C 4000 K				

CODE EXAMPLE:

Wall mirror light with warm white light color at 3000K, IP44, 5W, opal diffuser, ON/OFF control, frame chrome color without emergency kit

5052.3B.05AD1.J



DOPPIO FASCIO

SURFACE




IP65

E27

MAX 20W

cod. 5089 /// DOPPIO FASCIO

- Wall mounted light
- Double emission
- Die-cast painted aluminium housing
- Tempered safety glass diffuser
- Anodized aluminium reflector

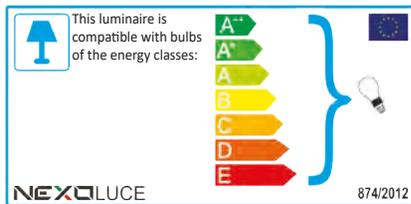

IP65

Lamp	Input	Power
E27	220/240Vac 50/60Hz	MAX 20 W


LAMP NOT INCLUDED

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5089	. WITHOUT EM. KIT	5 IP65	Z E27	M20 MAX 20 W	AG FROSTED DIFFUSER	1 ON / OFF	.B GREY
					AX CLEAR DIFFUSER		.D BLACK

CODE EXAMPLE:

Wall mounted light with E27 lamp, IP65, MAX 20W, frosted diffuser, ON/OFF control, frame grey color without emergency kit

5089.5ZM20AG1.B



FASCIO VERTICALE

SURFACE




IP65

2XE27

MAX 60W

cod. 5090 /// FASCIO VERTICALE


- Wall mounted light
- Double emission
- Metal body
- Tempered safety glass diffuser

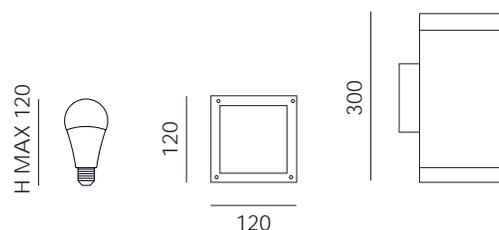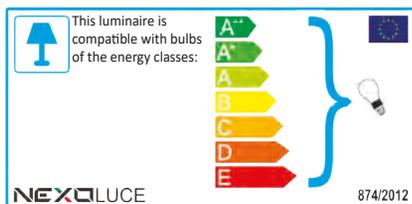

IP65

Lamp	Input	Power
E27	220/240Vac 50/60Hz	30 W

LAMP NOT INCLUDED

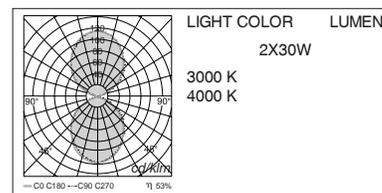


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5090	WITHOUT EM. KIT	5 IP65	P 2XE27	M60 MAX 60W	AG FROSTED DIFFUSER	1 ON / OFF	.C DARK GREY
							AE SILVER

CODE EXAMPLE:

Wall mounted light IP65, 2XE27, MAX 60W, frosted diffuser, ON/OFF control, frame dark grey color without emergency kit

5090.5PM60AG1.C



BLOCCHETTO

SURFACE




IP20

LED

22W


cod. 5088 /// BLOCCHETTO

- Wall mounted light
- Double emission
- Aluminium body
- Tempered safety glass diffuser
- Stainless steel screws

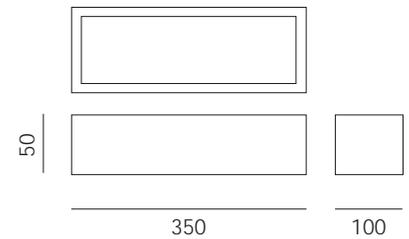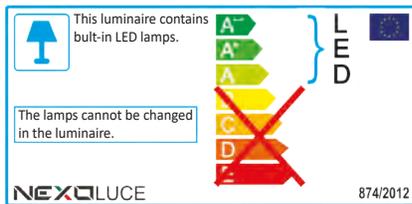

IP20

Lamp	Input	Power
LED	220/240Vac 50/60Hz	22 W

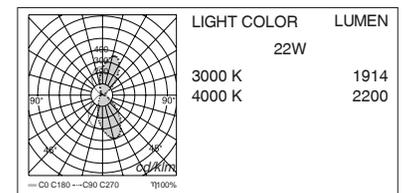

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5088	. WITHOUT EM. KIT	1 IP20	B 3000 K	.22 22 W	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
			C 4000 K				.D BLACK

CODE EXAMPLE:

Wall mounted light with warm white light color at 3000K, IP20, 22W, opal diffuser, ON/OFF control, frame white color without emergency kit

5088.1B.22AD1.A



BLOCCHETTO IP65

SURFACE




IP65

LED

20W


cod. 5466 /// BLOCCHETTO IP65

- Wall mounted LED projector
- Double emission
- Die-cast aluminium body
- Internally painted glass diffuser
- Aluminum reflector
- Silicone gasket
- Internal power supply

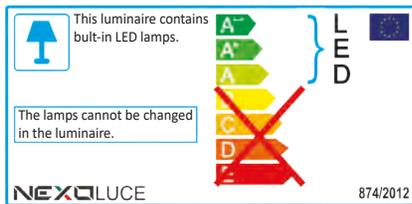

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	20 W

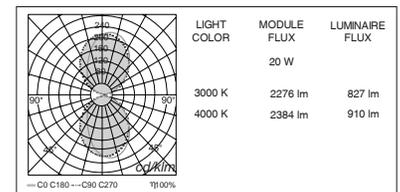

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5466	. WITHOUT EM. KIT	5 IP65	B 3000 K	.20 20 W	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
			C 4000 K				.B GREY
							.C DARK GREY

CODE EXAMPLE:

Wall mounted LED projector with light color at 3000K, IP65, 20W, opal diffuser, ON/OFF control, frame dark grey color without emergency kit

5466.5B.20AD1.C



BLOCCHETTO S IP65

SURFACE



IP65

LED

11W


cod. 5475 /// BLOCCHETTO S IP65

- Wall mounted LED projector
- Single emission
- Die-cast aluminium body
- Internally painted glass diffuser
- Aluminium reflector
- Silicone gasket
- Internal power supply

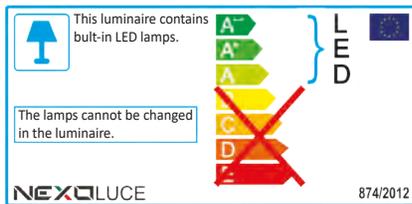

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	11 W

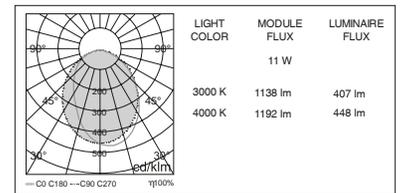


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5475	. WITHOUT EM. KIT	5 IP65	B 3000 K	.11 11 W	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
			C 4000 K				.B GREY
							.C DARK GREY

CODE EXAMPLE:

Wall mounted LED projector with light color at 3000K, IP65, 11W, opal diffuser, ON/OFF control, frame dark grey color without emergency kit

5475.5B.11AD1.C



TRONCHETTO LED

SURFACE




IP55

LED

30W

cod. 5514 /// TRONCHETTO LED

- Surface mounted light
- Led COB (90lm/W)
- Aluminium body
- Powder coating with special treatment for outdoor use
- Tempered safety glass diffuser
- Stainless steel screws
- Internal power supply

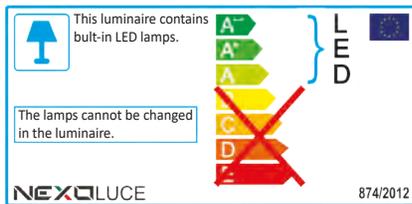


IP55

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	30 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR	
5514	. WITHOUT EM. KIT	Z IP55	B 3000 K	.30 30 W	.I 48°	1 ON / OFF	.A WHITE	
			C 4000 K		CV 48° FROST		0 DIMM. 0-10V	.B GREY
								.D BLACK

CODE EXAMPLE:

Surface LED mounted light with warm white light color at 3000K, IP55, 30W, 48° FROST optic, ON/OFF control, frame grey color without EM kit **5514.ZB.30CV1.B**



TRONCHETTO Q LED

SURFACE




IP55

LED

30W

cod. 5515 /// TRONCHETTO Q LED

- Surface mounted light
- Led COB (90lm/W)
- Aluminium body
- Powder coating with special treatment for outdoor use
- Tempered safety glass diffuser
- Stainless steel screws
- Internal power supply

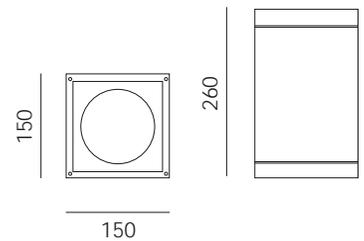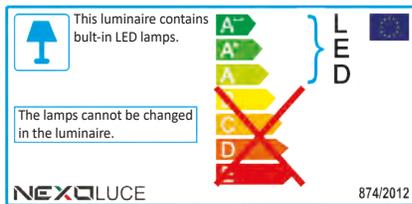


IP55

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	30 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5515	. WITHOUT EM. KIT	Z IP55	B 3000 K	.30 30 W	.I 48°	1 ON / OFF	.A WHITE
			C 4000 K		CV 48° FROST	0 DIMM. 0-10V	.B GREY
							.D BLACK

CODE EXAMPLE:

Surface LED mounted light with warm white light color at 3000K, IP55, 30W, 48° FROST optic, ON/OFF control, frame grey color without EM kit **5515.ZB.30CV1.B**



CIPPO 17 LED

SURFACE




IP20

LED

17W


cod. 5267 /// CIPPO 17 LED

- Surface mounted light
- Metal body
- Glass diffuser
- Available with 3 hours emergency kit

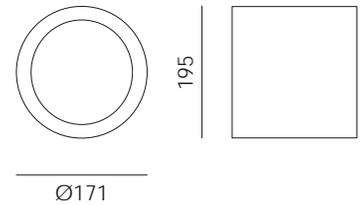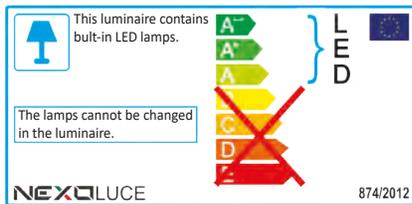

IP20


Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	17 W

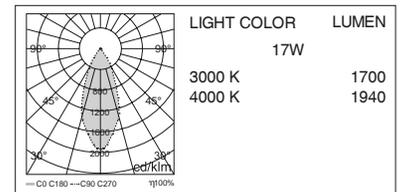

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5267	. WITHOUT EM. KIT	1 IP20	B 3000 K	.17 17 W	AX CLEAR DIFFUSER	1 ON / OFF	.A WHITE
	A 3H EM. KIT INTEGRATED		C 4000 K				

CODE EXAMPLE:

Surface mounted light with warm white light color at 3000K, IP20, 17W, clear diffuser, ON/OFF control, frame white color without emergency kit **5267.1B.17AD1.A**



CIPPO 29 LED

SURFACE




IP20

LED

29W

cod. 5307 /// CIPPO 29 LED

- Surface mounted light
- Metal body
- Glass diffuser
- Available with 3 hours emergency kit

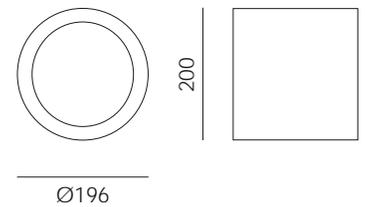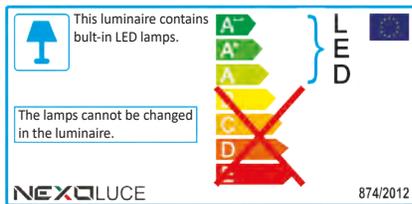


IP20

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	29 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5307	. WITHOUT EM. KIT	1 IP20	B 3000 K	.29 29 W	AX CLEAR DIFFUSER	1 ON / OFF	.A WHITE
	A 3H EM. KIT INTEGRATED		C 4000 K		AG FROST		

CODE EXAMPLE:

Surface mounted light with warm white light color at 3000K, IP20, 29W, clear diffuser, ON/OFF control, frame white color without emergency kit **5307.1B.29AX1.A**



COFANETTO Q LED

SURFACE



IP65

LED

12W


cod. 5271 /// COFANETTO Q LED

- Surface mounted light
- Plastic body
- Plastic diffuser
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

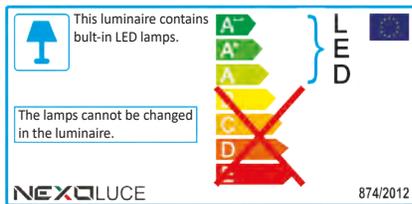


ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
*(TO BE WIRED INSIDE THE FIXTURE)
code: 015.0013.0

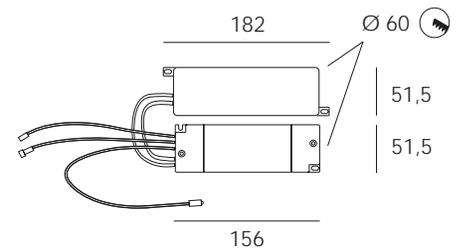

IP65


Lamp	Input	Power
LED	220/240Vac 50/60Hz	12 W

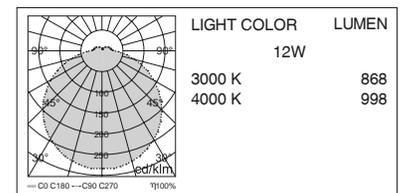

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5271	WITHOUT EM. KIT	5 IP65	B 3000 K	.12 12 W	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
			C 4000 K		AX CLEAR DIFFUSER		

CODE EXAMPLE:

Surface mounted light with warm white light color at 3000K, IP65, 12W, opal diffuser, ON/OFF control, frame white color without emergency kit **5271.5B.12AD1.A**



COFANETTO T LED

SURFACE

IP65

LED



15W

18W

24W


cod. 5272 /// COFANETTO T LED

- Surface mounted light
- Plastic body
- Plastic diffuser
- Available with 3 hours emergency kit
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

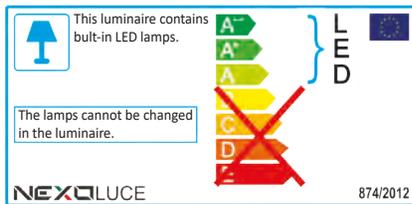


ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
*(TO BE WIRED INSIDE THE FIXTURE)
code: 015.0013.0

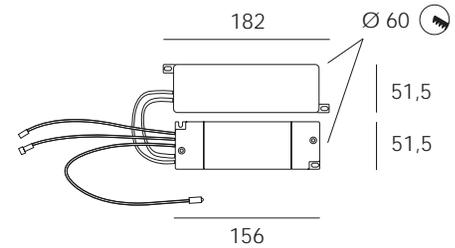

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	15 / 18 / 24 W

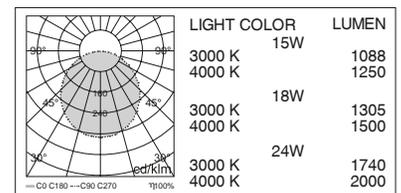


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5272	. WITHOUT EM. KIT	5 IP65	B 3000 K	.15 15 W	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
			C 4000 K	.18 18 W			
				.24 24 W			

CODE EXAMPLE:

Surface mounted light warm white light color at 3000K, IP65, 15W, opal diffuser, ON/OFF control, frame white color without emergency kit

5272.5B.15AD1.A



SOLE

SURFACE

IP66

E27




MAX 9W

MAX 23W

cod. 5009 /// SOLE




- Surface mounted light
- Die-cast aluminium body
- Glass diffuser, white painted inside
- Aluminium reflector
- Stainless steel closing screws

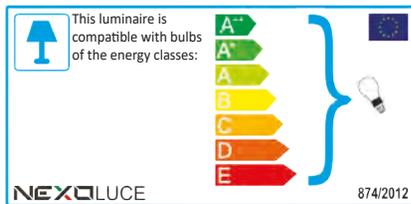

IP66

Lamp	Input	Power
E27 LED	220/240Vac 50/60Hz	MAX 9 W
E27 FL	220/240Vac 50/60Hz	MAX 23 W

LAMP NOT INCLUDED

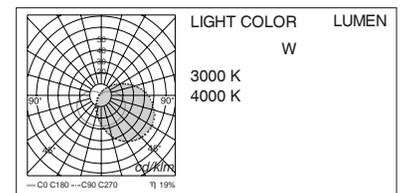


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5009	. WITHOUT EM. KIT	6 IP66	Z E27	M09 MAX 9 W	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
				M23 MAX 23 W			.B GREY
							.C DARK GREY

CODE EXAMPLE:

Surface mounted light with E27 lamp, IP66, MAX 23W, opal diffuser, ON/OFF control, frame white color without emergency kit

5009.6ZM23AD1.A



SOLE 2

SURFACE




IP66

E27

MAX 23W

cod. 5146 /// SOLE 2

- Surface mounted light
- Metal body
- Glass diffuser

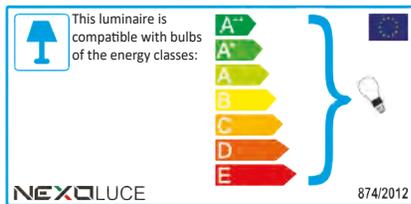

IP66

Lamp	Input	Power
E27	220/240Vac 50/60Hz	MAX 23 W


LAMP NOT INCLUDED

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5146	. WITHOUT EM. KIT	6 IP66	Z E27	M23 MAX 23 W	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
							.B GREY
							.C DARK GREY

CODE EXAMPLE:

Surface mounted light with E27 lamp, IP66, MAX 23W, opal diffuser, ON/OFF control, frame white color without emergency kit

5146.6ZM23AD1.A



TARTARUGA T

SURFACE




IP65

E27

MAX 60W

cod. 5318 /// TARTARUGA T


- Bulkhead light
- Die-cast aluminium body
- Glass diffuser, white painted inside
- Aluminium reflector
- Stainless steel closing screws

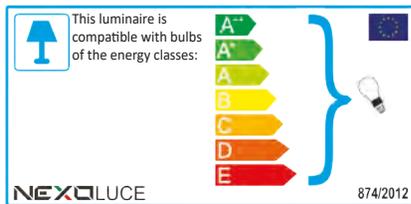

IP65

Lamp	Input	Power
E27	220/240Vac 50/60Hz	MAX 60 W

LAMP NOT INCLUDED

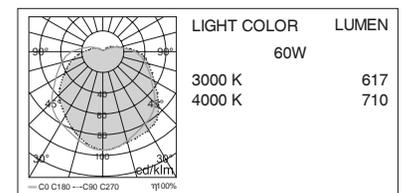

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5318	WITHOUT EM. KIT	5 IP65	Z E27	M60 MAX 60 W	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
							.B GREY
							.C DARK GREY

CODE EXAMPLE:

Bulkhead light with E27 lamp, IP65, MAX 60W, opal diffuser, ON/OFF control, frame white color without emergency kit

5318.5ZM60AD1.A



TARTARUGA

SURFACE


IP44

E27



MAX 9W

MAX 23W

cod. 5017 /// TARTARUGA

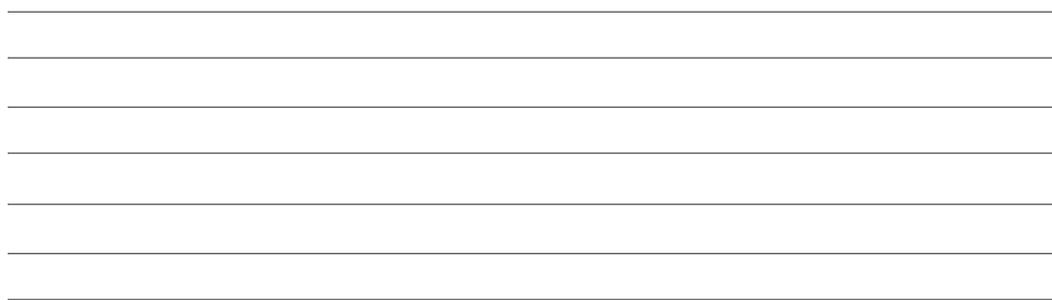


- Bulkhead light
- Plastic body
- Glass diffuser
- Aluminium cable-carry bracket
- Stainless steel closing screws

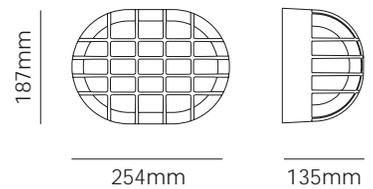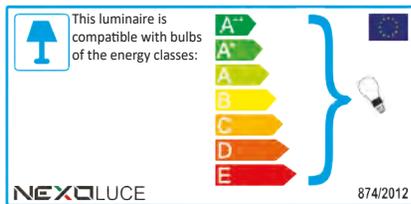

IP44

Lamp	Input	Power
E27 LED	220/240Vac 50/60Hz	MAX 9 W
E27 FL	220/240Vac 50/60Hz	MAX 23 W

LAMP NOT INCLUDED

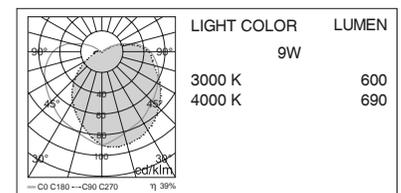


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5017	WITHOUT EM. KIT	3 IP44	Z E27	M09 MAX 9 W (LED)	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
				M23 MAX 23 W (FL)			.B GREY
							.C DARK GREY
							.D BLACK

CODE EXAMPLE:

Bulkhead light with E27 lamp, IP44, MAX 23W, opal diffuser, ON/OFF control, frame white color without emergency kit

5017.3ZM23AD1.A



TARTARUGA 2


SURFACE

IP66




E27

MAX 12W

cod. 5021 /// TARTARUGA 2

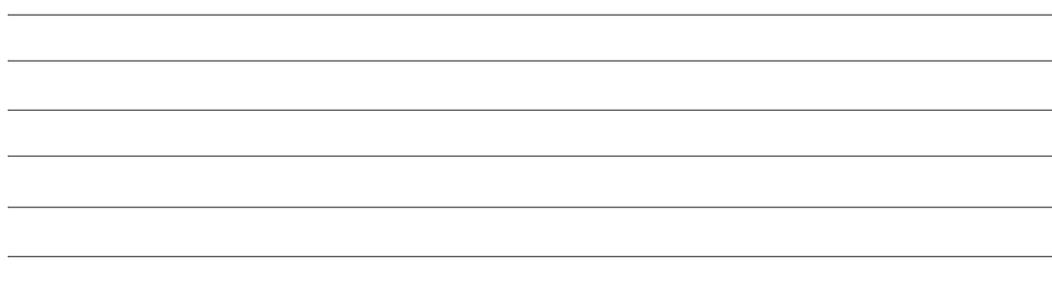


- Bulkhead light
- Die-cast aluminium body
- Glass diffuser
- Aluminium cable-carry bracket
- Stainless steel closing screws

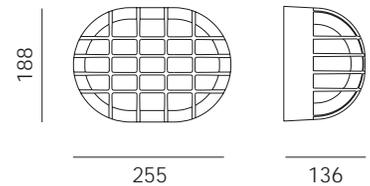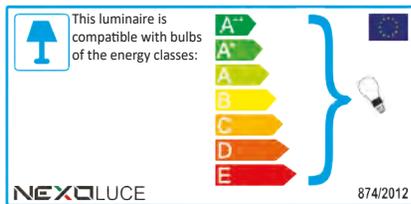

IP66

Lamp	Input	Power
E27 LED	220/240Vac 50/60Hz	MAX 12 W

LAMP NOT INCLUDED

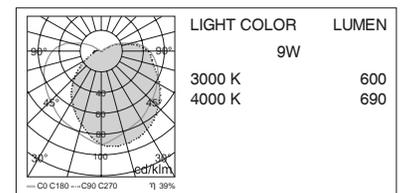


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5021	. WITHOUT EM. KIT	6 IP66	Z E27	M12 MAX 12 W (LED)	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
							.B GREY
							.C DARK GREY

CODE EXAMPLE:

Bulkhead light with E27 lamp, IP66, MAX 12W, opal diffuser, ON/OFF control, frame white color without emergency kit

5021.6ZM12AD1.A



TARTARUGA 3


SURFACE

IP65




E27

MAX 9W

cod. 5074 /// TARTARUGA 3

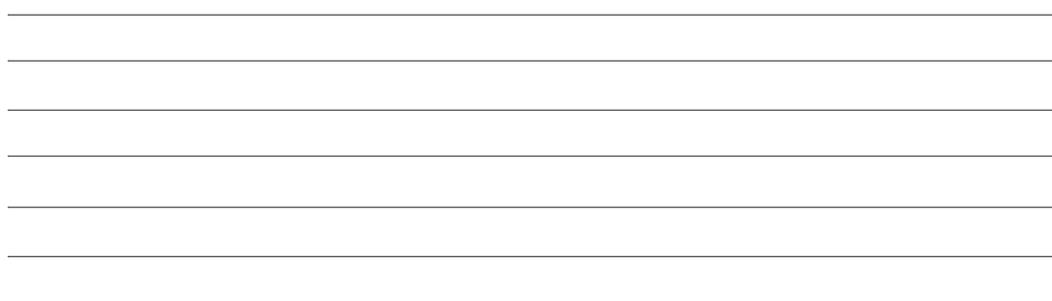


- Bulkhead light
- Metal body with polyester powder paint resistant to corrosion
- Glass diffuser
- Stainless steel closing screws

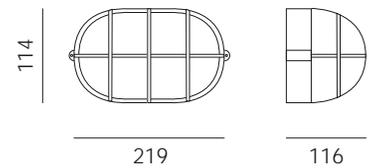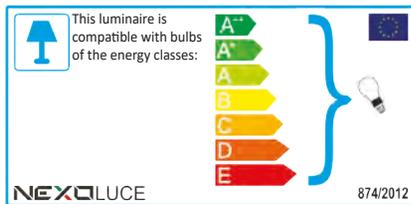

IP65

Lamp	Input	Power
E27 LED	220/240Vac 50/60Hz	MAX 9 W

LAMP NOT INCLUDED

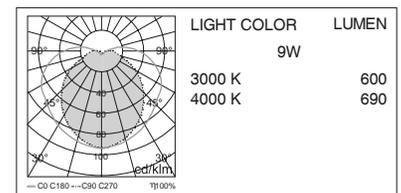


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5074	WITHOUT EM. KIT	5 IP65	Z E27	M09 MAX 9 W (LED)	AD OPAL DIFFUSER	1 ON / OFF	.A WHITE
							.B GREY
							.C DARK GREY

CODE EXAMPLE:

Bulkhead light with E27 lamp, IP65, MAX 9W, opal diffuser, ON/OFF control, frame white color without emergency kit

5074.5ZM09AD1.A



STAGNA 18 LED

SURFACE



IP66

LED

18W

cod. 5388 /// STAGNA 18 LED

- Surface mounted light for damp or dust environments and sheltered outdoor areas
- Body in injected polycarbonate with UV filter
- Prismatic polycarbonate diffuser with UV protection
- Stainless steel clips
- Stainless steel fixing brackets and suspension triangles included
- Polyurethane gasket
- Electronic ballast included
- Available with 3 hours emergency kit

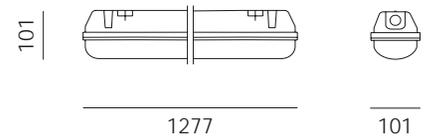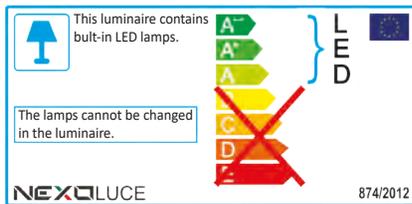


ACCESSORIES



SUSPENDED MOUNTING KIT
2,0mt LENGTH code: **003.0192.0**
5,0mt LENGTH code: **003.0131.0**

IP66


Lamp	Input	Power
LED	220/240Vac 50/60Hz	18 W

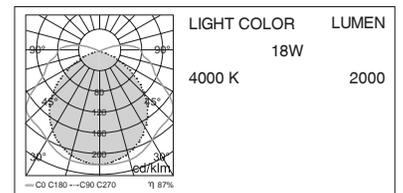

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5388	. WITHOUT EM. KIT	6 IP66	B 3000 K	.18 18 W	AD OPAL DIFFUSER	1 ON / OFF	.B GREY
	A 3H EM. KIT INTEGRATED		C 4000 K		AX CLEAR DIFFUSER		

CODE EXAMPLE:

Surface mounted light with natural white light color at 4000K, IP66, 18W, opal diffuser, ON/OFF control, frame grey color without emergency kit **5388.6C.18AD1.B**



STAGNA 28 LED

SURFACE



IP66

LED

28W

cod. 5389 /// STAGNA 28 LED

- Surface mounted light for damp or dust environments and sheltered outdoor areas
- Body in injected polycarbonate with UV filter
- Prismatic polycarbonate diffuser with UV protection
- Stainless steel clips
- Stainless steel fixing brackets and suspension triangles included
- Polyurethane gasket
- Electronic ballast included
- Available with 3 hours emergency kit

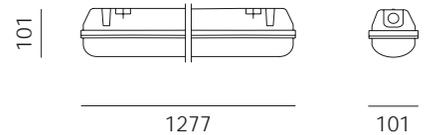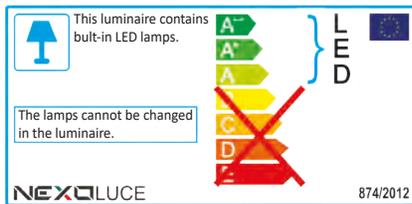


ACCESSORIES



SUSPENDED MOUNTING KIT
2,0mt LENGTH code: **003.0192.0**
5,0mt LENGTH code: **003.0131.0**

IP66


Lamp	Input	Power
LED	220/240Vac 50/60Hz	28 W

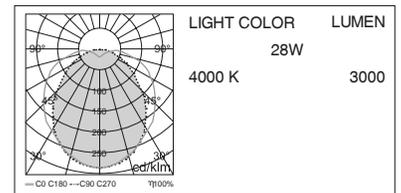

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5389	. WITHOUT EM. KIT	6 IP66	B 3000 K	.28 28 W	AD OPAL DIFFUSER	1 ON / OFF	.B GREY
	A 3H EM. KIT INTEGRATED		C 4000 K		AX CLEAR DIFFUSER		

CODE EXAMPLE:

Surface mounted light with natural white light color at 4000K, IP66, 28W, opal diffuser, ON/OFF control, frame grey color without emergency kit **5389.6C.28AD1.B**



STAGNA 36 LED

SURFACE



IP66

LED

36W

cod. 5390 /// STAGNA 36 LED

- Surface mounted light for damp or dust environments and sheltered outdoor areas
- Body in injected polycarbonate with UV filter
- Prismatic polycarbonate diffuser with UV protection
- Stainless steel clips
- Stainless steel fixing brackets and suspension triangles included
- Polyurethane gasket
- Electronic ballast included
- Available with 3 hours emergency kit

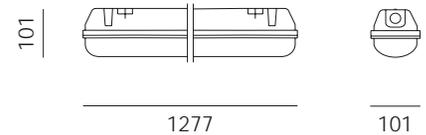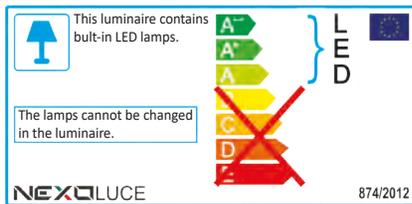


ACCESSORIES



SUSPENDED MOUNTING KIT
2,0mt LENGTH code: **003.0192.0**
5,0mt LENGTH code: **003.0131.0**

IP66


Lamp	Input	Power
LED	220/240Vac 50/60Hz	36 W

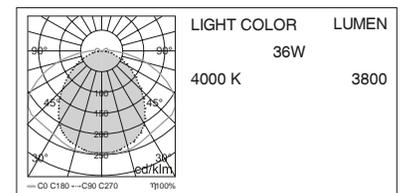

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5390	. WITHOUT EM. KIT	6 IP66	B 3000 K	.36 36 W	AD OPAL DIFFUSER	1 ON / OFF	.B GREY
	A 3H EM. KIT INTEGRATED		C 4000 K		AX CLEAR DIFFUSER		

CODE EXAMPLE:

Surface mounted light with natural white light color at 4000K, IP66, 36W, opal diffuser, ON/OFF control, frame grey color without emergency kit **5390.6C.36AD1.B**



STAGNA 50 LED

SURFACE



IP66

LED

50W

cod. 5391 /// STAGNA 50 LED

- Surface mounted light for damp or dust environments and sheltered outdoor areas
- Body in injected polycarbonate with UV filter
- Prismatic polycarbonate diffuser with UV protection
- Stainless steel clips
- Stainless steel fixing brackets and suspension triangles included
- Polyurethane gasket
- Electronic ballast included
- Available with 3 hours emergency kit

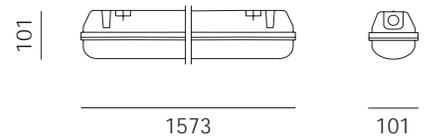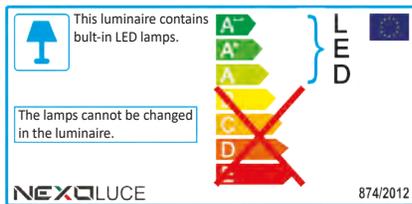


ACCESSORIES



SUSPENDED MOUNTING KIT
2,0mt LENGTH code: **003.0192.0**
5,0mt LENGTH code: **003.0131.0**

IP66

Lamp	Input	Power
LED	220/240Vac 50/60Hz	50 W

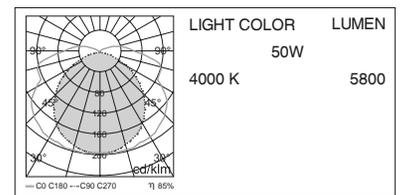

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5391	. WITHOUT EM. KIT	6 IP66	B 3000 K	.50 50 W	AD OPAL DIFFUSER	1 ON / OFF	.B GREY
	A 3H EM. KIT INTEGRATED		C 4000 K		AX CLEAR DIFFUSER		

CODE EXAMPLE:

Surface mounted light with natural white light color at 4000K, IP66, 50W, opal diffuser, ON/OFF control, frame grey color without emergency kit **5391.6C.50AD1.B**

PROJECTOR HIGH BAY



DRILLO 50 N

PROJECTOR



IP65

LED

50W


cod. 5455 /// DRILLO 50 N

- Outdoor projector with adjustable position
- Die-casting aluminium body and aluminium reflector
- Excellent waterproof performance and corrosion resistance
- Clear tempered glass diffuser
- Closure with steel clips, no screws
- Ultra-thin design
- View angle: 120°. Other optics available on request

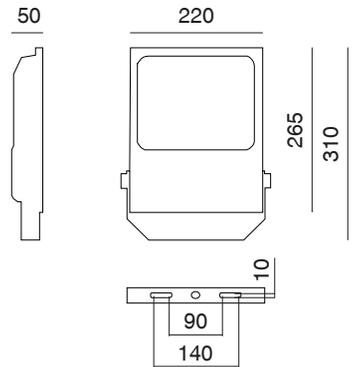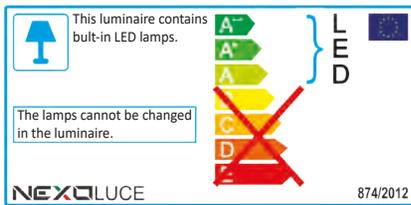

IP65

Lamp	Input	Power
LED	100/277Vac 50/60Hz	50 W

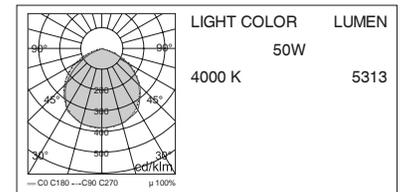

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5455	. WITHOUT EM. KIT	5 IP65	B 3000 K	.50 50 W	.Z 120°	1 ON / OFF	.D BLACK
			C 4000 K				

CODE EXAMPLE:

LED Projector with warm white light color at 3000K, IP65, 50W, 120° optic, ON/OFF control, frame black color without emergency kit

5455.5B.50.Z1.D



DRILLO 100 N

PROJECTOR




IP65

LED

100W


cod. 5456 /// DRILLO 100 N

- Outdoor projector with adjustable position
- Die-casting aluminium body and aluminium reflector
- Excellent waterproof performance and corrosion resistance
- Clear tempered glass diffuser
- Closure with steel clips, no screws
- Ultra-thin design
- View angle: 120°. Other optics available on request

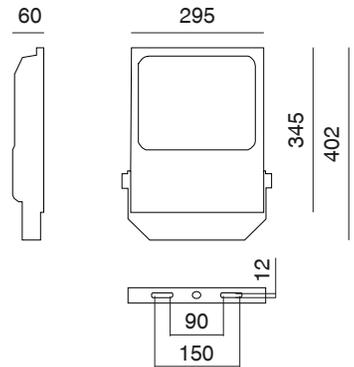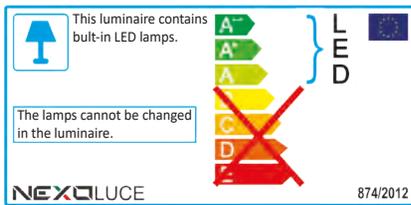

IP65

Lamp	Input	Power
LED	100/277Vac 50/60Hz	100 W

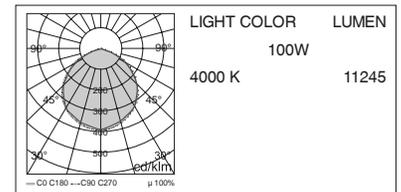

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5456	. WITHOUT EM. KIT	5 IP65	B 3000 K	100 100 W	.Z 120°	1 ON / OFF	.D BLACK
			C 4000 K				

CODE EXAMPLE:

LED Projector with warm white light color at 3000K, IP65, 100W, 120° optic, ON/OFF control, frame black color without emergency kit

5456.5B100.Z1.D



DRILLO 150 N

PROJECTOR



IP65

LED

150W


cod. 5457 /// DRILLO 150 N

- Outdoor projector with adjustable position
- Die-casting aluminium body and aluminium reflector
- Excellent waterproof performance and corrosion resistance
- Clear tempered glass diffuser
- Closure with steel clips, no screws
- Ultra-thin design
- View angle: 120°. Other optics available on request

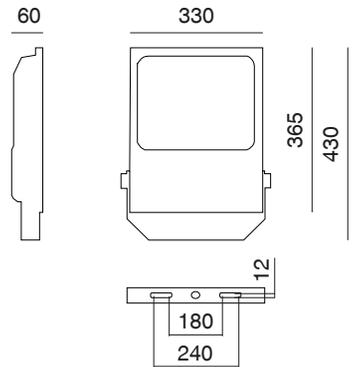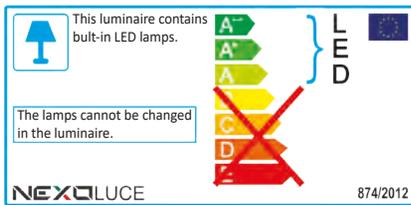

IP65

Lamp	Input	Power
LED	100/277Vac 50/60Hz	150 W

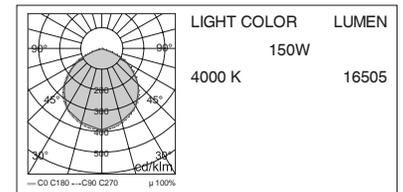


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5457	. WITHOUT EM. KIT	5 IP65	B 3000 K	150 150 W	.Z 120°	1 ON / OFF	.D BLACK
			C 4000 K				

CODE EXAMPLE:

LED Projector with warm white light color at 3000K, IP65, 150W, 120° optic, ON/OFF control, frame black color without emergency kit

5457.5B150.Z1.D



CAMPO 240

PROJECTOR



IP65

LED

240W

cod. 5480 /// CAMPO 240

- Outdoor projector with adjustable position
- Independent adjustable led modules
- Aluminium body and clear PC lens
- Excellent waterproof performance and corrosion resistance
- Led Philips chip and high quality Meanwell driver included
- Asymmetrical optic 50° x 90°
- 38400 lm

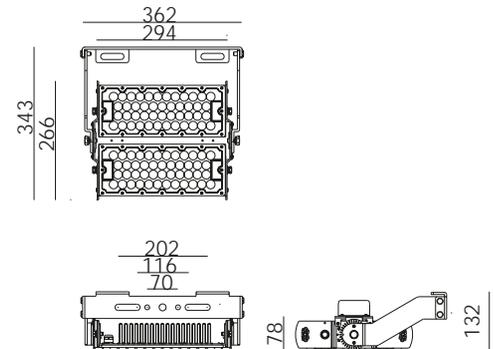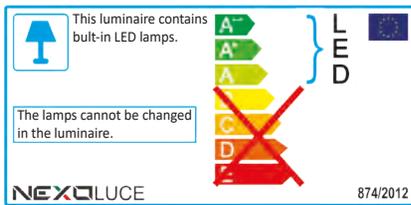

IP65

Lamp	Input	Power
LED	100-277Vac 50/60Hz	240 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5480	. WITHOUT EM. KIT	5 IP65	C 4000 K	240 240 W	CI 50° x 90°	1 ON / OFF	.D BLACK

CODE EXAMPLE:

Projector with light color at 4000K, IP65, 240W, asymmetrical 50°x90°, ON/OFF control, frame black color without emergency kit

5480.5C240CI1.D



CAMPO 320

PROJECTOR




IP65

LED

320W

cod. 5484 /// CAMPO 320

- Outdoor projector with adjustable position
- Independent adjustable led modules
- Aluminium body and clear PC lens
- Excellent waterproof performance and corrosion resistance
- Led Philips chip and high quality Meanwell driver included
- Asymmetrical optic 50° x 90°
- 51200 lm

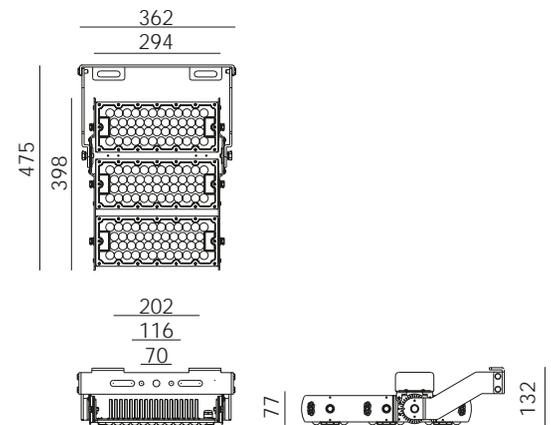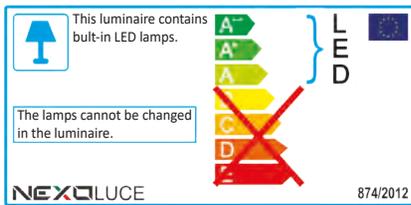

IP65

Lamp	Input	Power
LED	100-277Vac 50/60Hz	320 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5484	. WITHOUT EM. KIT	5 IP65	C 4000 K	320 320 W	CI 50° x 90°	1 ON / OFF	.D BLACK

CODE EXAMPLE:

Projector with light color at 4000K, IP65, 320W, asymmetrical 50°x90°, ON/OFF control, frame black color without emergency kit

5484.5C320C1.D



CAMPO 480

PROJECTOR




IP65

LED

480W

cod. 5485 /// CAMPO 480

- Outdoor projector with adjustable position
- Independent adjustable led modules
- Aluminium body and clear PC lens
- Excellent waterproof performance and corrosion resistance
- Led Philips chip and high quality Meanwell driver included
- Asymmetrical optic 50° x 90°
- 76800 lm

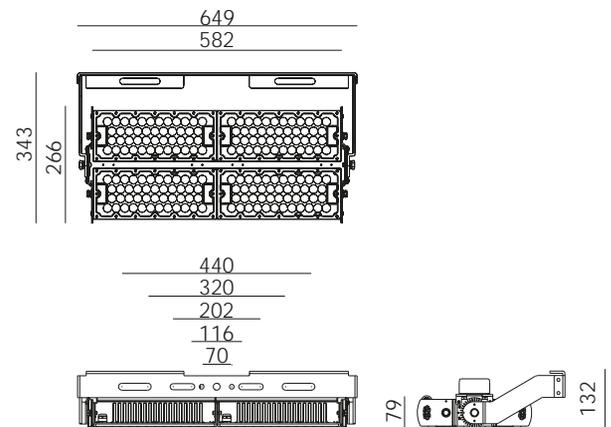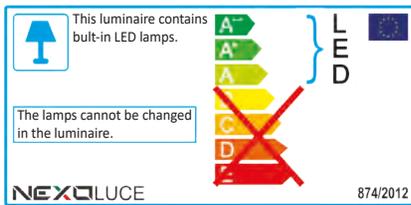

IP65

Lamp	Input	Power
LED	100-277Vac 50/60Hz	480 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5485	. WITHOUT EM. KIT	5 IP65	C 4000 K	480 480 W	CI 50° x 90°	1 ON / OFF	.D BLACK

CODE EXAMPLE:

Projector with light color at 4000K, IP65, 480W, asymmetrical 50°x90°, ON/OFF control, frame black color without emergency kit

5485.5C480C1.D



CAMPO 720

PROJECTOR





IP65

LED

720W

cod. 5473 /// CAMPO 720

- Outdoor projector with adjustable position
- Independent adjustable led modules
- Aluminium body and clear PC lens
- Excellent waterproof performance and corrosion resistance
- Led Philips chip and high quality Meanwell driver included
- Asymmetrical optic 50° x 90°
- 115200 lm

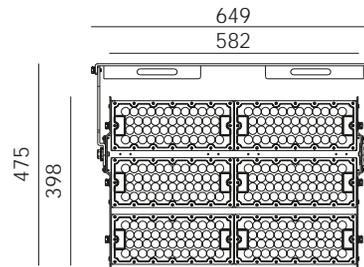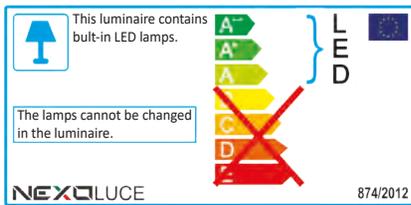

IP65

Lamp	Input	Power
LED	100-277Vac 50/60Hz	720 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5473	. WITHOUT EM. KIT	5 IP65	C 4000 K	720 720 W	CI 50° x 90°	1 ON / OFF	.D BLACK

CODE EXAMPLE:

Projector with light color at 4000K, IP65, 720W, asymmetrical 50°x90°, ON/OFF control, frame black color without emergency kit

5473.5C720C1.D



CAMPO 960

PROJECTOR



IP65

LED

960W

cod. 5486 /// CAMPO 960

- Outdoor projector with adjustable position
- Independent adjustable led modules
- Aluminium body and clear PC lens
- Excellent waterproof performance and corrosion resistance
- Led Philips chip and high quality Meanwell driver included
- Asymmetrical optic 50° x 90°
- 153600 lm

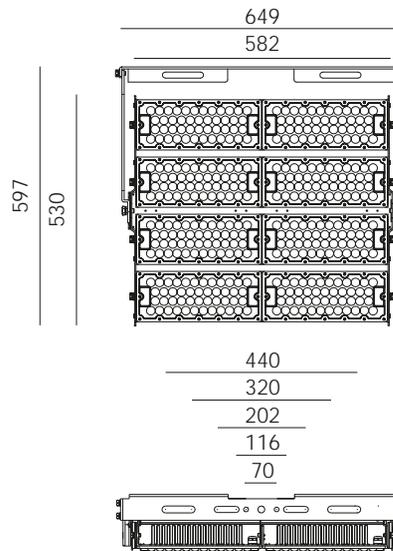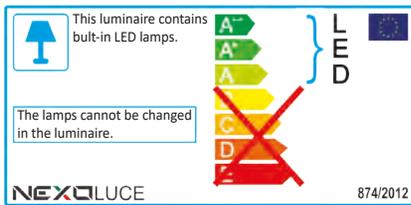

IP65

Lamp	Input	Power
LED	100-277Vac 50/60Hz	960 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5486	. WITHOUT EM. KIT	5 IP65	C 4000 K	960 960 W	CI 50° x 90°	1 ON / OFF	.D BLACK

CODE EXAMPLE:

Projector with light color at 4000K, IP65, 960W, asymmetrical 50°x90°, ON/OFF control, frame black color without emergency kit

5486.5C960C1.D



CAMPO 1200

PROJECTOR




IP65

LED

1200W

cod. 5487 /// CAMPO 1200

- Outdoor projector with adjustable position
- Independent adjustable led modules
- Aluminium body and clear PC lens
- Excellent waterproof performance and corrosion resistance
- Led Philips chip and high quality Meanwell driver included
- Asymmetrical optic 50° x 90°
- 192000 lm

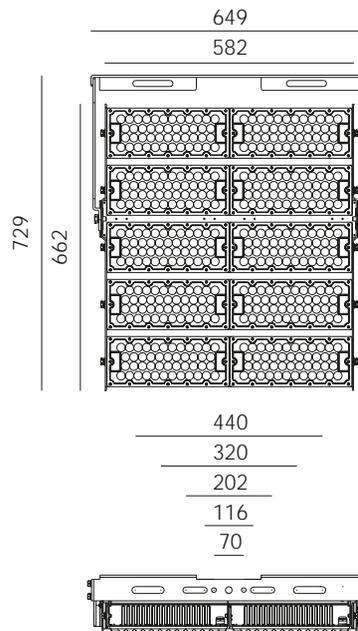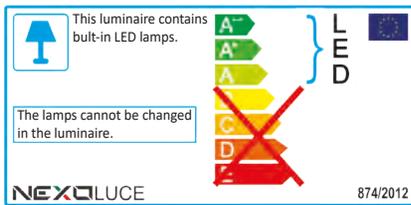

IP65

Lamp	Input	Power
LED	100-277Vac 50/60Hz	1200 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5487	. WITHOUT EM. KIT	5 IP65	C 4000 K	.MA 1200 W	CI 50° x 90°	1 ON / OFF	.D BLACK

CODE EXAMPLE:

Projector with light color at 4000K, IP65, 1200W, asymmetrical 50° x 90°, ON/OFF control, frame black color without emergency kit

5487.5C.MAC1.D



CAMPO 1440

PROJECTOR




IP65

LED

1440W

cod. 5488 /// CAMPO 1440

- Outdoor projector with adjustable position
- Independent adjustable led modules
- Aluminium body and clear PC lens
- Excellent waterproof performance and corrosion resistance
- Led Philips chip and high quality Meanwell driver included
- Asymmetrical optic 50° x 90°
- 230400 lm

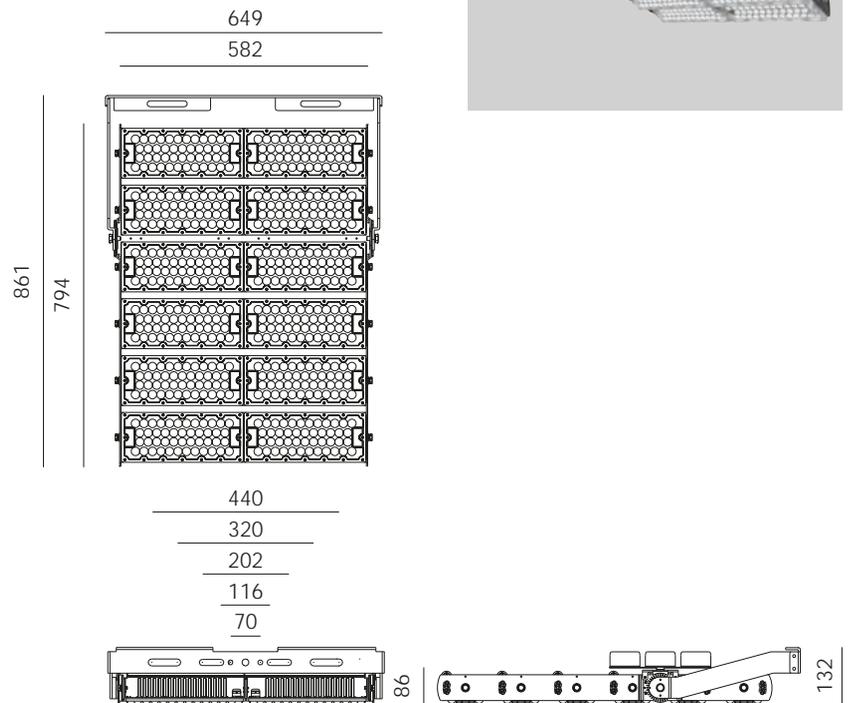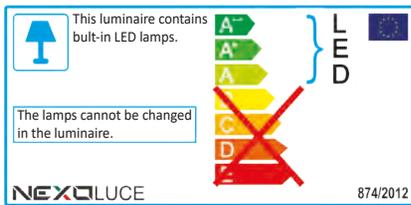

IP65

Lamp	Input	Power
LED	100-277Vac 50/60Hz	1440 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5488	. WITHOUT EM. KIT	5 IP65	C 4000 K	.MB 1440 W	CI 50° x 90°	1 ON / OFF	.D BLACK

CODE EXAMPLE:

Projector with light color at 4000K, IP65, 1440W, asymmetrical 50° x 90°, ON/OFF control, frame black color without emergency kit

5488.5C.MBC11.D



MIRA 100

HIGH BAY




IP65

LED

100W

cod. 5293 /// MIRA 100

- High bay LED projector
- Die-cast aluminium body
- Super brightness led Philips chip and high quality Lifud driver included

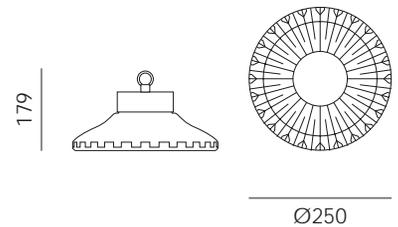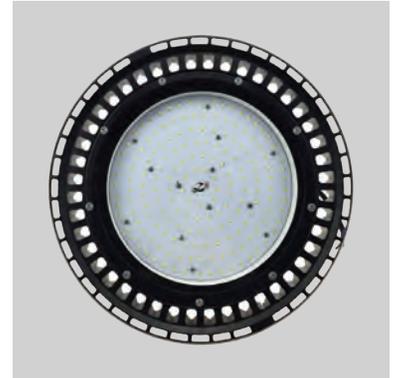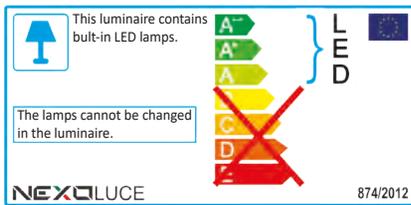


ACCESSORIES



SUSPENDED MOUNTING KIT
5mt LENGTH
code: 003.0114.0

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	100 W

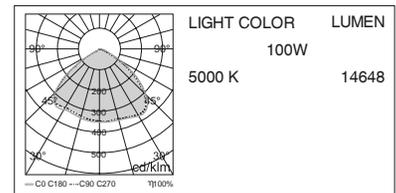

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5293	. WITHOUT EM. KIT	5 IP65	B 3000 K	100 100 W	.Z 120°	1 ON / OFF	.D BLACK
			C 4000 K				
			D 5000 K				

CODE EXAMPLE:

High bay light with light color at 3000K, IP65, 100W, 120° optic, ON/OFF control, frame black color without emergency kit

5293.5B100.Z1.D



MIRA 150

HIGH BAY




IP65

LED

150W

cod. 5294 /// MIRA 150

- High bay LED projector
- Die-cast aluminium body
- Super brightness led Philips chip and high quality Lifud driver included

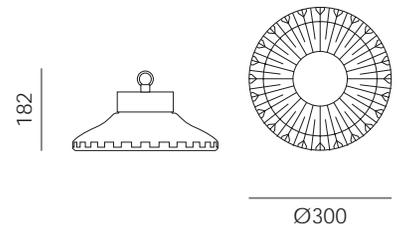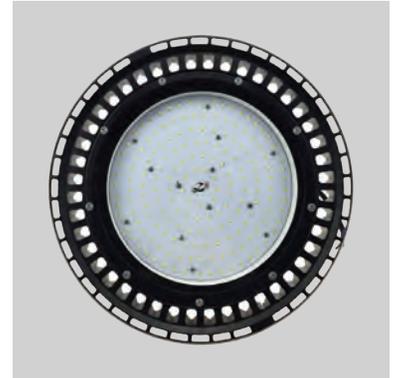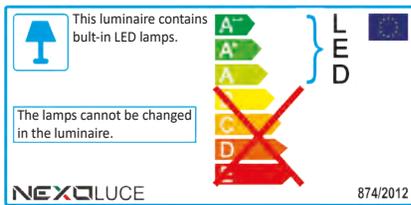


ACCESSORIES



SUSPENDED MOUNTING KIT
5mt LENGTH
code: 003.0114.0

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	150 W

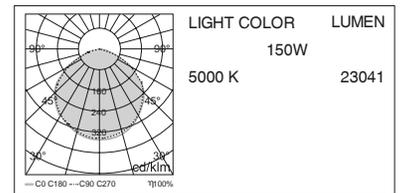

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5294	. WITHOUT EM. KIT	5 IP65	B 3000 K	150 150 W	.Z 120°	1 ON / OFF	.D BLACK
			C 4000 K				
			D 5000 K				

CODE EXAMPLE:

High bay light with light color at 3000K, IP65, 150W, 120° optic, ON/OFF control, frame black color without emergency kit

5294.5B150.Z1.D



MIRA 200

HIGH BAY




IP65

LED

200W

cod. 5295 /// MIRA 200

- High bay LED projector
- Die-cast aluminium body
- Super brightness led Philips chip and high quality Lifud driver included

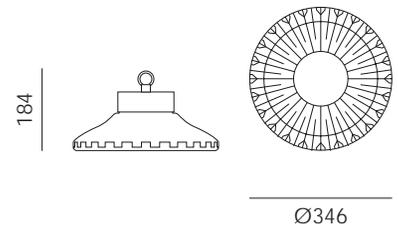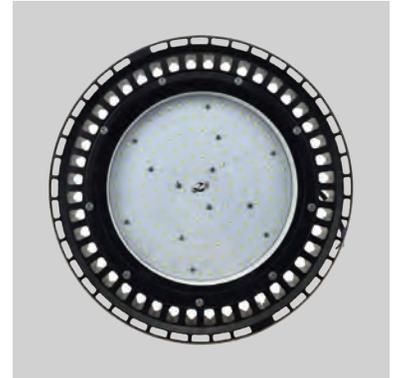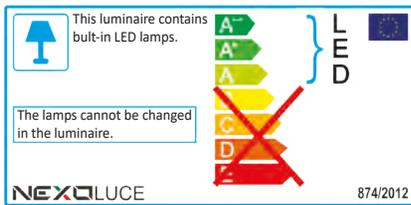


ACCESSORIES



SUSPENDED MOUNTING KIT
5mt LENGTH
code: 003.0114.0

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	200 W

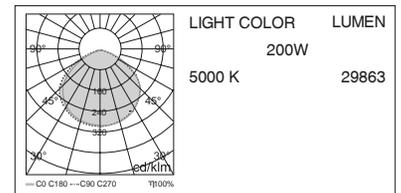


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5295	. WITHOUT EM. KIT	5 IP65	B 3000 K	200 200 W	.Z 120°	1 ON / OFF	.D BLACK
			C 4000 K				
			D 5000 K				

CODE EXAMPLE:

High bay light with light color at 3000K, IP65, 200W, 120° optic, ON/OFF control, frame black color without emergency kit

5295.5B200.Z1.D



RIMESSA 60

HIGH BAY






IP65

LED

60W

cod. 5418 /// RIMESSA 60

- High bay LED linear light
- Standard suspended mounting kit included (1,8mt length)
- Aluminium body
- Polycarbonate lens
- System efficacy up to 130lm/W
- Luminous flux 7800lm
- Available in black/red or silver color finishing
- Available with brackets for ceiling mounting (not included)
- Available with suspended mounting kit 5mt length (not included)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

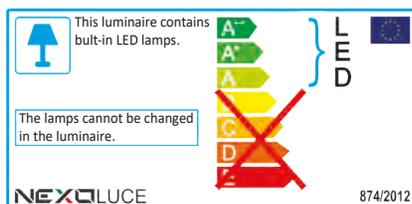

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP65 METAL CASE
*(TO BE WIRED INSIDE THE FIXTURE)
code: **015.0015.0**



SUSPENDED MOUNTING KIT
5mt LENGTH
code: **003.0091.0**


ACCESSORIES



CEILING INSTALLATION KIT
code: **003.0056.D - BLACK**
code: **003.0063AE - SILVER**

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	60 W

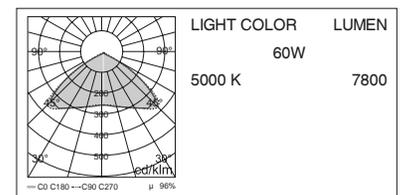


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5418	. WITHOUT EM. KIT	5 IP65	B 3000 K	.60 60 W	.Z 120°	1 ON / OFF	.D BLACK
			C 4000 K			7 DIMM. DALI	AE SILVER
			D 5000 K				

CODE EXAMPLE:

High bay light with light color at 5000K, IP65, 60W, 120° optic, ON/OFF control, frame silver color without emergency kit

5418.5D.60.Z1AE



RIMESSA 90

HIGH BAY




IP65

LED

90W

cod. 5419 /// RIMESSA 90

- High bay LED linear light
- Standard suspended mounting kit included (1,8mt length)
- Aluminium body
- Polycarbonate lens
- System efficacy up to 130lm/W
- Luminous flux 12150lm
- Available in black/red or silver color finishing
- Available with brackets for ceiling mounting (not included)
- Available with suspended mounting kit 5mt length (not included)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

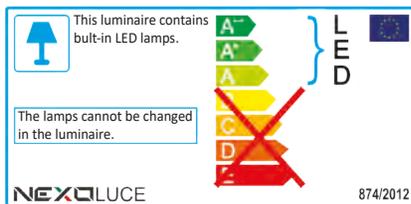


3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP65 METAL CASE
*(TO BE WIRED INSIDE THE FIXTURE)
code: **015.0015.0**



SUSPENDED MOUNTING KIT
5mt LENGTH
code: **003.0091.0**


ACCESSORIES



CEILING INSTALLATION KIT
code: **003.0056.D - BLACK**
code: **003.0063.AE - SILVER**

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	90 W

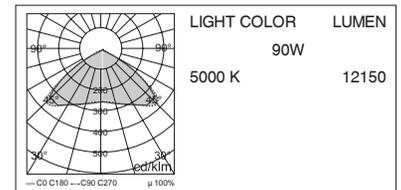


CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5419	. WITHOUT EM. KIT	5 IP65	B 3000 K	.90 90 W	.Z 120°	1 ON / OFF	.D BLACK
			C 4000 K			7 DIMM. DALI	AE SILVER
			D 5000 K				

CODE EXAMPLE:

High bay light with light color at 5000K, IP65, 90W, 120° optic, ON/OFF control, frame silver color without emergency kit

5419.5D.90.Z1AE



RIMESSA 120

HIGH BAY





IP65

LED

120W

cod. 5417 /// RIMESSA 120

- High bay LED linear light
- Standard suspended mounting kit included (1,8mt length)
- Aluminium body
- Polycarbonate lens
- System efficacy up to 130lm/W
- Luminous flux 16200lm
- Available in black/red or silver color finishing
- Available with brackets for ceiling mounting (not included)
- Available with suspended mounting kit 5mt length (not included)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

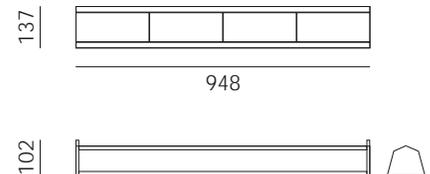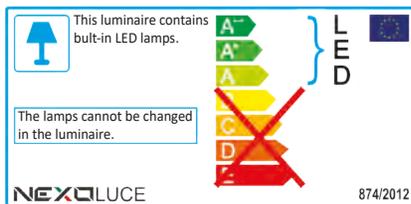

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP65 METAL CASE
*(TO BE WIRED INSIDE THE FIXTURE)
code: **015.0015.0**



SUSPENDED MOUNTING KIT
5mt LENGTH
code: **003.0091.0**


ACCESSORIES



CEILING INSTALLATION KIT
code: **003.0056.D - BLACK**
code: **003.0063AE - SILVER**

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	120 W

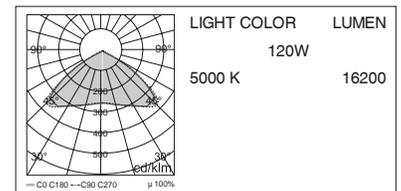

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5417	WITHOUT EM. KIT	5 IP65	B 3000 K	120 120 W	.Z 120°	1 ON / OFF	.D BLACK
			C 4000 K			7 DIMM. DALI	AE SILVER
			D 5000 K				

CODE EXAMPLE:

High bay light with light color at 5000K, IP65, 120W, 120° optic, ON/OFF control, frame silver color without emergency kit

5417.5D120.Z1AE



RIMESSA 150

HIGH BAY





IP65

LED

150W

cod. 5420 /// RIMESSA 150

- High bay LED linear light
- Standard suspended mounting kit included (1,8mt length)
- Aluminium body
- Polycarbonate lens
- System efficacy up to 130lm/W
- Luminous flux 20250lm
- Available in black/red or silver color finishing
- Available with brackets for ceiling mounting (not included)
- Available with suspended mounting kit 5mt length (not included)
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

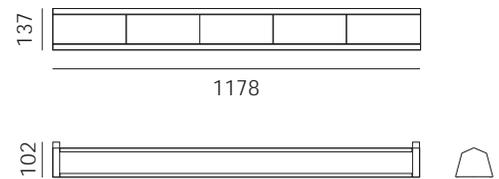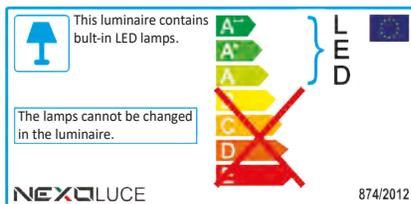


3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP65 METAL CASE
*(TO BE WIRED INSIDE THE FIXTURE)
code: **015.0015.0**



SUSPENDED MOUNTING KIT
5mt LENGTH
code: **003.0091.0**


ACCESSORIES



CEILING INSTALLATION KIT
code: **003.0056.D - BLACK**
code: **003.0063AE - SILVER**

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	150 W

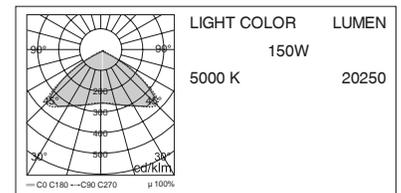

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5420	WITHOUT EM. KIT	5 IP65	B 3000 K	150 150 W	.Z 120°	1 ON / OFF	.D BLACK
			C 4000 K			7 DIMM. DALI	AE SILVER
			D 5000 K				

CODE EXAMPLE:

High bay light with light color at 5000K, IP65, 150W, 120° optic, ON/OFF control, frame silver color without emergency kit

5420.5D150.Z1AE



RIMESSA 180

HIGH BAY





IP65

LED

180W

cod. 5422 /// RIMESSA 180

- High bay LED linear light
- Standard suspended mounting kit included (1,8mt length)
- Aluminium body
- Polycarbonate lens
- System efficacy up to 130lm/W
- Luminous flux 24300lm
- Available in black/red or silver color finishing
- Available with brackets for ceiling mounting (not included)
- Available with suspended mounting kit 5mt length (not included)***
- Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

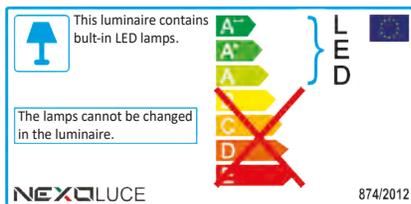

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP65 METAL CASE
*(TO BE WIRED INSIDE THE FIXTURE)
code: 015.0015.0



SUSPENDED MOUNTING KIT
5mt LENGTH
code: 003.0091.0
*** 2 kits are required to
suspend 1 5422 RIMESSA 180


ACCESSORIES



CEILING INSTALLATION KIT
code: 003.0064.D - BLACK
code: 003.0065AE - SILVER

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	180 W



LIGHT COLOR 5000 K
LUMEN 180W 24300

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5422	. WITHOUT EM. KIT	5 IP65	B 3000 K	180 180 W	.Z 120°	1 ON / OFF	.D BLACK
			C 4000 K			7 DIMM. DALI	.AE SILVER
			D 5000 K				

CODE EXAMPLE:

High bay light with light color at 5000K, IP65, 180W, 120° optic, ON/OFF control, frame silver color without emergency kit

5422.5D180.Z1AE



GUARDIA

PROJECTOR



IP65

XE

70W
100W
150W

cod. 5091 /// GUARDIA


- Security monitoring projector with keyboard control
- Casting aluminium/ABS
- Toughened glass lampshade
- Joystick or keyboard control included
- Available with yoke with pan/tilt movement made in stainless steel

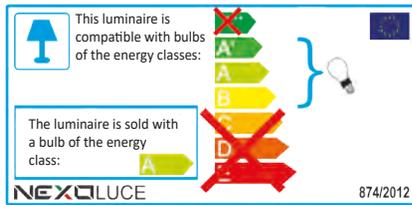

YOKE WITH PAN/TILT
MOVEMENT / STAFFA PER
MOVIMENTO PAN/TILT
code / codice: **003.0108.G**



ACCESSORIES



IP65

Lamp	Input	Power
HID XENON	220/240Vac 50/60Hz	70 / 100 / 150 W

LAMP CHARACTERISTICS

POWER	FLUX
70W	7000lm
100W	10000lm
150W	15000lm

CRI Ra>95
EFFECTIVE RANGE 1500m
LAMP LIFETIME (HOURS) 6000h

LAMP INCLUDED

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5091	WITHOUT EM. KIT	5 IP65	B 3000 K	.70 70 W	.A 6°	1 ON / OFF	AL SILVER
			Q 6000 K	100 100 W			
			R 8000 K	150 150 W			

CODE EXAMPLE:

Projector with light color at 6000K, IP65, 100W, 6° optic, ON/OFF control, frame silver color without emergency kit

5091.5Q100.A1AL

SIGNAGE



FUGA LED

SIGNAGE

IP40

LED



2,4W

2,6W

2,9W

cod. 5298 /// FUGA LED

- Spotlight emergency luminaires
- PC+ABS body
- Two Optics available: **NARROW** for corridors/escape routes and **WIDE** for open areas
- Recessed or surface mounting (accessories included)
- Available with 3 hours EM. kit integrated (non maintained) or configured for central battery system 230V AC (CBS 230V AC) and 24V DC (CBS 24V DC)

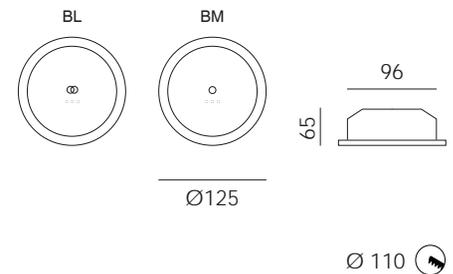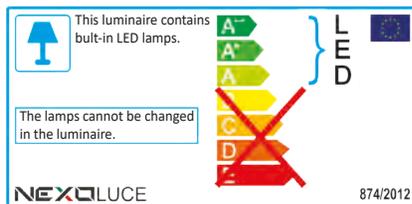


IP40 IK08

Variable	Lamp	Input	Power
D	LED	220/240V AC 50/60Hz	2,4 W
X	LED	90-250V DC 120-250V AC 50/60Hz	2,6 W
Y	LED	15-27V DC	2,9 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5298	D 3H EM. KIT INTEGRATED (NON MAINTAINED)	2 IP40	C 4000 K	A24 2,4 W (D VARIABLE ONLY)	BL NARROW (corridors)	1 ON / OFF	.A WHITE
	X CBS 230V AC			A26 2,6 W (X VARIABLE ONLY)	BM WIDE (open areas)		
	Y CBS 24V DC			A29 2,9 W (Y VARIABLE ONLY)			

CODE EXAMPLE:

Spotlight em. luminaire white light color at 4000K, IP40, 2,4W, for corridors, ON/OFF control, frame white color with 3 hours em. kit (non maintained) **5298D2CA24BL1.A**



USCITA 4

SIGNAGE

IP40


LED

3W



2,2W

1,6W


cod. 5355 /// USCITA 4

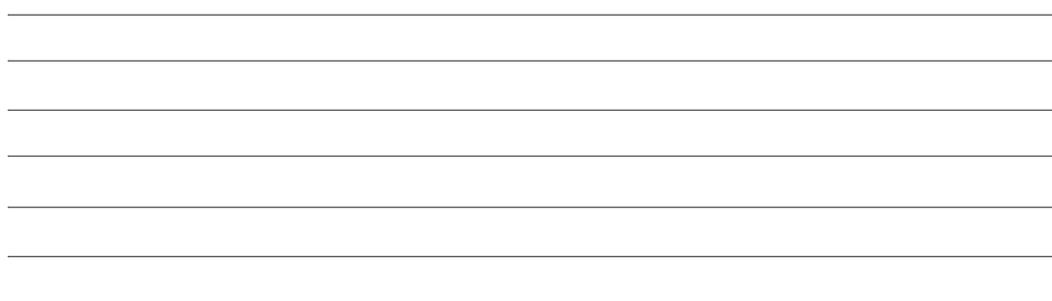


- Emergency exit light
- ABS body
- Wall or ceiling mounting (accessories included)
- Available with 3 hours EM. kit integrated (maintained or non maintained) or configured for central battery system 230V AC (CBS 230V AC) and 24V DC (CBS 24V DC)
- Standard or customized pictograms set available on request
- Recessed or suspension kit mounting available on request

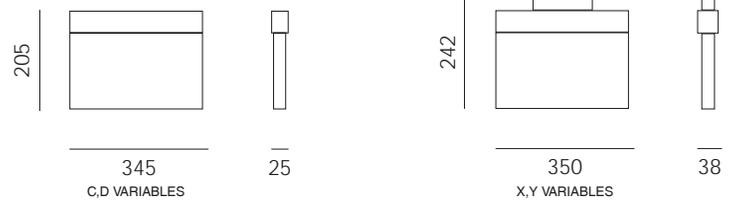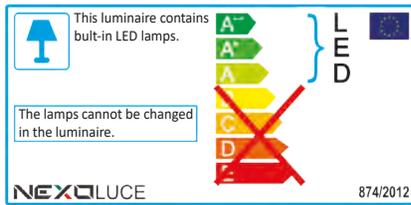

PICTOGRAMS SET (ON REQUEST)




code: 003.0057.0



code: 003.0058.0



code: 003.0073.0




code: 003.0074.0




code: 003.0075.0

INSTALLATION KIT (ON REQUEST)



Recessed kit code: 003.0078.0



Suspension kit with chain code: 003.0079.0



code: 003.0076.0



code: 003.0077.0




Variable	Lamp	Input	Power
C, D	LED	220/240VAC 50/60Hz	3 W
X	LED	55-250V DC 100-250V AC 50/60Hz	2,2 W
Y	LED	24V DC	1,6 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5355	C 3H EM. KIT INTEGRATED (MAINTAINED)	2 IP40	C 4000 K	.03 3 W (C,D VARIABLES)	.L NO LENS	1 ON / OFF	.A WHITE
	D 3H EM. KIT INTEGRATED (NON MAINTAINED)			A22 2,2 W (X VARIABLE ONLY)			
	X CBS 230V AC			A16 1,6 W (Y VARIABLE ONLY)			
	Y CBS 24V DC						

CODE EXAMPLE:

Emergency exit light with white natural light color at 4000K, IP40, 3W, no lens, ON/OFF control, frame white color with 3 hours em. kit (maintained)

5355C2C.03.L1.A



EMERGENZA IP65

SIGNAGE

IP65

LED



4,5W

2,8W


2,0W

cod. 5451 /// EMERGENZA IP65


- Waterproof emergency light
- PC+ABS body
- Frosted polycarbonate diffuser
- Wall or ceiling mounting
- Available with 3 hours EM. kit integrated (maintained or non maintained) or configured for central battery system 230V AC (CBS 230V AC) and 24V DC (CBS 24V DC)
- Plastic double side diffuser kit available on request
- Standard or customized pictograms set available on request

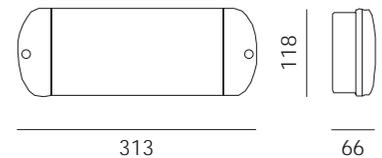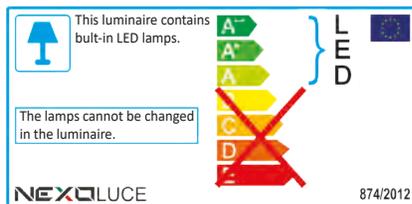

PICTOGRAMS SET (ON REQUEST)




code: 003.0208.0



code: 003.0209.0



code: 003.0210.0



code: 003.0211.0



code: 003.0212.0



code: 003.0213.0



code: 003.0214.0




code: 003.0215.0



code: 003.0216.0

INSTALLATION KIT (ON REQUEST)



Plastic double side diffuser kit
code: 003.0207.0



code: 003.0213.0



code: 003.0214.0



Variable	Lamp	Input	Power
C, D	LED	220/240Vac 50/60Hz	4,5 W
X	LED	85-250V DC 100-250V AC 50/60Hz	2,8 W
Y	LED	15-30V DC	2,0 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5451	C 3H EM. KIT INTEGRATED (MAINTAINED)	5 IP65	C 4000 K	A45 4,5 W (C,D VARIABLES)	AG FROSTED DIFFUSER	1 ON / OFF	.A WHITE
	D 3H EM. KIT INTEGRATED (NON MAINTAINED)			A28 2,8 W (X VARIABLE ONLY)			
	X CBS 230V AC			.02 2,0 W (Y VARIABLE ONLY)			
	Y CBS 24V DC						


CODE EXAMPLE:

Waterproof emergency light white light color at 4000K, IP65, 4,5W, frosted diffuser, ON/OFF control, frame white color with 3 hours em. kit (maintained) **5451C5CA45AG1.A**

STRIP

STRIP INLUX LED LB

STRIP



IP20





IP65

LED

7W/m


cod. 5038 /// STRIP INLUX LED LB

- Strip led low bright
- Silicon waterproof sleeve
- Adhesive tape for fixing
- Connecting cables
- Max lenght connectable 5 meters

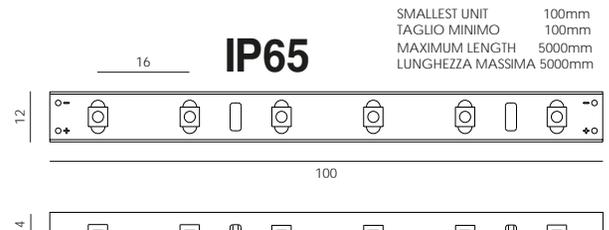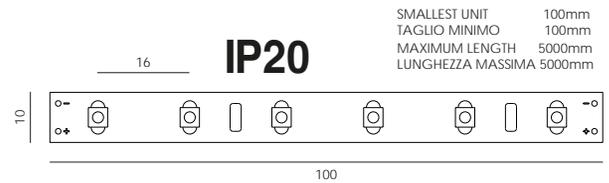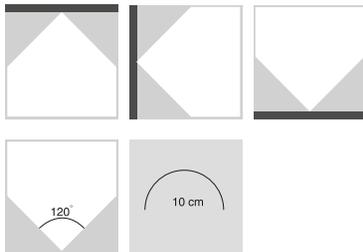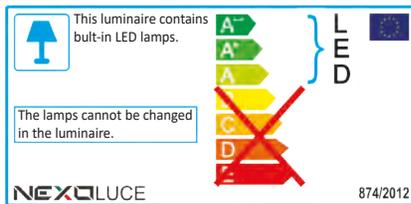

IP20
IP65

Lamp	Input	Power
LED	24 V DC	7 W / m

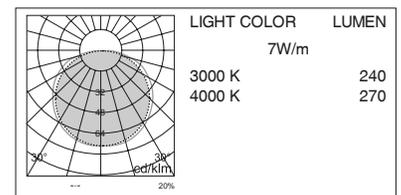

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	VERSION	CONTROL	LENGTH
5038	1	1 IP20	B 3000 K	.7M 7 W / m	MC MALE CONNECTION	6 24 V DC	50 5.0 m
		5 IP65	C 4000 K		MF MALE-FEMALE CONNECTIONS		XX *m on request



CODE EXAMPLE:

Strip led with warm white light color at 3000K, IP20, 7W/m, male connection, 24VDC, 5.0m lenght

503811B.7MMC650

STRIP INLUX LED HB

STRIP



IP20





IP65

LED

15W/m

cod. 5039 /// STRIP INLUX LED HB


- Strip led high bright
- Silicon waterproof sleeve
- Adhesive tape for fixing
- Connecting cables
- Max lenght connectable 5 meters

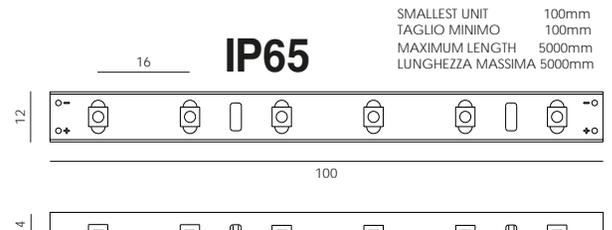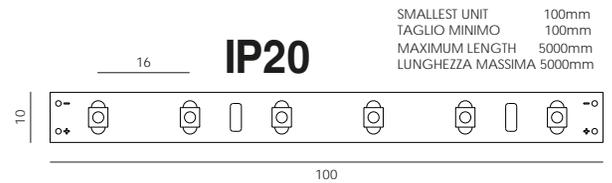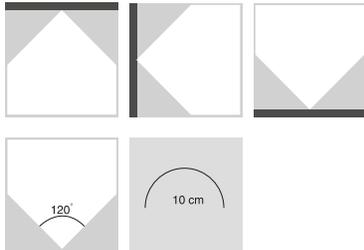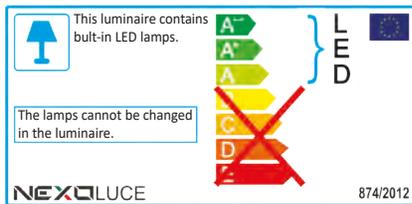

IP20

IP65    

Lamp	Input	Power
LED	24 V DC	15 W / m

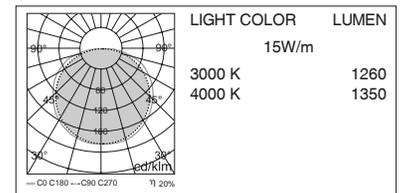

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	VERSION	CONTROL	LENGTH
5039	1	1 IP20	B 3000 K	15M 15 W / m	MC MALE CONNECTION	6 24 V DC	50 5.0 m
		5 IP65	C 4000 K		MF MALE-FEMALE CONNECTIONS		XX *m on request

CODE EXAMPLE:

Strip led with warm white light color at 3000K, IP65, 15W/m, male connection, 24VDC, 5.0m lenght

503911B15MMC650



RIGA LB

STRIP

IP20


IP65

LED


7W/m

cod. 5115 /// RIGA LB


- Strip led low bright
- Aluminium profile
- Waterproof silicone sleeve (only for outdoor version)
- Plastic clips for installation
- Connection plugs
- Polycarbonate cover

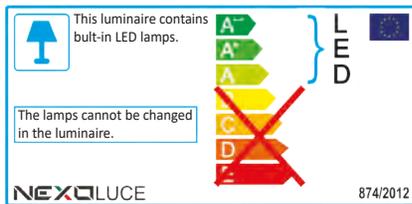

AVAILABLE SIZES
MISURE DISPONIBILI 500 / 1000 / 1500 / 2000 mm

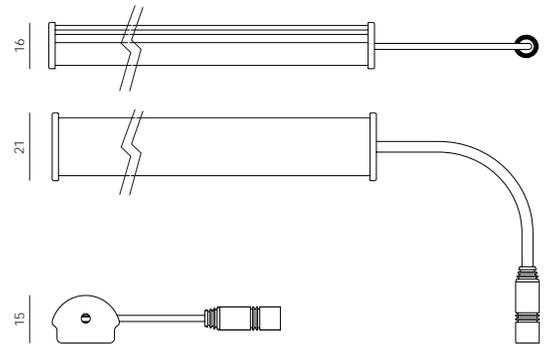

ACCESSORIES

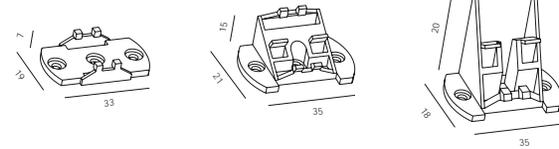

CLIP 0° (1 pc)

code/codice: 003.0030.A

CLIP 30° (1 pc)

code/codice: 003.0031.A


CLIP 60° (1 pc)

code/codice: 003.0032.A

IP20

IP65

Lamp	Input	Power
LED	24 V DC	7 W / m

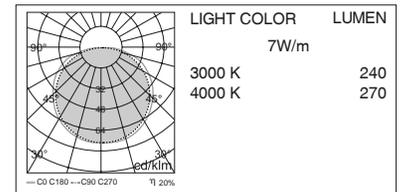

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
5115	1	1	IP20	.7M 7 W / m	.R	6 24 V DC	05 0,5 m
		5	IP65		.S		10 1,0 m
					.T		15 1,5 m
					.U		20 2,0 m
					.W		

CODE EXAMPLE:

Strip led into profile with warm white light color at 3000K, IP20, 7W/m, 120° clear optic, 24VDC, 1.0m length

511511B.7M.R610



RIGA HB

STRIP

IP20



IP65

LED


15W/m

cod. 5306 /// RIGA HB


- Strip led high bright
- Aluminium profile
- Waterproof silicone sleeve (only for outdoor version)
- Plastic clips for installation
- Connection plugs
- Polycarbonate cover

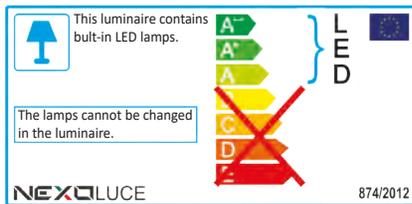

AVAILABLE SIZES
MISURE DISPONIBILI 500 / 1000 / 1500 / 2000 mm

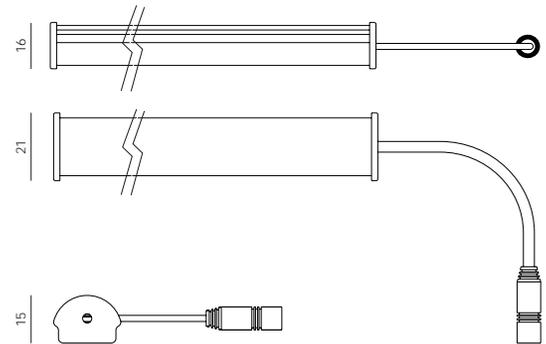

ACCESSORIES

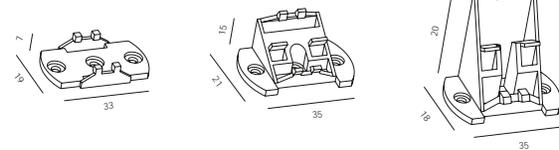


CLIP 0° (1 pc)
code/codice: 003.0030.A

CLIP 30° (1 pc)
code/codice: 003.0031.A

CLIP 60° (1 pc)
code/codice: 003.0032.A

IP20
IP65

Lamp	Input	Power
LED	24 V DC	15 W / m

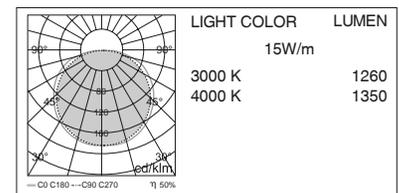

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
5306	1	1 IP20	B 3000 K	15M 15 W / m	.R 120° CLEAR	6 24 V DC	05 0,5 m
		5 IP65	C 4000 K		.S 120° FROST		10 1,0 m
					.T 30° FROST		15 1,5 m
					.U 60° FROST		20 2,0 m
					.W 90° FROST		

CODE EXAMPLE:

Strip led into profile with warm white light color at 3000K, IP20, 15W/m, 120° clear optic, 24VDC, 1.0m lenght

530611B15M.R610



RIGA INCASSO LB

STRIP

IP20

IP65





LED

7W/m

cod. 5301 /// RIGA INCASSO LB




- Strip led low bright
- Aluminium profile
- Waterproof silicone sleeve (only for outdoor version)
- Adhesive strip for fixing 3M (only for outdoor version)
- Plastic clips for installation
- Connection plugs
- Polycarbonate cover

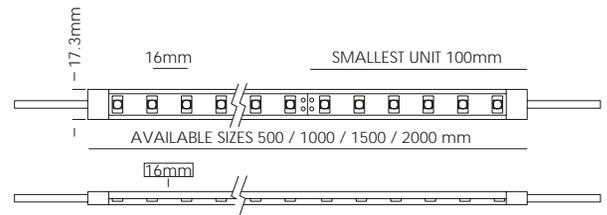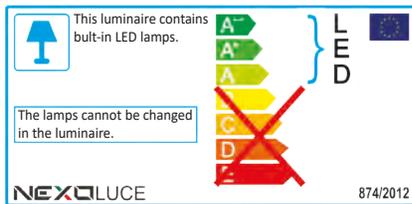

IP20

IP65

Lamp	Input	Power
LED	24 V DC	7 W / m

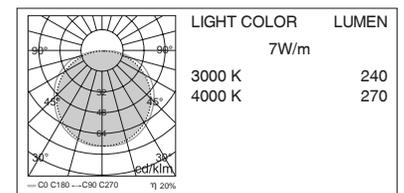


CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
5301	1	1 IP20	B 3000 K	.7M 7 W / m	.R 120° CLEAR	6 24 V DC	05 0,5 m
		5 IP65	C 4000 K		.S 120° FROST		10 1,0 m
					.T 30° FROST		15 1,5 m
					.U 60° FROST		20 2,0 m
					.W 90° FROST		

CODE EXAMPLE:

Strip led into profile with warm white light color at 3000K, IP20, 7W/m, 120° clear optic, 24VDC, 1.0m lenght

53011B.7M.R610



RIGA INCASSO HB

STRIP

IP20

IP65




LED

15W/m


cod. 5065 /// RIGA INCASSO HB



- Strip led high bright
- Aluminium profile
- Waterproof silicone sleeve (only for outdoor version)
- Adhesive strip for fixing 3M (only for outdoor version)
- Plastic clips for installation
- Connection plugs
- Polycarbonate cover

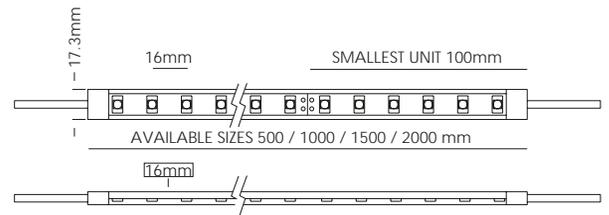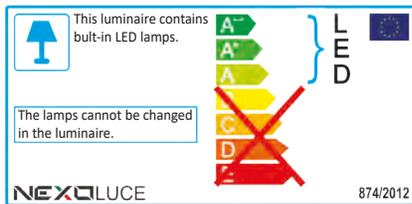


PROFILE



IP20

IP65

Lamp	Input	Power
LED	24 V DC	15 W / m

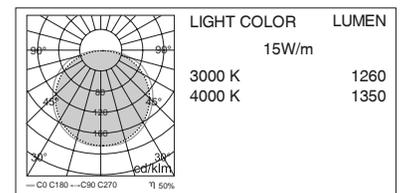

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
5065	1	1 IP20	B 3000 K	15M 15 W / m	.R 120° CLEAR	6 24 V DC	05 0,5 m
		5 IP65	C 4000 K		.S 120° FROST		10 1,0 m
					.T 30° FROST		15 1,5 m
					.U 60° FROST		20 2,0 m
					.W 90° FROST		

CODE EXAMPLE:

Strip led into profile with warm white light color at 3000K, IP20, 15W/m, 120° clear optic, 24VDC, 1.0m length

506511B15M.R610



GOMMA H

STRIP





IP67

LED

12W/m

cod. 5035 /// GOMMA H


- Horizontal flexible led linear light for indoor and outdoor installation
- Bending diameter of 300mm, beam angle 10% 160°
- UV, flame, solvents and saltwater resistant construction
- Injection-moulded input connector available in three positions (bottom, side and top end) with cable length 1m
- Injection-moulded end cap pre-installed
- Connecting cables and mounting profiles available on request
- Continuous length up to 10m by powering one end
- Minimum cutting length 55,6mm
- Power supply excluded

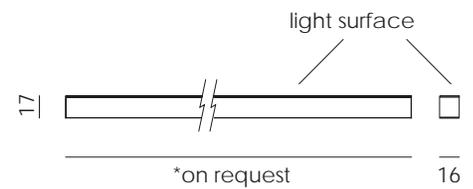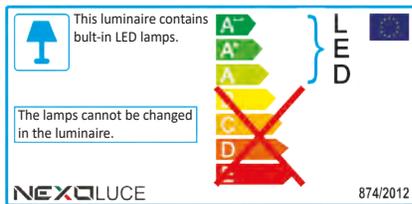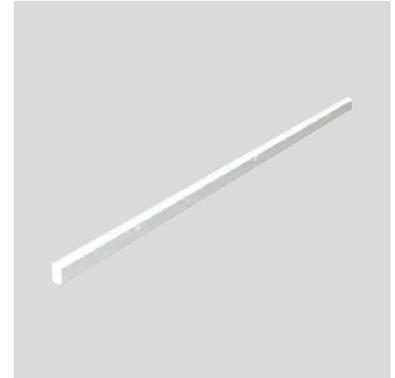

INJECTION-MOULDED INPUT CONNECTORS (RECOMMENDED, ASSEMBLED IN FACTORY)



S BOTTOM IN **T** SIDE IN **U** TOP END IN **V** NO IN

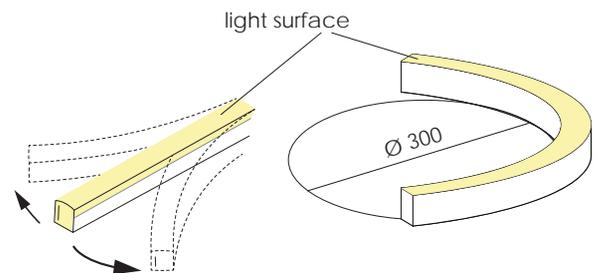

IP67 IK08  

Lamp	Input	Power
SMD LED	24 V DC	12 W / m

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
5035	S BOTTOM IN	7 IP67	B 3000 K	12M 12 W / m	AD OPAL DIFFUSER	6 24 V DC	M1 10.0 m
	T SIDE IN		C 4000 K				XX *m on request
	U TOP END IN		8 BLUE				
	V NO IN						

CODE EXAMPLE:

Linear led light with bottom in injection-moulded connector, with warm white light color at 3000K, IP67, 12W/m, 24VDC, 10.0m length

5035S7B12MAD6M1



GOMMA V

STRIP





IP67

LED

12W/m

cod. 5034 /// GOMMA V


- Vertical flexible led linear light for indoor and outdoor installation
- Bending diameter of 300mm, beam angle 10% 160°
- UV, flame, solvents and saltwater resistant construction
- Injection-moulded input connector available in three positions (bottom, side and top end) with cable length 1m
- Injection-moulded end cap pre-installed
- Connecting cables and mounting profiles available on request
- Continuous length up to 10m by powering one end
- Minimum cutting length 55,6mm
- Power supply excluded

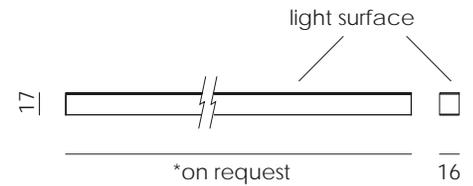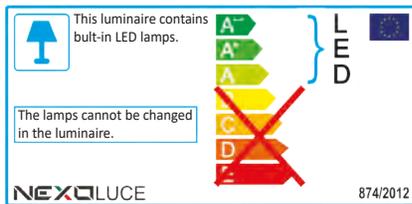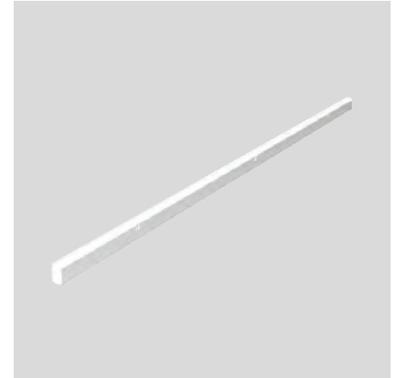

INJECTION-MOULDED INPUT CONNECTORS (RECOMMENDED, ASSEMBLED IN FACTORY)



S BOTTOM IN **T** SIDE IN **U** TOP END IN **V** NO IN

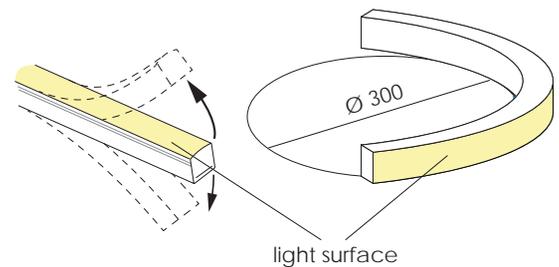

IP67 IK08  

Lamp	Input	Power
SMD LED	24 V DC	12 W / m

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
5034	S BOTTOM IN	7 IP67	B 3000 K	12M 12 W / m	AD OPAL DIFFUSER	6 24 V DC	M1 10.0 m
	T SIDE IN		C 4000 K				XX *m on request
	U TOP END IN		8 BLUE				
	V NO IN						

CODE EXAMPLE:

Linear led light with bottom in injection-moulded connector, with warm white light color at 3000K, IP67, 12W/m, 24VDC, 10.0m length

5034S7B12MAD6M1



RIGA SCALA

STRIP



IP20

LED

3W/m

cod. 2106 /// RIGA SCALA

- Aluminium anodized profile with linear led light on the top for signaling stairs in dark places such as theatre and cinema auditoriums
- Fixing to the finished edge on the stairs with screws or glue
- No visible led spot
- Available with: input and letter on the right (RIGHT PS&L), input and letter on the left (LEFT PS&L), input on the right and no letter (RIGHT PSNL), input on the left and no letter (LEFT PSNL)
- Power supply excluded

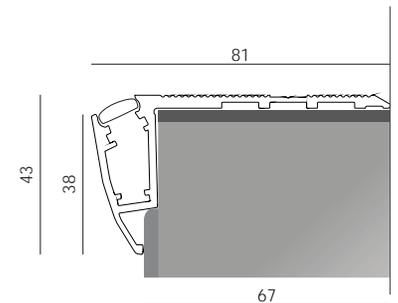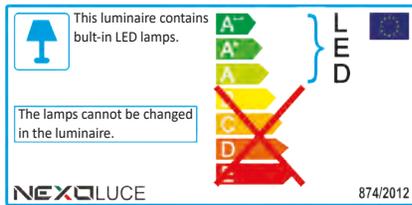

ACCESSORIES



LETTER/NUMBER FOR LINEA SCALA (1 pc)
code/codice: 003.0111.0

IP20

Lamp	Input	Power
LED	24 V DC	3 W / m


CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
2106	M RIGHT PS&L	1 IP20	7 RED FILTER	03M 3 W / m	.L NO LENS	6 24 V DC	13 1,3 m
	N LEFT PS&L		L BLUE FILTER				16 1,6 m
	P RIGHT PSNL						17 1,7 m
	Q LEFT PSNL						

CODE EXAMPLE:

Linea Scala with right power supply and letter, IP20, with red filter light color, 3W/m, no lens optic, 24VDC, 1.3m length

2106M1703M.L613

TRACK



FRECCIA S

TRACK




IP20

LED

15W

cod. 5432 /// FRECCIA S

- Track mounted LED projector
- Die-cast aluminium and thermoplastic material body
- 3 circuit track adaptor universally compatible with the main international track brands
- Total lighting output: 1300 lm
- Luminous efficacy: >90 lm/W
- Life Time: 50.000hrs L80 B10 (Ta 40°C)
- CRI: 80Ra
- PF>0.9

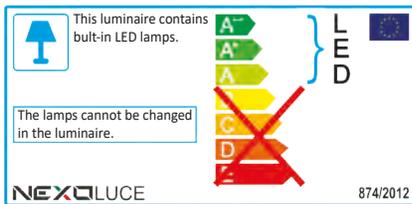

IP20


Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	15 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5432	. WITHOUT EM. KIT	1 IP20	B 3000 K	.15 15 W	BC 15°	1 ON / OFF	.A WHITE
			C 4000 K		CN 28°	0 DIMMER 0-10V	.D BLACK
					BD 38°		

CODE EXAMPLE:

Projector with light color at 3000K, IP20, 15W, 15° optic, ON/OFF control, white color, without emergency kit

5432.1B.15BC1.A



FRECCIA M

TRACK




IP20

LED

25W

cod. 5433 /// FRECCIA M

- Track mounted LED projector
- Die-cast aluminium and thermoplastic material body
- 3 circuit track adaptor universally compatible with the main international track brands
- Total lighting output: 2200 lm
- Luminous efficacy: >90 lm/W
- Life Time: 50.000hrs L80 B10 (Ta 40°C)
- CRI: 80Ra
- PF>0.9

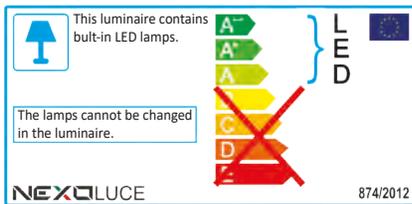

IP20


Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	25 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5433	. WITHOUT EM. KIT	1 IP20	B 3000 K	.25 25 W	CM 18°	1 ON / OFF	.A WHITE
			C 4000 K		CN 28°	0 DIMMER 0-10V	.D BLACK
					BP 43°	7 DIM. DALI	

CODE EXAMPLE:

Projector with light color at 3000K, IP20, 25W, 18° optic, ON/OFF control, white color, without emergency kit

5433.1B.25CM1.A



FRECCIA L

TRACK




IP20

LED

30/40W

cod. 5434 /// FRECCIA L

- Track mounted LED projector
- Die-cast aluminium and thermoplastic material body
- 3 circuit track adaptor universally compatible with the main international track brands
- Total lighting output: 2700 / 3600 lm
- Luminous efficacy: >90 lm/W
- Life Time: 50.000hrs L80 B10 (Ta 40°C)
- CRI: 80Ra
- PF>0.9

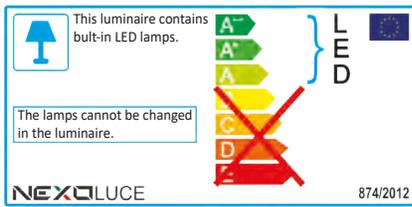

IP20



Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	30 / 40 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5434	. WITHOUT EM. KIT	1 IP20	B 3000 K	.30 30 W	CM 18°	1 ON / OFF	.A WHITE
			C 4000 K	.40 40 W	CN 28°	0 DIMMER 0-10V	.D BLACK
					BP 43°	7 DIM. DALI	

CODE EXAMPLE:

Projector with light color at 3000K, IP20, 30W, 18° optic, ON/OFF control, white color, without emergency kit

5434.1B.30CM1.A



IP20

BINARIO 2

TRACK

NEVALUCE®

BINARIO 2

- Electrified tracks three phase, with 3 circuits
- ON/OFF, DALI and DIMM 0/10V control on the same track
- Extruded aluminium body
- Copper electrical cables insulated in extruded PVC profile
- Ceiling or suspended installation
- Available track lengths: 1000mm, 2000mm (+/-5mm)



SINGLE PHASE 220/240V

IT ALLOWS A TOTAL LOAD OF 16A CORRESPONDING TO 3680W DIVIDED AMONG THE 3 CIRCUITS

THREE PHASE 220/240V



IT ALLOWS A TOTAL LOAD OF 16A CORRESPONDING TO 11040W DIVIDED AMONG THE 3 CIRCUITS

MONOFASE 220/240V



CONSENTE UN CARICO TOTALE DI 16A CHE CORRISPONDONO A 3680W SUDDIVISI SU 3 CIRCUITI

TRIFASE 220/240V

CONSENTE UN CARICO TOTALE DI 16A CHE CORRISPONDONO A 11040W SUDDIVISI SU 3 CIRCUITI



MAXIMUM LOAD / CARICO MASSIMO

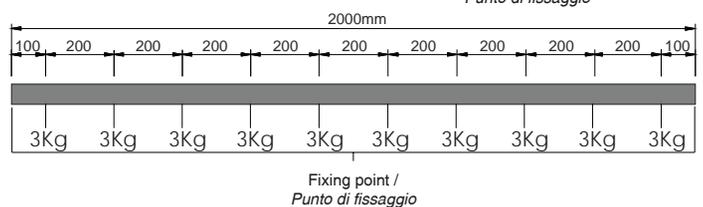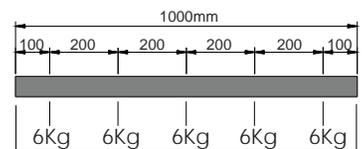

IP20

Input / Alimentazione 220/240V - 50/60 Hz


ACCESSORIES PAGE 466

CODE	LENGHT	FRAME COLOR
001.0019.A	1000mm	.A WHITE
001.0020.A	2000mm	.D BLACK
001.0021.D	1000mm	
001.0022.D	2000mm	

CODE EXAMPLE:

Electrified track three phase, ceiling installation, lenght 1000mm, white frame color

001.0019.A



BINARIO 2 R

TRACK

IP20

BINARIO 2 R



- Electrified tracks three phase, with 3 circuits
- ON/OFF, DALI and DIMM 0/10V control on the same track
- Extruded aluminium body
- Copper electrical cables insulated in extruded PVC profile
- Recessed installation
- Available track lengths: 1000mm, 2000mm (+/-5mm)



SINGLE PHASE 220/240V

IT ALLOWS A TOTAL LOAD OF 16A CORRESPONDING TO 3680W DIVIDED AMONG THE 3 CIRCUITS

THREE PHASE 220/240V




IT ALLOWS A TOTAL LOAD OF 16A CORRESPONDING TO 11040W DIVIDED AMONG THE 3 CIRCUITS

MONOFASE 220/240V



CONSENTE UN CARICO TOTALE DI 16A CHE CORRISPONDONO A 3680W SUDDIVISI SU 3 CIRCUITI

TRIFASE 220/240V

CONSENTE UN CARICO TOTALE DI 16A CHE CORRISPONDONO A 11040W SUDDIVISI SU 3 CIRCUITI

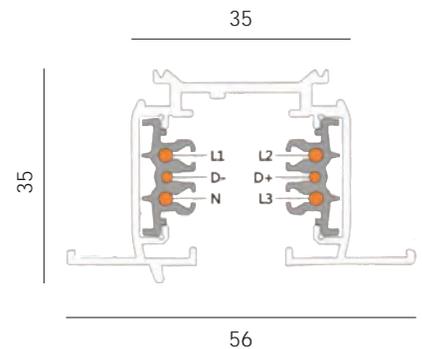

MAXIMUM LOAD / CARICO MASSIMO

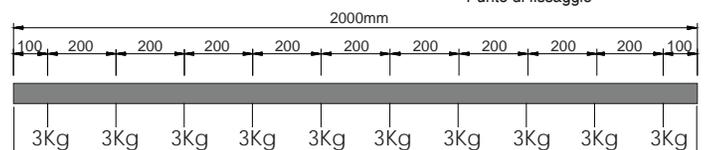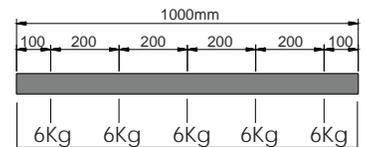

IP20

Input / Alimentazione 220/240V - 50/60 Hz

ACCESSORIES PAGE 468

CODE	LENGTH	FRAME COLOR
001.0023.A	1000mm	.A WHITE
001.0024.A	2000mm	.D BLACK
001.0025.D	1000mm	
001.0026.D	2000mm	

CODE EXAMPLE:

Electrified track three phase, recessed installation, length 1000mm, white frame color

001.0023.A

ACCESSORIES



GOMMA H

STRIP

IP67

LED

12W/m

cod. 5035 /// GOMMA H

ACCESSORIES (CAN BE ASSEMBLED BY END USER)



BOTTOM CONNECTOR IP67
(Connects light to power supply, cable length 1m)
code: **003.0143.0**



SIDE CONNECTOR IP67
(Connects light to power supply, cable length 1m)
RIGHT version code: **003.0144.0**
LEFT version code: **003.0145.0**



FRONT CONNECTOR IP67
(Connects light to power supply, cable length 1m)
code: **003.0133.0**



END CAP IP67
(Termination protection of the light)
code: **003.0134.0**



JUMPER IP67
(Connects two pieces of lights together with a flexible cable)
Cable length 0.3m code: **003.0135.0**
Cable length 1m code: **003.0146.0**
Cable length 3m code: **003.0147.0**



POWER T-FEED IP67
(Connects two pieces of lights together with a T joint, energized from middle; cables length 0.3m)
code: **003.0136.0**



SPRING CLIP ALUMINIUM PROFILE
Width: 20,7mm, Height 22,3 mm,
Length 500mm code: **003.0139.H**
Length 1000mm code: **003.0138.H**
Length 2000mm code: **003.0137.H**



PLASTIC PROFILE
Width: 19mm, Height 21 mm,
Length 500mm code: **003.0142.0**
Length 1000mm code: **003.0141.0**
Length 2000mm code: **003.0140.0**



BENDABLE STAINLESS STEEL PROFILE
Width: 17,5mm, Height 20,0 mm,
Length 300mm code: **003.0148.G**
Length 500mm code: **003.0149.G**
Length 900mm code: **003.0150.G**

INSTALLATION WAY



INSTALLATION WAY




INSTALLATION WAY



MALE & FEMALE CONNECTOR IP68
code: **003.0151.0**



CUTTER
(It is necessary for the correct cutting of the light for assembly of the accessory connectors) code: **003.0161.0**



INDUCER
(It is necessary for the correct insertion of the pins of the accessory connectors into the light) code: **003.0162.0**



GOMMA V

STRIP

IP67

LED

12W/m

cod. 5034 /// GOMMA V

ACCESSORIES (CAN BE ASSEMBLED BY END USER)



BOTTOM CONNECTOR IP67
(Connects light to power supply, cable length 1m)
code: **003.0152.0**



SIDE CONNECTOR IP67
(Connects light to power supply, cable length 1m)
RIGHT version code: **003.0153.0**
LEFT version code: **003.0154.0**



FRONT CONNECTOR IP67
(Connects light to power supply, cable length 1m)
code: **003.0155.0**



END CAP IP67
(Termination protection of the light)
code: **003.0156.0**



JUMPER IP67
(Connects two pieces of lights together with a flexible cable)
Cable length 0.3m code: **003.0158.0**
Cable length 1m code: **003.0159.0**
Cable length 3m code: **003.0160.0**



POWER T-FEED IP67
(Connects two pieces of lights together with a T joint, energized from middle; cables length 0.3m)
code: **003.0157.0**



SPRING CLIP ALUMINIUM PROFILE
Width: 20,7mm, Height 22,3 mm,
Length 500mm code: **003.0139.H**
Length 1000mm code: **003.0138.H**
Length 2000mm code: **003.0137.H**



PLASTIC PROFILE
Width: 19mm, Height 21 mm,
Length 500mm code: **003.0142.0**
Length 1000mm code: **003.0141.0**
Length 2000mm code: **003.0140.0**



BENDABLE STAINLESS STEEL PROFILE
Width: 17,5mm, Height 20,0 mm,
Length 300mm code: **003.0148.G**
Length 500mm code: **003.0149.G**
Length 900mm code: **003.0150.G**

INSTALLATION WAY



INSTALLATION WAY




INSTALLATION WAY





MALE & FEMALE CONNECTOR IP68
code: **003.0151.0**



CUTTER
(It is necessary for the correct cutting of the light for assembly of the accessory connectors) code: **003.0161.0**



INDUCER
(It is necessary for the correct insertion of the pins of the accessory connectors into the light) code: **003.0162.0**



IP20


BINARIO 2

TRACK

NEVALUCE®

BINARIO 2


ACCESSORIES



Right live-end / Alimentatore Dx




code: **001.0186.A** White / Bianco
code: **001.0187.D** Black / Nero



Left live-end / Alimentatore Sx




code: **001.0188.A** White / Bianco
code: **001.0189.D** Black / Nero




Inside L joint / Giunto L interno




code: **001.0190.A** White / Bianco
code: **001.0191.D** Black / Nero



Outside L joint / Giunto L esterno




code: **001.0192.A** White / Bianco
code: **001.0193.D** Black / Nero



Right T joint / Giunto T DX




code: **001.0194.A** White / Bianco
code: **001.0195.D** Black / Nero



Left T joint / Giunto T SX




code: **001.0196.A** White / Bianco
code: **001.0197.D** Black / Nero




X joint / Giunto X

code: **001.0198.A** White / Bianco
code: **001.0199.D** Black / Nero




Electrical straight joint / Giunto lineare con contatti

code: **001.0200.A** White / Bianco
code: **001.0201.D** Black / Nero




Central connector and straight joint / Alimentazione centrale e giunto lineare

code: **001.0202.A** White / Bianco
code: **001.0203.D** Black / Nero




Flexible joint / Giunto flessibile

code: **001.0204.A** White / Bianco
code: **001.0205.D** Black / Nero




Dead end cap / Tappo di chiusura

code: **001.0206.A** White / Bianco
code: **001.0207.D** Black / Nero



Ceiling kit / Kit attacco soffitto


code: **001.0208.A** White / Bianco
code: **001.0209.D** Black / Nero




Suspension kit with steel wire 1500mm / Kit sospensione cavo in acciaio 1500mm

code: **001.0210.A** White / Bianco
code: **001.0211.D** Black / Nero

Track connection / Connessione binario e accessori

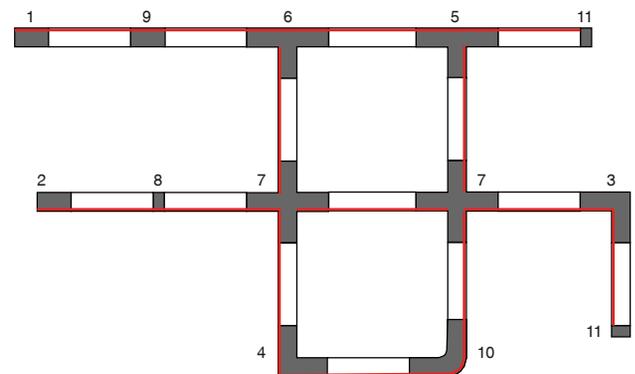

View from the floor to the ceiling / Vista dal pavimento verso il soffitto
The red line indicates the continuity of the ground line / La linea rossa indica la continuità della linea di messa a terra




BINARIO 2 R


TRACK

IP20


BINARIO 2 R

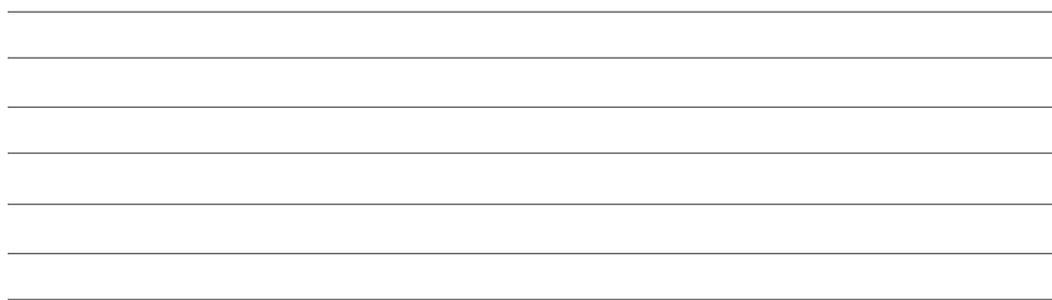


ACCESSORIES




Right live-end / Alimentatore Dx




code: **001.0212.A** White / Bianco
code: **001.0213.D** Black / Nero




Left live-end / Alimentatore Sx




code: **001.0214.A** White / Bianco
code: **001.0215.D** Black / Nero




Inside L joint / Giunto L interno




code: **001.0216.A** White / Bianco
code: **001.0217.D** Black / Nero




Outside L joint / Giunto L esterno




code: **001.0218.A** White / Bianco
code: **001.0219.D** Black / Nero




Right T joint / Giunto T DX




code: **001.0220.A** White / Bianco
code: **001.0221.D** Black / Nero



Left T joint / Giunto T SX




code: **001.0222.A** White / Bianco
code: **001.0223.D** Black / Nero




X joint / Giunto X

code: **001.0224.A** White / Bianco
code: **001.0225.D** Black / Nero




Electrical straight joint / Giunto lineare con contatti

code: **001.0200.A** White / Bianco
code: **001.0201.D** Black / Nero




Central connector and straight joint / Alimentazione centrale e giunto lineare

code: **001.0226.A** White / Bianco
code: **001.0227.D** Black / Nero




Dead end cap / Tappo di chiusura

code: **001.0206.A** White / Bianco
code: **001.0207.D** Black / Nero



Ceiling kit / Kit attacco soffitto


code: **001.0208.A** White / Bianco
code: **001.0209.D** Black / Nero



Suspension kit with steel wire 1500mm / Kit sospensione cavo in acciaio 1500mm

code: **001.0210.A** White / Bianco
code: **001.0211.D** Black / Nero

Track connection / Connessione binario e accessori

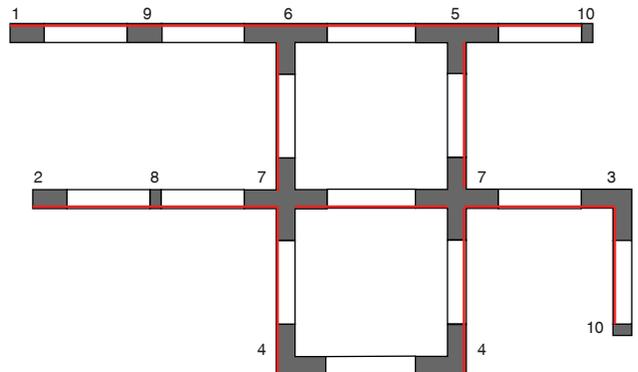

View from the floor to the ceiling / Vista dal pavimento verso il soffitto
The red line indicates the continuity of the ground line / La linea rossa indica la continuità della linea di messa a terra

SYMBOLOLOGY

Classification

Fixtures classification on the basis of electric insulation degree



Class I
Device connected to ground circuit



Class II
Device not connected to ground circuit



Class III
Device connected with low voltage

Fixtures classification on the basis of flammability degree of stand surfaces



Device that can be installed in contact with normally inflammable surfaces

IK prefix indicates resistant degree to external mechanical strikes



Protected against a strike of 10J energy



Protected against a strike of 20J energy

General symbolism



Compliant of the european community directives



Compliant of the european community directives

Specific symbolism



Maximum operating temperature



Maximum bearable load



Net weight



Recessed cutting hole



Emission characteristics



Ground emission



Single Asymmetrical wall emission



Tilt rotation



Wall emission



Double asymmetrical wall emission



Pan rotation



Ceiling emission



'Star effect' optic



Narrow emission

IP (International Protection)

The fixture's protection degree is specified by prefix IP followed by two figures: the first identifies the protection degree against entrance of solid bodies while the second against liquids

IP protection degree

first figure

- 2_ Protected against penetration of solid objects larger than 12mm
- 3_ Protected against penetration of solid objects larger than 2.5mm
- 4_ Protected against penetration of solid objects larger than 1mm
- 5_ Protected against dust
- 6_ Completely protected against dust

IP protection degree

second figure

- _0 Not protected
- _1 Protected against dripping
- _3 Protected against rain
- _4 Protected against spurtes
- _5 Protected against water projections
- _6 Protected against water projections on pressure
- _7 Resistant to immersion
- _8 Resistant to submersion

CODES STRUCTURE

Standard code

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5199	. WITHOUT EM. KIT	5 IP65	B 3000 K	.10 10 W	AR 90°	1 ON / OFF	.A WHITE
	B 3H EM. KIT IN SEPAR. BOX		C 4000 K		.Z 120°		

CODE EXAMPLE:

Recessed downlight with warm white light color at 3000K, IP65, 10W, 90° optic, ON/OFF control, frame white color without emergency kit

5199.5B.10AR1.A

Riga code

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
5115	1	1 IP20	B 3000 K	.7M 7 W / m	.R 120° CLEAR	6 24 V DC	05 0,5 m
		5 IP65	C 4000 K		.S 120° FROST		10 1,0 m

CODE EXAMPLE:

Strip led into profile with warm white light color at 3000K, IP20, 7W/m, 120° clear optic, 24VDC, 1.0m lenght

51151B.7M.R610

Strip Inlux led code

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	VERSION	CONTROL	LENGTH
5039	1	1 IP20	B 3000 K	15M 15 W / m	MC MALE CONNECTION	6 24 V DC	50 5,0 m
		5 IP65	C 4000 K		MF MALE-FEMALE CONNECTIONS		XX *m on request

CODE EXAMPLE:

Strip led with warm white light color at 3000K, IP20, 15W/m, male connection, 24VDC, 5.0m lenght

503911B15MMC650



NEXO LUCE Srl
Strada Mirabella, 10
46040 Cavriana (MN)
ITALY

T +39 0376 771513
F +39 0376 772235
inluxitalia.com

