

# CIRCUS




# applique downlight



downlight

Circus is a family of ceiling luminaires and wall lights that originate from the circle: the front portion is defined by concentric circles of different materials and finishes, such as aluminium and prismatic glass. The device takes life when switched on, when Circus becomes a strong point of the central light able to create a double luminous halo on the surface to be illuminated. This is thanks to two windows cropped in the base. It is a series of very flexible and customizable products through the decorative closing rings available in different colours to suit every environment.

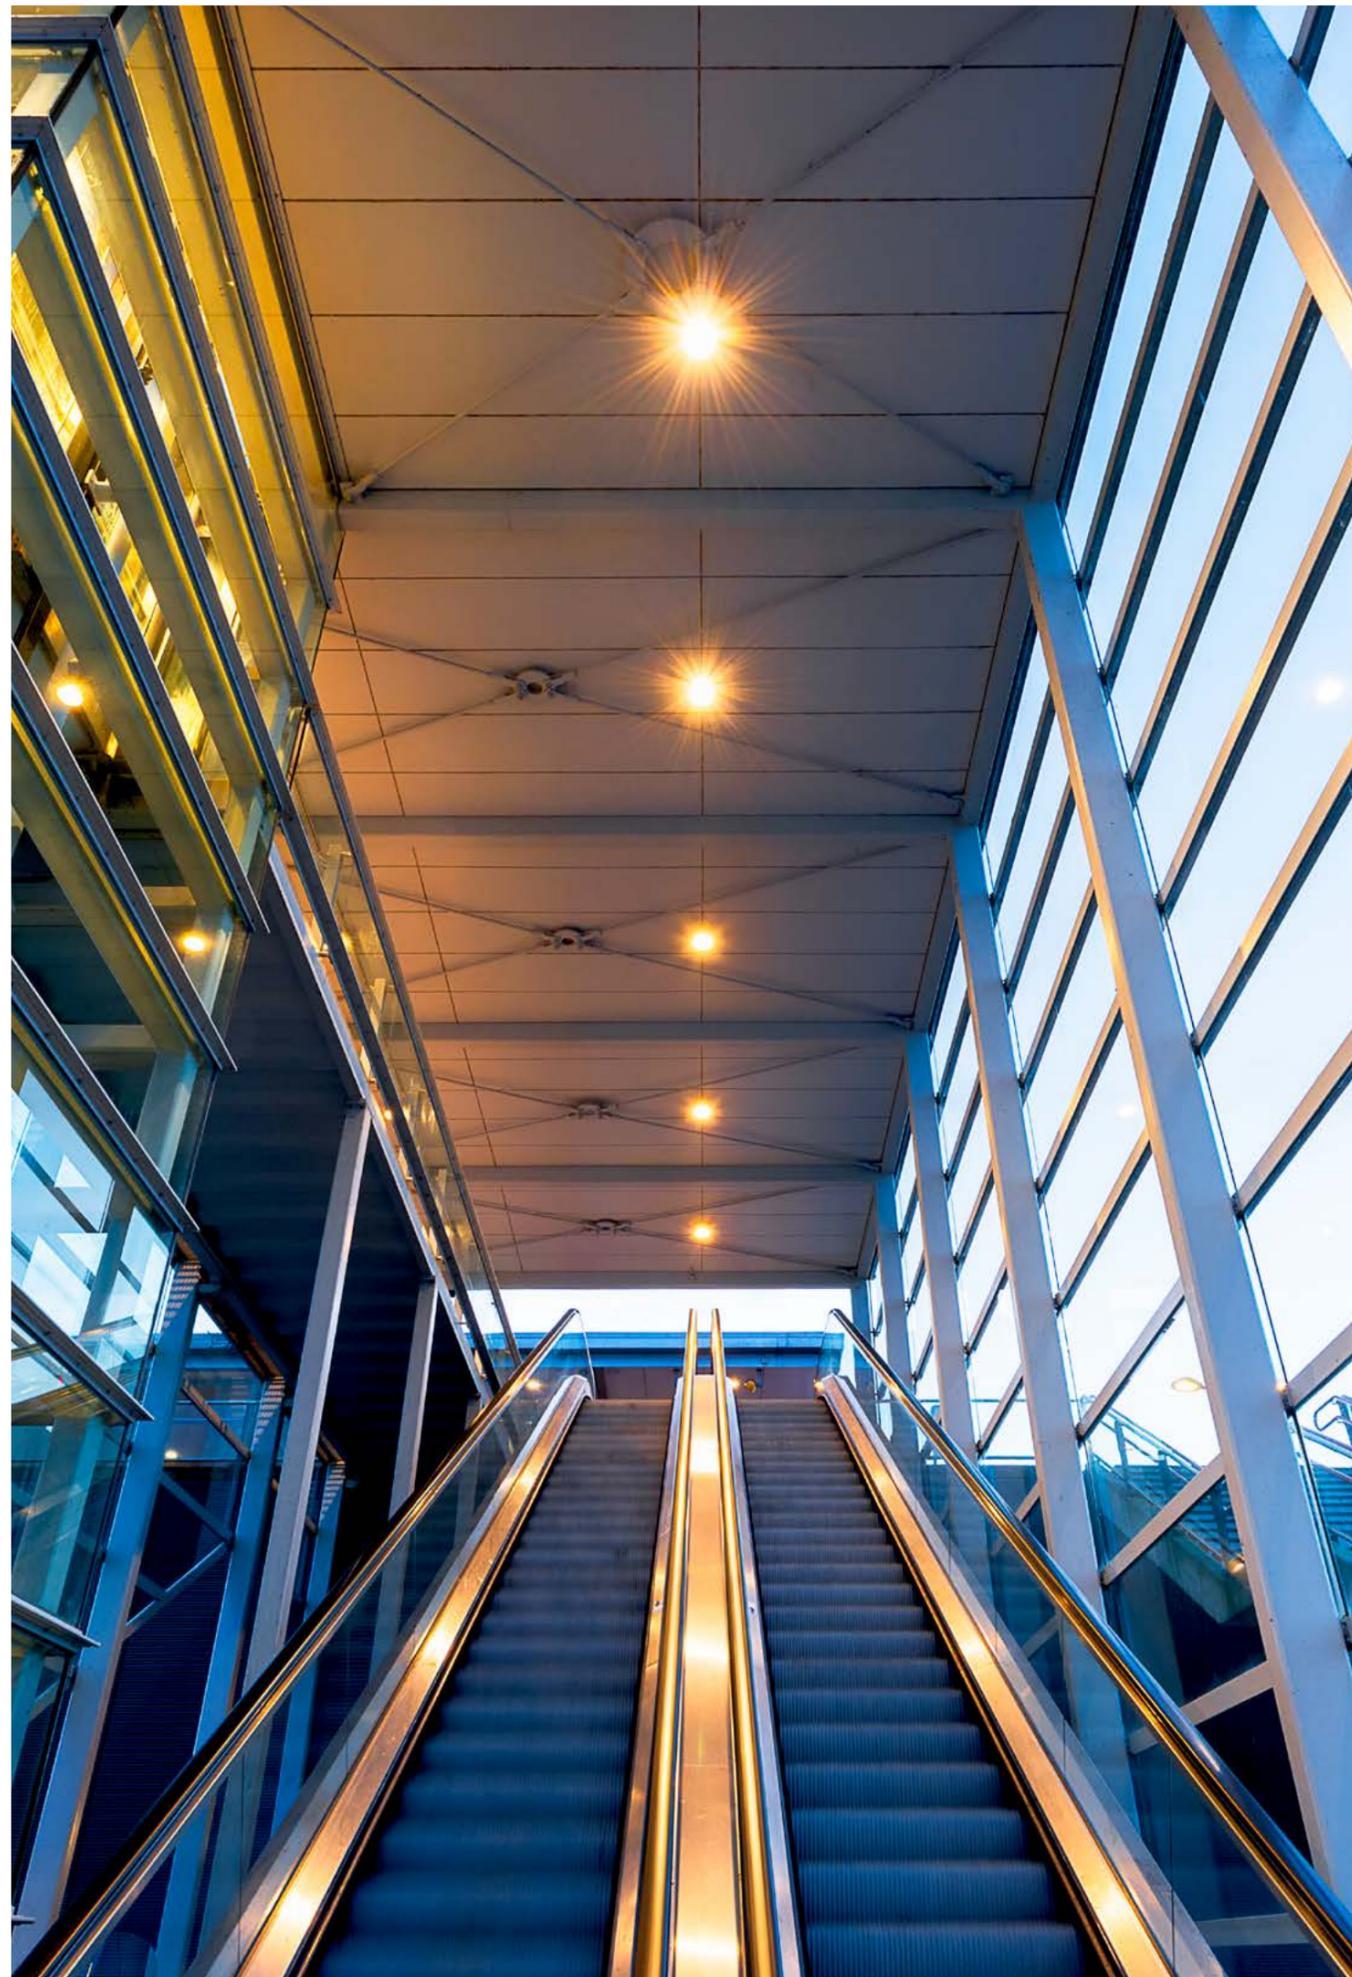


downlight

# collection



applique

IP65  
IK 08




4 mm extra clear  
prismatic glass diffuser

ø 210 x 124 mm



downlight

IP65  
IK 08



4 mm extra clear  
prismatic glass diffuser

ø 210 x 124 mm

## lighting data

WHITE COB LED

3000K CRI>80  
220-240V 50/60Hz

2700K / 4000K  
available on request



14W | 1740 lm (\*)  
diffuse  
prismatic



83°  
570 cd/klm



18,5W | 1850 lm (\*)  
diffuse  
prismatic



83°  
570 cd/klm


(\*) Real Data

## details

Die-cast body and flange made of aluminium alloy with very low copper content. Decorative ring to be ordered separately. The product is subjected to galvanic anodizing treatment divided into distinct phases: mechanical satin finishing, surface degreasing, anodic oxidation and finally fixing. Subsequently the product is painted by performing a double pass in-line process, which allows you to generate a single thick protective layer which then generates barrier against atmospheric agents and UV rays. This allows to achieve corrosion resistance performance in salt spray.

## standard finishes

## on request finishes



.06 grey




.08 anthracite



.09 bronze



.01 black



.02 white



.07 corten